



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DDTA (R1≠R2 SERIES) KA


PNP PRE-BIASED SMALL SIGNAL SURFACE MOUNT TRANSISTOR

Features

- Epitaxial Planar Die Construction
- Complementary NPN Types Available (DDTC)
- Built-In Biasing Resistors, R1≠R2
- **Lead Free/RoHS Compliant (Note 1)**
- "Green" Device, Note 2 and 3

Mechanical Data


- Case: SC-59
- Case material: Molded Plastic, "Green" Molding Compound, Note 3. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Copper leadframe).
- Terminal Connections: See Diagram
- Marking Information: See Table Below & Page 4
- Ordering Information: See Page 4
- Weight: 0.008 grams (approximate)

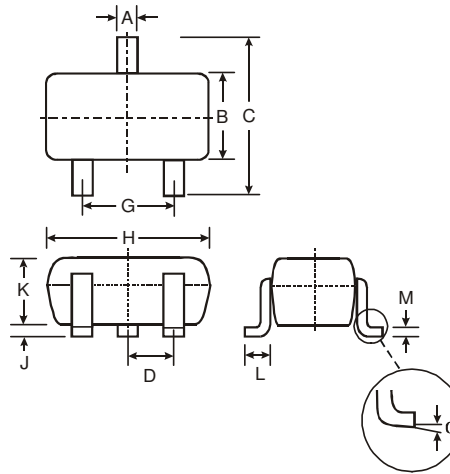


| SC-59 | | |
|----------|-------|------|
| Dim | Min | Max |
| A | 0.35 | 0.50 |
| B | 1.50 | 1.70 |
| C | 2.70 | 3.00 |
| D | 0.95 | |
| G | 1.90 | |
| H | 2.90 | 3.10 |
| J | 0.013 | 0.10 |
| K | 1.00 | 1.30 |
| L | 0.35 | 0.55 |
| M | 0.10 | 0.20 |
| α | 0° | 8° |

All Dimensions in mm

| P/N | R1 (NOM) | R2 (NOM) | Type Code |
|------------|---------------|---------------|-----------|
| DDTA113ZKA | 1K Ω | 10K Ω | P02 |
| DDTA123YKA | 2.2K Ω | 10K Ω | P05 |
| DDTA123JKA | 2.2K Ω | 47K Ω | P06 |
| DDTA143XKA | 4.7K Ω | 10K Ω | P09 |
| DDTA143FKA | 4.7K Ω | 22K Ω | P10 |
| DDTA143ZKA | 4.7K Ω | 47K Ω | P11 |
| DDTA114YKA | 10K Ω | 47K Ω | P14 |
| DDTA114WKA | 10K Ω | 4.7K Ω | P15 |
| DDTA124XKA | 22K Ω | 47K Ω | P18 |
| DDTA144VKA | 47K Ω | 10K Ω | P21 |
| DDTA144WKA | 47K Ω | 22K Ω | P22 |



Schematic and Pin Configuration



Equivalent Inverter Circuit

Maximum Ratings @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|----------------------------|-----------------|---|------|
| Supply Voltage, (3) to (2) | V _{CC} | -50 | V |
| Input Voltage, (1) to (2) | V _{IN} | +5 to -10 +5 to -12 +5 to -12 +7 to -20 +6 to -30 +5 to -30 +6 to -40 +10 to -30 +10 to -40 +15 to -40 +10 to -40 | V |
| Output Current | I _O | -100 -100 -100 -100 -100 -100 -70 -100 -50 -30 -30 | mA |

- Notes:
1. No purposefully added lead.
 2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 3. Product manufactured with Date Code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

Maximum Ratings (continued) @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|-------------|------|
| Power Dissipation | P _d | 200 | mW |
| Output Current | I _C (Max) | -100 | mA |
| Thermal Resistance, Junction to Ambient Air (Note 4) | R _{θJA} | 625 | °C/W |
| Operating and Storage Temperature Range | T _j , T _{STG} | -55 to +150 | °C |

Notes: 4. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition | | | |
|----------------------------|---------------------------------|--------------------------|---------------------|-------|------|---|------|------|--|
| Input Voltage | V _{I(off)} | -0.3 | | | V | V _{CC} = 5V, I _O = 100μA | | | |
| | | -0.3 | | | | | | | |
| -0.5 | | | | | | | | | |
| -0.3 | | | | | | | | | |
| -0.3 | | | | | | | | | |
| -0.5 | | — | — | | | | | | |
| -0.3 | | | | | | | | | |
| -0.8 | | | | | | | | | |
| -0.4 | | | | | | | | | |
| -1.0 | | | | | | | | | |
| -0.8 | | | | | | | | | |
| Input Voltage | | V _{I(on)} | | | | | -3.0 | V | V _O = -0.3V, I _O = -20mA V _O = -0.3V, I _O = -20mA V _O = -0.3V, I _O = -5mA V _O = -0.3V, I _O = -20mA V _O = -0.3V, I _O = -3mA V _O = -0.3V, I _O = -5mA V _O = -0.3V, I _O = -1mA V _O = -0.3V, I _O = -2mA V _O = -0.3V, I _O = -2mA V _O = -0.3V, I _O = -2mA V _O = -0.3V, I _O = -2mA |
| | | | | | | | -3.0 | | |
| | | | | -1.1 | | | | | |
| | | | | -2.5 | | | | | |
| | | | | -1.3 | | | | | |
| | | | — | — | | | | | |
| | | | | -1.4 | | | | | |
| | | | | -3.0 | | | | | |
| | | | | -2.5 | | | | | |
| | | | | -5.0 | | | | | |
| | | | | -4.0 | | | | | |
| | | | | -4.0 | | | | | |
| | Output Voltage | | V _{O(on)} | — | -0.1 | -0.3 | V | | |
| Input Current | I _I | | | -7.2 | mA | V _I = -5V | | | |
| | | | | -3.8 | | | | | |
| | | | | -3.6 | | | | | |
| | | | | -1.8 | | | | | |
| | | | | -1.8 | | | | | |
| | | | | -1.8 | | | | | |
| | | | | -0.88 | | | | | |
| | | | | -0.88 | | | | | |
| | | | | -0.36 | | | | | |
| | | | | -0.16 | | | | | |
| | | | | -0.16 | | | | | |
| | | | | -0.16 | | | | | |
| | | Output Current | I _{O(off)} | — | | | — | -0.5 | μA |
| DC Current Gain | G _I | -33 | | | — | V _O = -5V, I _O = -10mA | | | |
| | | -33 | | | | | | | |
| | | -80 | | | | | | | |
| | | -30 | | | | | | | |
| | | -68 | | | | | | | |
| | | -80 | — | — | | | | | |
| | | -68 | | | | | | | |
| | | -24 | | | | | | | |
| | | -68 | | | | | | | |
| | | -33 | | | | | | | |
| | | -56 | | | | | | | |
| | | | | | | | | | |
| | | Input Resistor Tolerance | ΔR ₁ | -30 | | | — | +30 | % |
| Resistance Ratio Tolerance | ΔR ₂ /R ₁ | -20 | — | +20 | % | — | | | |
| Gain-Bandwidth Product* | f _T | — | 250 | — | MHz | V _{CE} = -10V, I _E = 5mA, f = 100MHz | | | |

* Transistor - For Reference Only

Typical Curves – DDTA123JKA

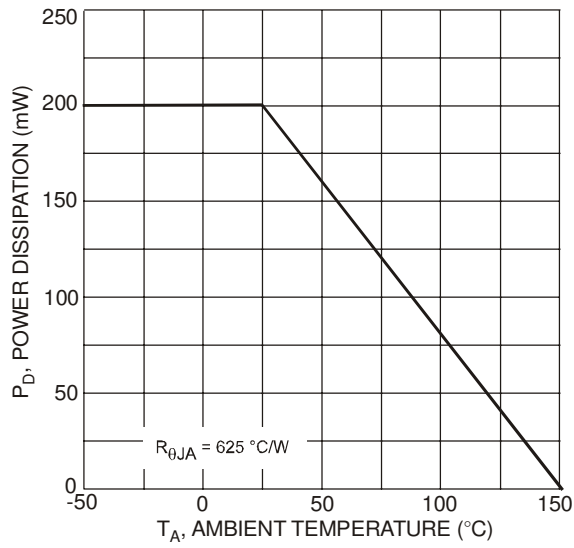


Fig. 1 Derating Curve

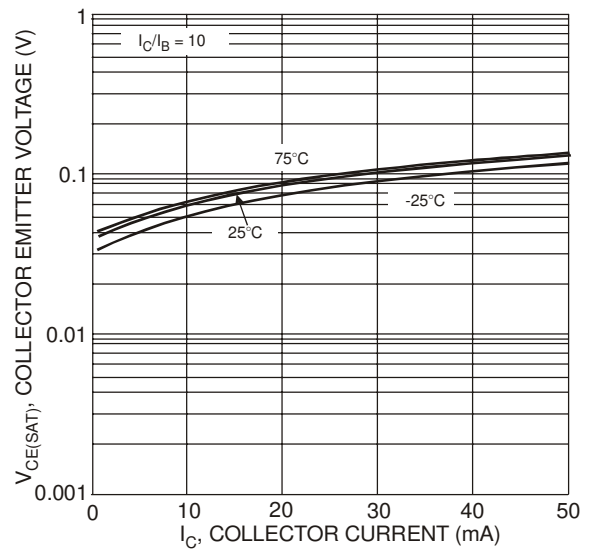


Fig. 2 $V_{CE(SAT)}$ vs. I_C

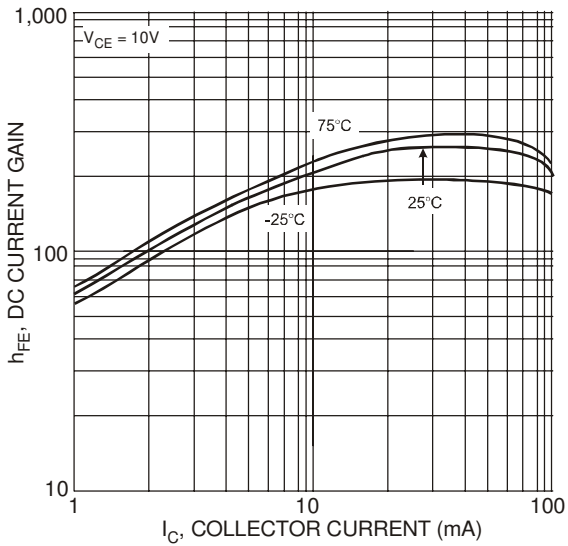


Fig. 3 DC Current Gain

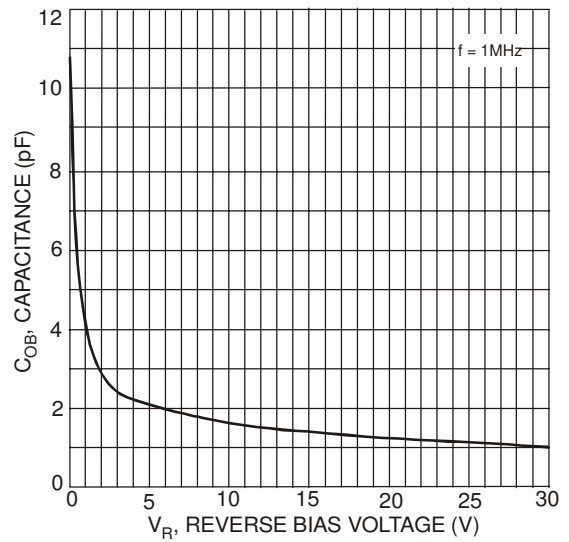


Fig. 4 Output Capacitance

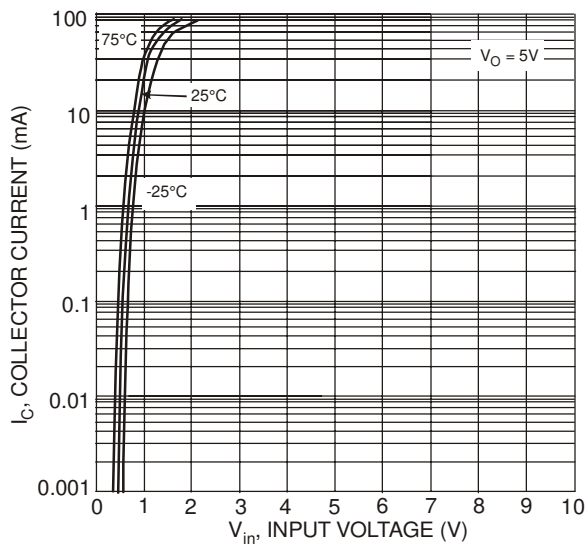


Fig. 5 Collector Current vs. Input Voltage

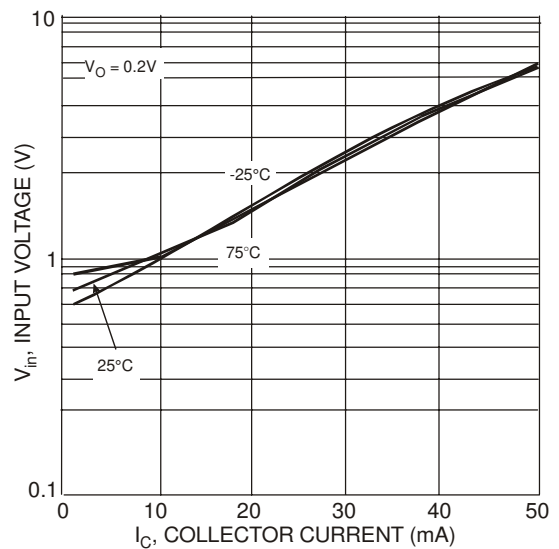



Fig. 6 Input Voltage vs. Collector Current

Ordering Information (Note 3 & 5)

| Device | Packaging | Shipping |
|----------------|-----------|------------------|
| DDTA113ZKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA123YKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA123JKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA143XKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA143FKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA143ZKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA114YKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA114WKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA124XKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA144VKA-7-F | SC-59 | 3000/Tape & Reel |
| DDTA144WKA-7-F | SC-59 | 3000/Tape & Reel |

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



PXX = Product Type Marking Code, See Table on Page 1
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.