

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Multilayer Band Pass Filters, DEA Series


FUNCTIONS

GND In(Out)


GND Out(In)

DEA202450BT-1195A1

SHAPES AND DIMENSIONS



RECOMMENDED PC BOARD PATTERN



Solder resist Land

Line width be designed to mach 50Ω characteristic impedance depending on PCB material and thickness


Dimensions in mm

ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
Center frequency	[2450MHz]				
Insertion loss	[2400 to 2500MHz]	(dB)	_	_	2.3
Return loss	[2400 to 2500MHz]	(dB)	9	_	_
Attenuation	[880 to 915MHz]	(dB)	40	_	_
	[915 to 1250MHz]	(dB)	30	_	_
	[1710 to 1990MHz]	(dB)	23	_	_
	[1990 to 2100MHz]	(dB)	10	_	_
	[4800 to 5000MHz]	(dB)	25	_	_
	[7200 to 7500MHz]	(dB)	13	_	_
Temperature range	Operating	(°C)	-40	_	+85
	Storage	(°C)	-40	_	+85

[•] Ta:+25°C

FREQUENCY CHARACTERISTICS

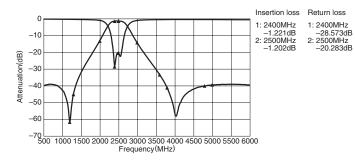

Insertion loss Return loss Attenuation loss

Attenuation los
1: 1200MHz
3 -61.487dB
2: 1300MHz
1-41.918dB
3: 2000MHz
-13.083dB
4: 3000MHz
-14.092dB
5: 3600MHz
-33.109dB
6: 3800MHz
-40.9dB
7: 4800MHz
-39.925dB
8: 5000MHz
-39.466dB

-39.346dB

[•] All specifications are subject to change without notice.