

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









June 2015

Multilayer Band Pass Filter (Balance Output Type)
For 2400-2500MHz

# DEA202450BT-7077A1

2.0x1.25mm [EIA 0805]\*

\* Dimensions Code JIS[EIA]




# Multilayer Band Pass Filter (Balance Output Type) For 2400-2500MHz

**Conformity to RoHS Directive** 

# **DEA202450BT-7077A1**


#### SHAPES AND DIMENSIONS

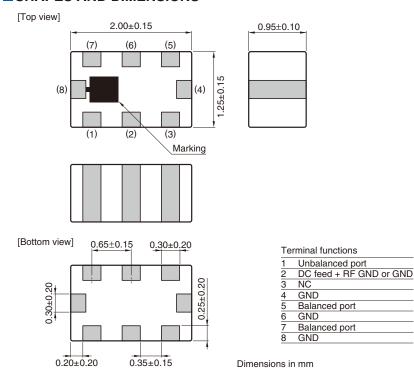

#### ■ RECOMMENDED LAND PATTERN

## 0.35 0.35 0.00 0.55 0.65 0.65 0.65 0.65 0.65

#### **EVALUATION BOARD**

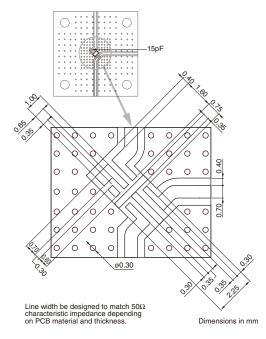

OROHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

<sup>•</sup> All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.



# DEA202450BT-7077A1

### **ELECTRICAL CHARACTERISTICS**

| Item   | Frequency Range<br>(MHz) | Min.       | Тур.             | Max.               |
|--|--------------------------|------------|------------------|--------------------|
| Unbalanced Port Characteristic Impedance (Ω) |                          |            | 50 (Nominal)     |                    |
| Balanced Port Characteristic Impedance (Ω)   |                          |            | 34+j72 (Nominal) |                    |
| Insertion Loss (dB)                          | 2400 to 2500             | _          | _                | 3.5                |
| Insertion Loss (ub)                          | 2400 to 2500             | _          | _                | 3.8 (-40 to +85°C) |
|  | 880 to 960               | 40         | _                | _                  |
|  | 1710 to 1880             | 38         | _                | _                  |
| Attanuation (dD)                             | 1880 to 1990             | 38         | _                | _                  |
| Attenuation (dB)                             | 2110 to 2170             | 17         | _                | _                  |
|  | 4800 to 5000             | 25         | _                | _                  |
|  | 7200 to 7500             | 27         | _                | _                  |
| Return Loss at Unbalanced Port (dB)          | 2400 to 2500             | 9          | _                | _                  |
| Return Loss at Balanced Port (dB)            | 2400 to 2500             | 9          | _                | _                  |
| Phase Balance (deg.)                         | 2400 to 2500             | 170        | _                | 190                |
| Amplitude Balance (dB)                       | 2400 to 2500             | <b>–</b> 1 | _                | 1                  |

<sup>·</sup> Ta: +25±5°C

#### **■TEMPERATURE RANGE**

| Operating temperature | Storage temperature |  |  |
|-----------------------|---------------------|--|--|
| (°C)                  | (°C)                |  |  |
| -40 to +85            | -40 to +85          |  |  |


All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.




## DEA202450BT-7077A1

#### FREQUENCY CHARACTERISTICS


#### **□SDS21 INSERTION LOSS**

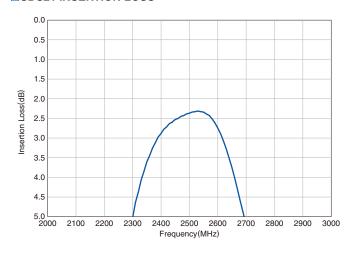


#### **□SDS21 ATTENUATION**

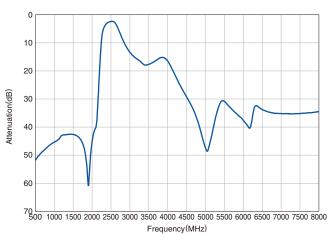


#### **□SSS11 RETURN LOSS at UNBALANCE PORT**

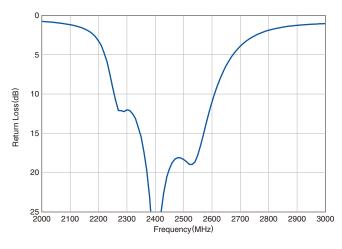


#### **□SDD22 RETURN LOSS at BALANCE PORT**

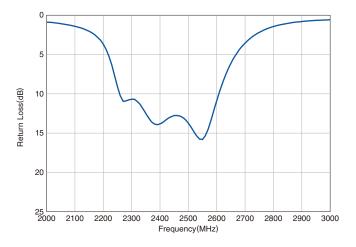

#### □PHASE BALANCE

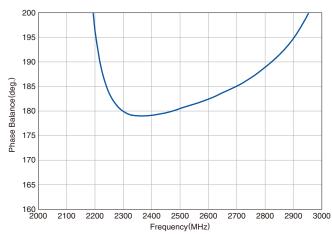

#### □AMPLITUDE BALANCE

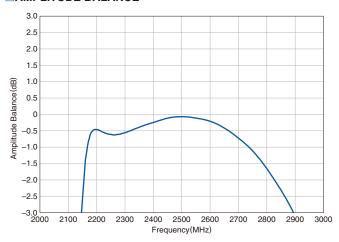


<sup>•</sup> All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.



# DEA202450BT-7077A1

### ■ RECOMMENDED REFLOW PROFILE

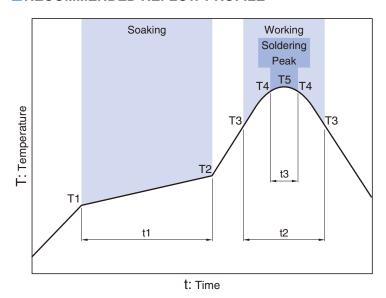

| Soaking |       |            | Working |               | Soldering Peak | Soldering Peak |            |
|---------|-------|------------|---------|---------------|----------------|----------------|------------|
| Temp.   |       | Time       | Temp.   | Time          | Temp.          | Time           | Temp.      |
| T1      | T2    | t1         | Т3      | t2            | T4             | t3             | T5         |
| 150°C   | 180°C | 60 to 120s | 230°C   | more than 30s | 247 to 253°C   | within 10s     | 260°C max. |

All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

## SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

## **⚠** REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.