



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





PART OBSOLETE - EOL18

DF SERIES

1A Single Phase D.I.L. Rectifier Bridge

Features


- Glass passivated chips
- Leads on standard 0.1" grid
- Suitable for automatic insertion
- High surge current capability
- Fully characterised data
- Wide temperature range
- Surface mount option
- Lead free terminals solderable as per MIL-STD-750 Method 2026
- High temperature soldering guaranteed 260°C/8-10 secs
- Polarity symbols marked on the case
- UL E160375 approved 



$$I_{O(av)} = 1.0 \text{ A}$$

$$V_{RRM} \text{ range}$$

$$50 \text{ to } 1000 \text{ V}$$



Description

The DF Series of Single Phase Rectifier Bridges consists of four silicon junctions encapsulated in a 4 pin D.I.L. package. These devices are intended for general use in industrial and consumer equipment.

Electrical Specification

| | | DF... | Units | Conditions |
|---------------|--|------------|-----------------------------|--|
| I_O | Maximum DC output current | 1.0 | A | $T_{amb} = 40^\circ\text{C}$, Resistive or inductive load |
| | | 0.8 | A | $T_{amb} = 40^\circ\text{C}$, Capacitive load |
| I_{FSM} | Maximum peak one cycle, non-repetitive surge current | 30 | A | $t = 10\text{ms}, 20\text{ms}$ |
| | | 31 | A | $t = 8.3\text{ms}, 16.7\text{ms}$ |
| I^2t | Maximum I^2t capability for fusing | 4.5 | A^2s | $t = 10\text{ms}$ |
| | | 4.1 | A^2s | $t = 8.3\text{ms}$ |
| | | 6.4 | A^2s | $t = 10\text{ms}$ |
| | | 5.8 | A^2s | $t = 8.3\text{ms}$ |
| $I^2\sqrt{t}$ | Maximum $I^2\sqrt{t}$ capability for fusing | 64 | $\text{A}^2\sqrt{\text{s}}$ | $t = 0.1 \text{ to } 10\text{ms}$, no voltage reapplied |
| V_{FM} | Maximum peak forward voltage per diode | 1.0 | V | $I_{FM} = 1.0\text{A}$, $T_J = 25^\circ\text{C}$ |
| I_{RM} | Typical peak reverse leakage per diode | 5 | μA | $T_J = 25^\circ\text{C}$, 100% V_{RRM} |
| | | 100 | μA | $T_J = 150^\circ\text{C}$, 100% V_{RRM} |
| f | Operating frequency range | 50 to 1000 | Hz | |
| V_{RRM} | Maximum repetitive peak reverse voltage range | 50 to 1000 | V | |

Thermal and Mechanical Specifications

| | | DF... | Units | Conditions |
|------------|--|-------------|------------------|------------|
| T_J | Operating and storage temperature range | - 55 to 150 | $^\circ\text{C}$ | |
| T_{stg} | Storage temperature range | | | |
| R_{thJA} | Thermal resistance, junctions to ambient | 60 | K/W | |
| W | Approximate weight | 0.6 (0.02) | g (oz) | |

Voltage Specifications

| Part Number | V_{RRM} . Maximum repetitive peak reverse voltage V | V_{RSM} . Maximum non-repetitive peak reverse voltage V |
|---------------|--|--|
| DF005M/DF005S | 50 | 80 |
| DF01M/DF01S | 100 | 150 |
| DF02M/DF02S | 200 | 300 |
| DF04M/DF04S | 400 | 500 |
| DF06M/DF06S | 600 | 700 |
| DF08M/DF08S | 800 | 900 |
| DF10M/DF10S | 1000 | 1100 |

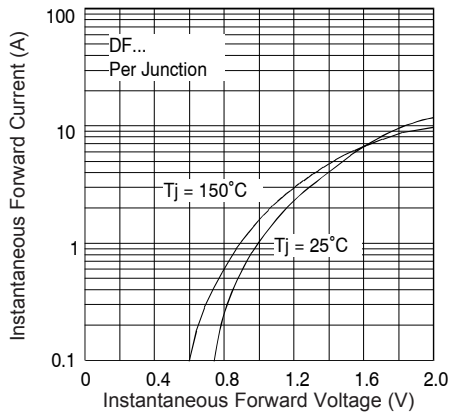


Fig. 1 - Forward Characteristics

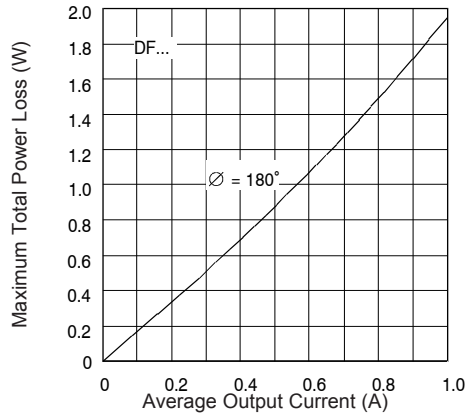


Fig. 2 - Power Loss Characteristics

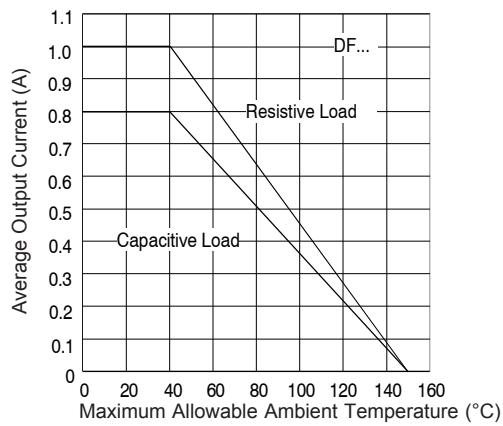


Fig. 3 - Current Ratings


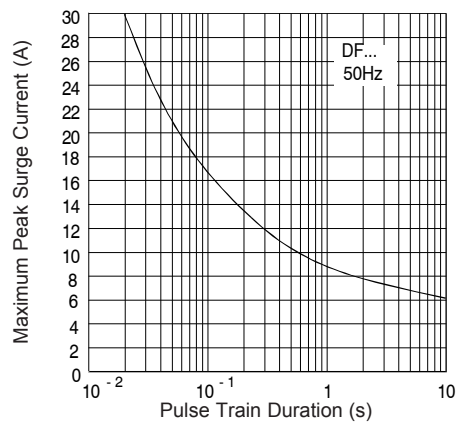


Fig. 4 - Non-Repetitive Surge Ratings



DF..M

DF..S

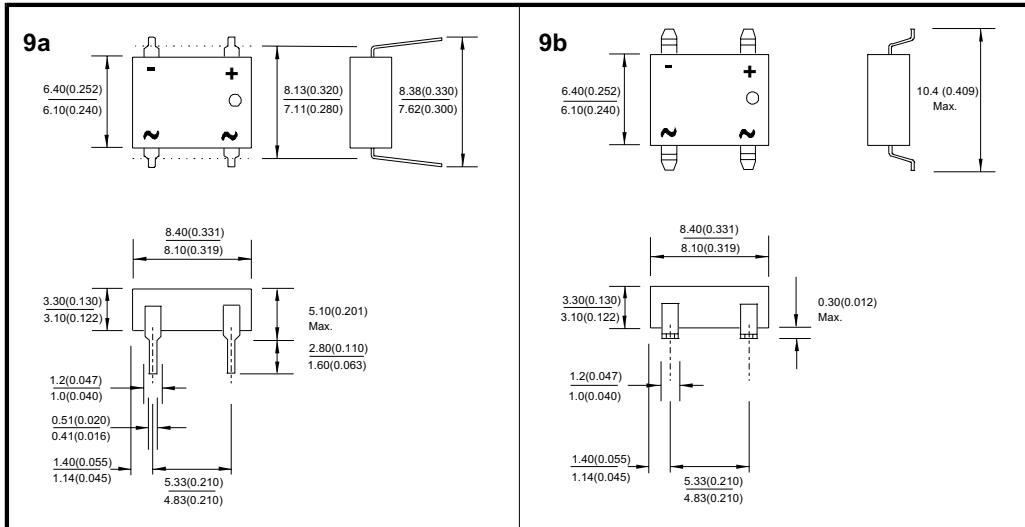


Tape Reel

Tape Reel Dimensions for DF15...TRR16

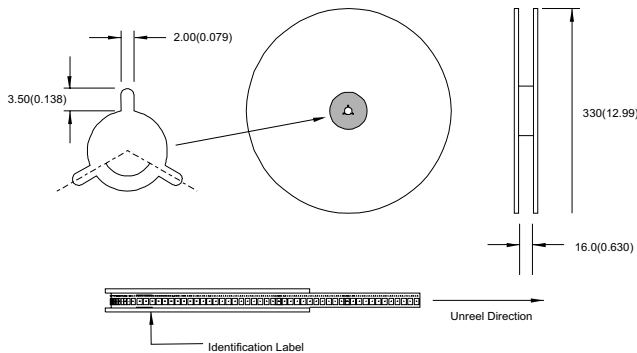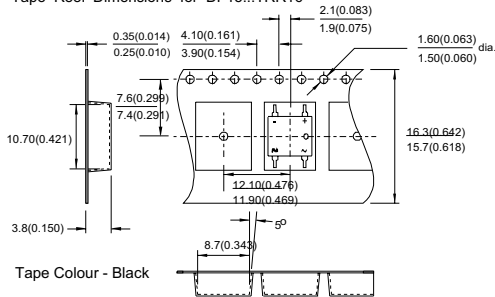

Footprint and Pad Dimensions



All dimensions in millimetres(inches)

DF SERIES

Bulletin U2788 rev. G 04/03

International
IOR Rectifier

Ordering Information Table

| | |
|-------------|------|
| Device Code | |
| DF | 10 S |
| ① | ② ③ |

| | |
|----------|--|
| 1 | - Basic Part Number |
| 2 | - Voltage Code: Code x 100 = V_{RRM} |
| 3 | - Terminal Type: M = hole mount S = surface mount |

To specify tape reel option add ' TRR16' suffix. e.g. DF10STRR16

Data and specifications subject to change without notice.
This product has been designed and qualified for Multiple Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 04/03