imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Effective August 2016 Supersedes December 2015

BUSSMANN SERIES

DFJ Class J high speed fuses



Catalog symbol:

· DFJ-_

Description:

The Bussmann[™] series DFJ drive fuse is a high speed, current-limiting fuse that provides maximum protection for AC and DC drives and controllers and meet NEC[®] branch circuit protection requirements. The drive fuse has the lowest l²t of any branch circuit fuse to protect power semiconductor devices that utilize diodes, GTOs, SCRs and SSRs.

Specifications:

Ratings

- · Volts
 - 600Vac (or less)
 - 450Vdc (or less, 15-600A)
 - Amps 1-600A
- · IR
 - 200kA RMS Sym.
 - 100kA DC

FATON Powering Business Worldwide

Agency information

- UL[®] Listed Standard 248-8, Class J, Guide JDDZ, File E4273
- CSA[®] Certified, C22.2 No. 248.8, Class 1422-02, File 53787
- · RoHS compliant
- CE

Features:

- Easily coordinated with existing and new variable speed drives and electric controllers.
- Standard Class J dimensions allow using readily available fuse blocks, holders and switches.
- Has the lowest let-through energy of any branch circuit overcurrent protective device.

Typical applications

- · Protection of AC and DC drives
- Equipment using power semiconductor devices

Catalog numbers (amps):					
DFJ-1	DFJ-15	DFJ-60	DFJ-200		
DFJ-2	DFJ-17.5	DFJ-70	DFJ-225		
DFJ-3	DFJ-20	DFJ-80	DFJ-250		
DFJ-4	DFJ-25	DFJ-90	DFJ-300		
DFJ-5	DFJ-30	DFJ-100	DFJ-350		
DFJ-6	DFJ-35	DFJ-110	DFJ-400		
DFJ-8	DFJ-40	DFJ-125	DFJ-450		
DFJ-10	DFJ-45	DFJ-150	DFJ-500		
DFJ-12	DFJ-50	DFJ-175	DFJ-600		

Carton quantity:

Amp rating	Carton qty.
1–60	10
70–200	5
225–600	1


< 2.38″≻

~ 0.63[″] 1.06″


Electrical characteristics:

Catalog		I ² t (A ² Sec) @ 600Vac/100kA		Watts
number	Amps	Pre-arc	Clearing	loss
DFJ-15	15	4	110	4.1
DFJ-20	20	8	365	4.0
DFJ-25	25	12	610	4.9
DFJ-30	30	20	1000	5.5
DFJ-35	35	55	1100	6.8
DFJ-40	40	90	1900	8.6
DFJ-50	50	140	2800	8.7
DFJ-60	60	290	6000	8.5
DFJ-70	70	450	3100	12
DFJ-80	80	650	4600	13
DFJ-90	90	1010	7200	13
DFJ-100	100	1460	10,500	13
DFJ-110	110	1710	9500	17
DFJ-125	125	3580	20,000	15
DFJ-150	150	5080	28,000	19
DFJ-175	175	6310	35,000	23
DFJ-200	200	9850	54,500	24
DFJ-225	225	11,420	51,000	29
DFJ-250	250	17,000	74,500	30
DFJ-300	300	23,500	103,000	36
DFJ-350	350	38,800	170,000	39
DFJ-400	400	62,200	272,000	40
DFJ-450	450	44,600	270,000	56
DFJ-500	500	79,500	480,000	52
DFJ-600	600	138,000	830,000	57


Dimensions - in:













Recommended fuse blocks and holders:


Fuse						
amps	1-Pole	2-Pole	3-Pole			
"Pyramid" blocks (data sheet No. 1108)						
up to 30	_	-	JP60030-3_			
CH holders (data sheet No. 2144)						
up to 30	CH30J1_ CH30J2_		CH30J3_			
35-60	CH60J1_	CH60J2_	CH60J3_			
Safety J [™] holders (data sheet No. 1152)						
up to 30	JT60030_	_	-			
35-60	JT60060_	-	_			
JM modular fuse blocks (data sheet No. 3192 and 10289)						
up to 30	JM60030-1_	JM60030-2_	JM60030-2_			
35-60	JM60060-1CR	JM60060-2CR	JM60060-3CR			
70-100	JM60100-1CR	JM60100-2CR	JM60100-3CR			
110-200	JM60200-1CR	JM60200-2CR	JM60200-3CR			
225-400	JM60400-1CR	JM60400-2CR	JM60400-3CR			
450-600	JM60600-1CR	JM60600-2CR	JM60100-3CR			
JM power distribution fuse blocks (data sheet No. 10192)						
up to 30	JM60030-1MW_	JM60030-2MW_	JM60030-3MW_			
35-60	JM60060-1MW_	JM60060-2MW_	JM60060-3MW_			
70-100	JM60100-1MW14	JM60100-2MW14	JM60100-3MW14			
110-200	JM60200-1MW16	JM60200-2MW16	JM60200-3MW16			
225-400	JM60400-1MW16	JM60400-2MW16	JM60400-3MW16			
	JM60400-1MW26*	JM60400-2MW26*	JM60400-3MW26*			



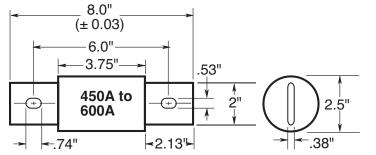


* Lineside dual box lug terminal.

Time-current curves - average melt

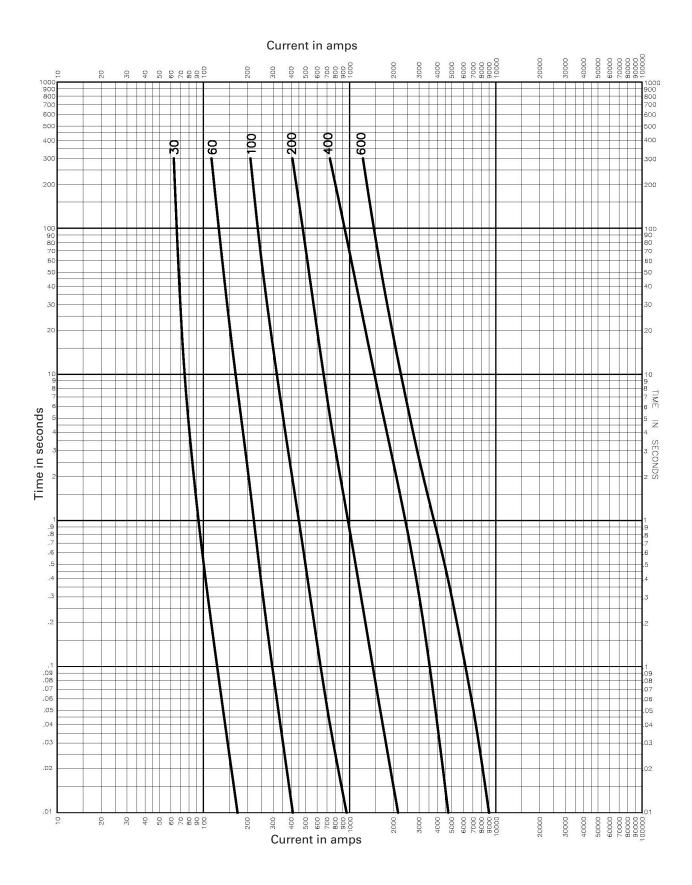

Current-limitation curves

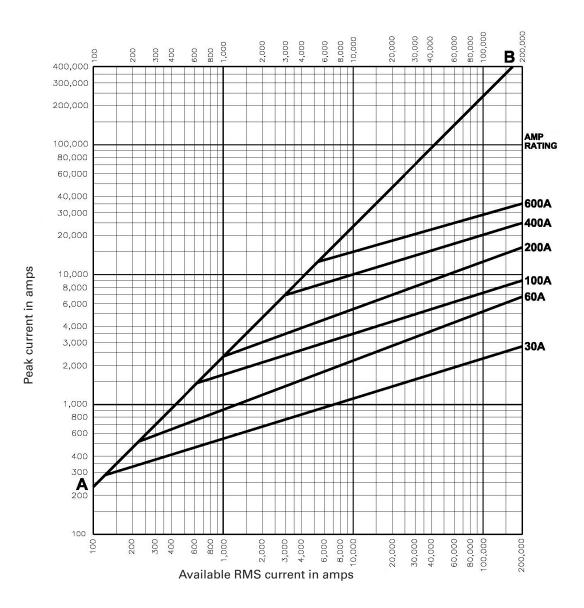

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

© 2016 Eaton All Rights Reserved Printed in USA Publication No. 1048 – BU-SB131065 August 2016 Eaton, Bussmann and Low-Peak are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group. NEC is a registered trademark of the National Fire Protection Association, Inc. UL is a registered trademark of the Underwriters Laboratories, Inc. For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**

Follow us on social media to get the latest product and support information.



