



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832




Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Gallium Arsenide Schottky Rectifier

$$\begin{aligned} I_{DC} &= 12 \text{ A} \\ V_{RRM} &= 250 \text{ V} \\ C_{Junction} &= 18 \text{ pF} \end{aligned}$$

Type	Marking on product		Circuit	Package	
A = Anode, C = Cathode, TAB = Cathode					
DGS 9-025AS	9A250AS	Single		TO-252 AA	
DGS 10-025A DGS 10-025AS	DGS 10-025A DGS 10-025AS	Single		TO-220 AC TO-263 AB	
DGSK20-025A DGSK20-025AS	DGSK20-025A DGSK20-025AS	Common cathode		TO-220 AB TO-263 AB	

Symbol	Conditions	Maximum Ratings	
$V_{RRM/RSM}$		250	V
I_{FAV}	$T_C = 25^\circ\text{C}; \text{DC}$	12	A
I_{FAV}	$T_C = 90^\circ\text{C}; \text{DC}$	9	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}; t_p = 10 \text{ ms (50 Hz), sine}$	20	A
T_{VJ}		-55...+175	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	34	W
M_d	mounting torque (TO-220)	0.4...0.6	Nm

Features

- Low forward voltage
- Very high switching speed
- Low junction capacity of GaAs
- low reverse current peak at turn off
- Soft turn off
- Temperature independent switching behaviour
- High temperature operation capability
- Epoxy meets UL 94V-0

Applications

- MHz switched mode power supplies (SMPs)
- Small size SMPs
- High frequency converters
- Resonant converters

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$V_R = V_{RRM}; T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}; T_{VJ} = 125^\circ\text{C}$	1.3	1.3 mA mA
V_F	$I_F = 5 \text{ A}; T_{VJ} = 125^\circ\text{C}$ $I_F = 5 \text{ A}; T_{VJ} = 25^\circ\text{C}$	1.3 1.2	V V
C_J	$V_R = 100 \text{ V}; T_{VJ} = 125^\circ\text{C}$	18	pF
R_{thJC}			4.4 K/W
R_{thCH}	TO-220	0.5	K/W
Weight	TO-252 TO-220/263	0.3 2	g g

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %

Data according to IEC 60747 and per diode
unless otherwise specified

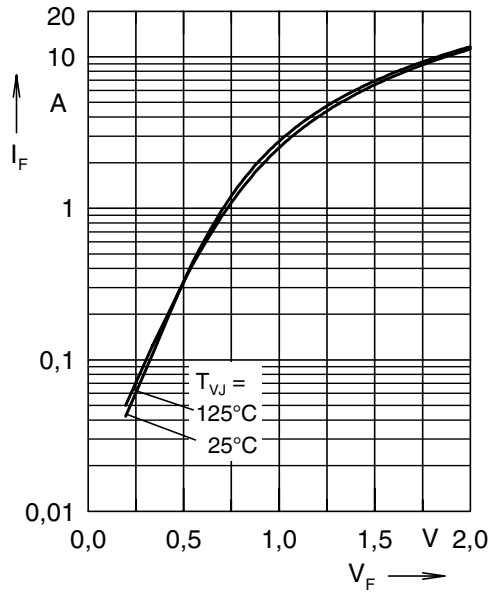


Fig. 1 typ. forward characteristics

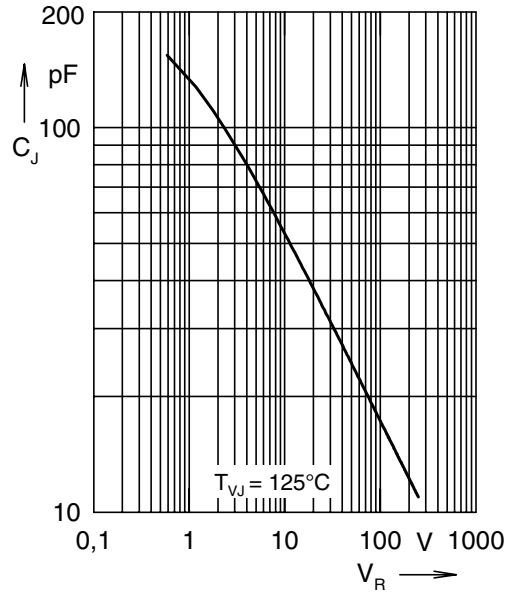


Fig. 2 typ. junction capacity
versus blocking voltage


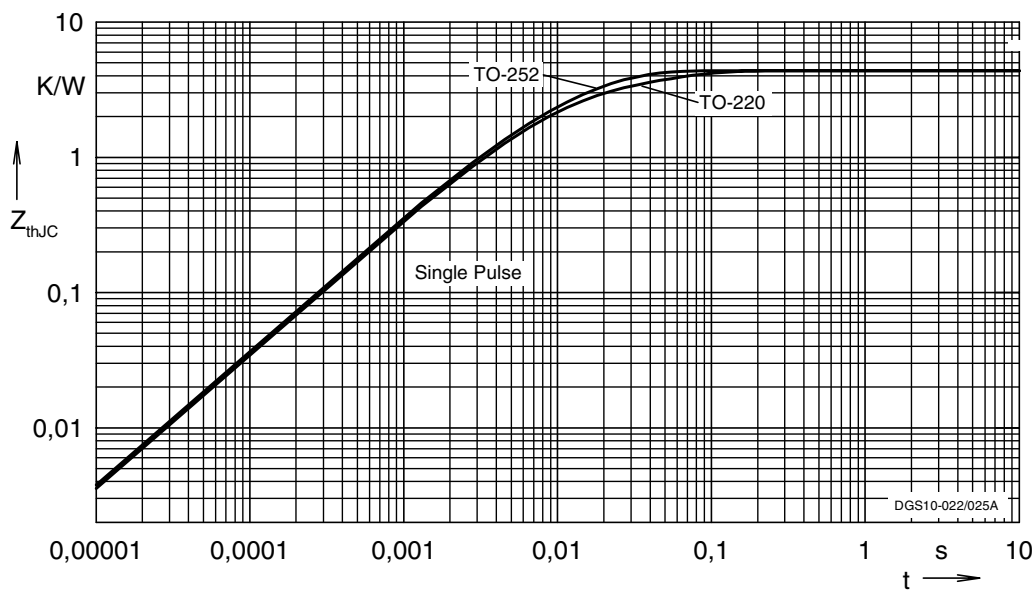


Fig. 3 typ. thermal impedance junction to case

Note:
explanatory comparison of the basic operational behaviour of rectifier diodes and Gallium Arsenide Schottky diodes:


	Rectifier Diode	GaAs Schottky Diode
conduction	by majority + minority carriers	by majority carriers only
forward characteristics	$V_F(I_F)$	$V_F(I_F)$, see Fig. 1
turn off characteristics	extraction of excess carriers causes temperature dependant reverse recovery (t_{rr} , I_{RM} , Q_{rr})	reverse current charges junction capacity C_J , see Fig. 2; not temperature dependant
turn on characteristics	delayed saturation leads to V_{FR}	no turn on overvoltage peak

Outlines TO-220

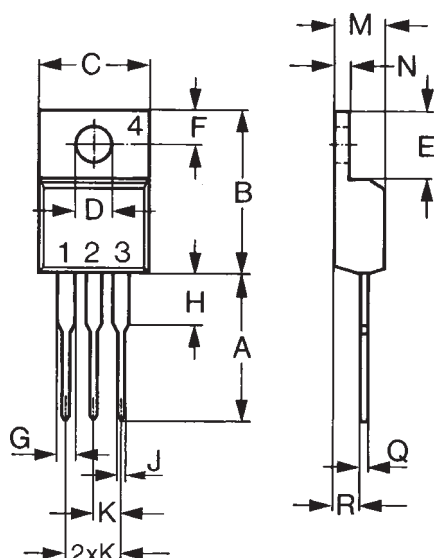


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	12.70	13.97	0.500	0.550
B	14.73	16.00	0.580	0.630
C	9.91	10.66	0.390	0.420
D	3.54	4.08	0.139	0.161
E	5.85	6.85	0.230	0.270
F	2.54	3.18	0.100	0.125
G	1.15	1.65	0.045	0.065
H	2.79	5.84	0.110	0.230
J	0.64	1.01	0.025	0.040
K	2.54	BSC	0.100	BSC
M	4.32	4.82	0.170	0.190
N	1.14	1.39	0.045	0.055
Q	0.38	0.56	0.015	0.022
R	2.29	2.79	0.090	0.110

Outlines TO-252

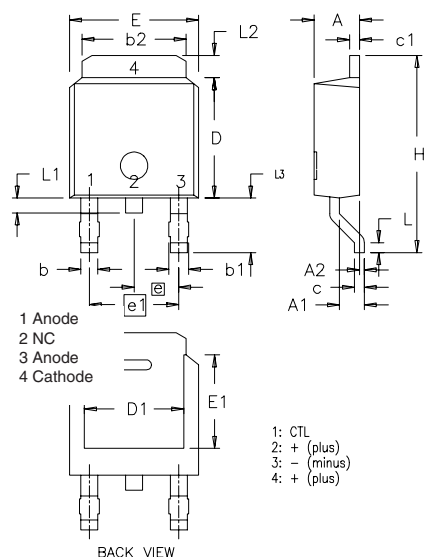

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.19	2.38	0.086	0.094
A1	0.89	1.14	0.035	0.045
A2	0	0.13	0	0.005
b	0.64	0.89	0.025	0.035
b1	0.76	1.14	0.030	0.045
b2	5.21	5.46	0.205	0.215
c	0.46	0.58	0.018	0.023
c1	0.46	0.58	0.018	0.023
D	5.97	6.22	0.235	0.245
D1	4.32	5.21	0.170	0.205
E	6.35	6.73	0.250	0.265
E1	4.32	5.21	0.170	0.205
e	2.28 BSC		0.090 BSC	
e1	4.57 BSC		0.180 BSC	
H	9.40	10.42	0.370	0.410
L	0.51	1.02	0.020	0.040
L1	0.64	1.02	0.025	0.040
L2	0.89	1.27	0.035	0.050
L3	2.54	2.92	0.100	0.115

Outline TO-263

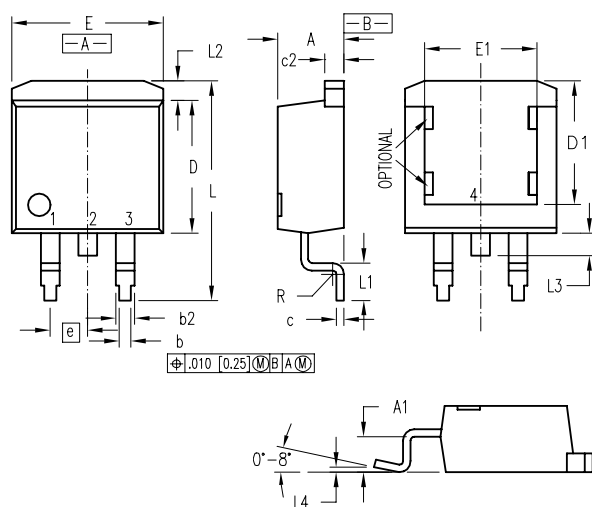

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.06	4.83	.160	.190
A1	2.03	2.79	.080	.110
b	0.51	0.99	.020	.039
b2	1.14	1.40	.045	.055
c	0.46	0.74	.018	.029
c2	1.14	1.40	.045	.055
D	8.64	9.65	.340	.380
D1	8.00	8.89	.315	.350
E	9.65	10.29	.380	.405
E1	6.22	8.13	.245	.320
e	2.54 BSC		.100 BSC	
L	14.61	15.88	.575	.625
L1	2.29	2.79	.090	.110
L2	1.02	1.40	.040	.055
L3	1.27	1.78	.050	.070
L4	0	0.20	0	.008
R	0.46	0.74	.018	.029

IXYS reserves the right to change limits, test conditions and dimensions

© 2004 IXYS All rights reserved