



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






- Features :
- 2:1 wide input range
- 4:1 wide input range(optionl)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% burn-in test
- Low cost / High reliability
- Approvals: FCC / CE
- 2 years warranty



SPECIFICATION

ORDER NO.	DKE15A-05	DKE15B-05	DKE15C-05	DKE15A-12	DKE15B-12	DKE15C-12	DKE15A-15	DKE15B-15	DKE15C-15	DKE15A-24	DKE15B-24	DKE15C-24			
OUTPUT	DC VOLTAGE			±5V			±12V			±15V			±24V		
	CURRENT RANGE			±150 ~ ±1500mA			±62.5 ~ ±625mA			±50 ~ ±500mA			±31.3 ~ ±313mA		
	RATED POWER			15W											
	RIPPLE & NOISE (max.) Note.2			50mVp-p			60mVp-p			60mVp-p			80mVp-p		
	LINE REGULATION Note.3			±0.3%											
	LOAD REGULATION Note.4			±0.5%											
	VOLTAGE ACCURACY			±2.0%											
	SWITCHING FREQUENCY			150KHz min.											
INPUT	VOLTAGE RANGE			A: 9 ~ 18VDC B: 18~36VDC C: 36~72VDC											
	EFFICIENCY (Typ.)			81%	83%	79%	82%	83%	82%	82%	83%	82%	82%	84%	85%
	DC CURRENT			Full load A: 1700mA B: 800mA C: 400mA											
				No load A: 40mA B: 20mA C: 10mA											
	FILTER			Pi network											
PROTECTION			Fuse recommended												
PROTECTION (Note. 5)	OVER CURRENT			160% ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed											
	SHORT CIRCUIT			All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed											
ENVIRONMENT	WORKING TEMP.			-25~+71°C (Refer to "Derating Curve")											
	WORKING HUMIDITY			20% ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY			-25 ~ +105°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT			±0.03% / °C (0 ~ 50°C)											
	VIBRATION			10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes											
SAFETY & EMC	SAFETY STANDARDS			EAC TP TC 004 approved											
	WITHSTAND VOLTAGE			I/P-O/P:1KVDC											
	ISOLATION RESISTANCE			I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH											
	EMC EMISSION			Compliance to EN55032 Class A, FCC part 15 Class A, EAC TP TC 020											
	EMC IMMUNITY			Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A, EAC TP TC 020											
OTHERS	MTBF			300Khrs min. MIL-HDBK-217F (25°C)											
	DIMENSION			50.8*50.8*11.0mm or 2**2**0.43" inch (L*W*H)											
	WEIGHT			65g											


Mechanical Specification

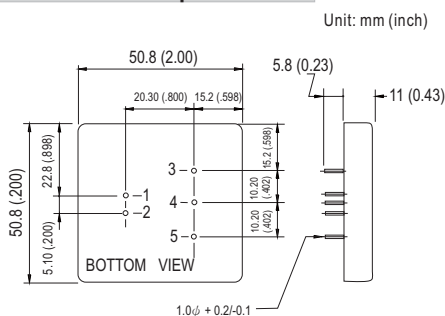

Pin Configuration

Pin No.	Output
1	+Vin
2	-Vin
3	+Vout
4	COM
5	-Vout

Derating Curve

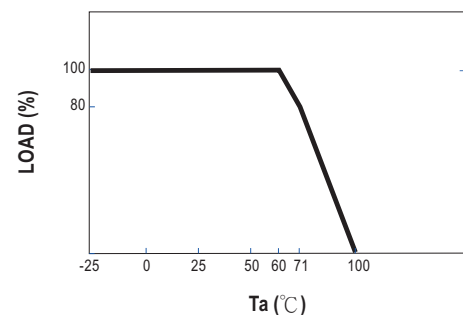

NOTE

1. All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 10% to 100% rated load.
5. Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.