mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




CnC Tech, LLC

DL-801 SERIES RATCHET CRIMPING TOOL

Specification:

• Item No:

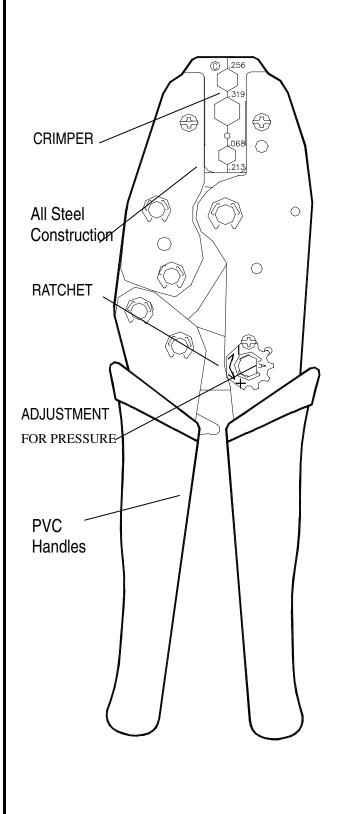

DL-	$ \bigcirc $	$\geq \bigcirc$	\bigcirc	\bigcirc	0	SQ. PIN	FOR CRI	IPING RG TYPE CABLE
801A	.25)mm 5.41mr	n	-	.068 1.72m	m	58,59,62	,140 BELDEN 8279
801AC	.324".25 8.22mm 6.48	5".213" 3mm 5.41 mr	n ź	.100" 2.54mm	.068 1.72m		58,59,62	,6,140 BELDEN 8279
801B	.319" 8.10mm	.213"	.187" n 4.75mm				58,6,174	,140 FIBER OPTIC
801C	.319".25 8.10mm 6.50	6" .213"			.068 1.72m		58,59,62	,6 BELDEN 8279
801C2	360".32 9.14mm8.22	4 [*] .262 [*] 2mm 6.65mr	n		.068 1.72m		CATV "F	' Connectors RG59,6
801D	.326" 8.30mm	.138" 3.50mr					6,174	
801D2	1008 01	6" .213"			.068 1.72m		8,9,11,58	3,59,62
801F	.350".32 8.90mm8.1	0 [*] .255 [*] 5mm 6.48mr	n				CATV F	CONN. RG59,6
801F2	1 1	.213	.178 * n 4.52mm 3	.151" 5.84mm	.068 1.72m		58,174,F	IBER OPTIC, SMA, SMB
801F5	.21	3" .178" Imm 4.52mr	.128* n 3.25mm	.068" .72mm	.042 1.07m	.028" m0.71mm	58,174,S	MA,SMB
801G	.25	5" .213" 3mm5 41mr	.137" n 3 50mm 2	.100" 54mm	.068 1.72m	.043" m1 10mm		,140,174 FIBER OPTIC
8011	.311 .2 7.90mm 6.48	5" .213" 3mm 5.41 mr	n	.093 	.068 1.79m	m	58,59,6,0	62,174
801J	.17	'8" .151" 2mm 3.84mr		.078" .00mm	.068 1.72m		174,178,	179 FIBER OPTIC
801K	.429" 10.9mm		.128" 3.25mm/	.100" .54mm	.075 1.90m	m	8,9,11,1	74,316,BELDEN9913
801L	.385" .32 9.78mm8.13	5mm 6.35mr	.211" n5.36mm				NCONN.6	,58,59
801M		3 ^{**} .178 ^{**}	n	.068* .72mm	.065 1.65m		58,59,17	4
801T	.1;	51".128" 4mm 3.25mr	1.100	.047*	.039	· .028*	174,SMA	SMB,FIBER OPTIC
801V	.187" .17 4.75mm 4.52	'8" .151"	1.137	128	.068	' .042"	58,174,S	MA,SMB
801V1	70/8 07	6".217")mm5.51mr	.178 * n 4.52mm		.068		58,59,6,	174
230A	6.48	i5" .213" Bmm 5.41mr	1.187		.068 1.72m	•	58,59,62	,142,174,223
830B	.324" .25 8.22mm 6.48	5"			.068 1.72m	'	59,62,6	BELDEN 8281
830D	.21			.128 .25mm			58,174,F	iber optic
DL-		A.W.C			100	m² (E		
301	00.40	AWG	40.40		T			INSULATED
	22-18	16-14	12-10				4.0-6.0	TERMINAL INSULATED
301H		16-14	12-10				4.0-6.0	TERMINAL CORD END
301E	22-20	18-16	14-12		_		2.5-4.0	PIN TERMINAL CORD END
3015	10	8	6	6		10	16	PIN TERMINAL INTER-LOCKING
2300	20-18	16-14	12-10	0.5-			4.0-6.0	CONNECTOR CORD END
530B	22-14	12-10	8-6	0.5-3		4.0-6.0		PIN TERMINAL NON-INSULATED
530N		14-12	10-8	1.5-	_	4.0-6.0		TERMINAL CORD END
530S	6	4	2	1	6	25	35	PIN TERMINAL
Lengt								arbon Ste
		_						

Crimper-Made Of Off Wax

* Hardness: HRC 42-48

* Finished: Black oxide finished.