



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



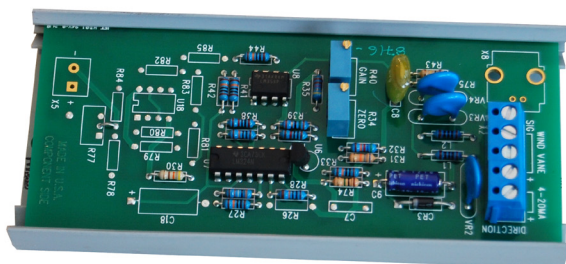

Track Mounted Transmitter

DESCRIPTION & FEATURES

The DLT converts the output of a precision potentiometric wind vane to a 4-20 mA signal. The DLT wind vane is molded from UV stabilized black Lexan. The 4-20 mA transmitter board is track mounted and powered by the milliamp loop. The wind direction range is 0-360 degrees over the 4-20 mA output with an 5 degree dead band centered on North.



Wind Vane

ORDERING INFO

PART NUMBER

DLT Wind Direction Vane with 60', 3 conductor cable, 4-20 mA Transmitter, and 1/2" Conduit S Mast

ACCESSORIES

SDUM U-Mount Assembly
 SA4P Pole mount 4 wire Surge/Lightning Arrestor
 SA4W Wall mount 4 wire Surge/Lightning Arrestor
 DK191 Loop Powered Display Series
 DK190F Loop Powered Display
 DK807/907 Loop Powered Display Series
 BDR-924/999 4-20 mA Controlled Display Series
 PW1.0 Power Supply
 PW1.5 Power Supply
 PW2-24 Power Supply
 CVC 4-20 mA Calibrator

SPECIFICATIONS

Range: 0-360 degrees = 4-20 mA output
 Accuracy: +/-4 degrees
 Transmitter Dimensions: Track Mount 2.5"W x 5.25"L x 1.5"H
 Wind Vane Dimensions: 4.5"H x 8"L
 Wind Vane Sweep Diameter: 10.25"
 Shipping Weight: 3 lbs.
 Operating Temperature: Electronics 0 to 60° C
 Sensor -55 to 60° C
 Transmitter Connections: Screw terminals for 12AWG or smaller
 Transmitter Power: Powered by the 4-20 mA loop current
 Wind Vane Mounting: Vertical on a 1/2" conduit S mast (included)
 Accessories: Surge/Lightning Arrestors
 U-Mount Assembly

