



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**DESCRIPTION**

This series of Transient Voltage Suppressor (TVS) devices is packaged in a ceramic, dual-in-line, hermetically sealed package. These components offer 15 protective devices, unidirectional or bidirectional, common buss connections, per package. The dual-in-line is designed specifically for data line protection, at the PC board level. TTL and MOS voltage levels are available for protection of input/output data circuits. Microsemi also offers numerous other TVS products to meet higher and lower power demands and special applications.

**APPEARANCE**

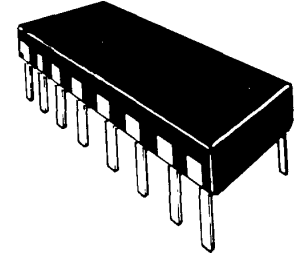

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

**FEATURES**

- Multiple TVS array
- Ceramic dual-in-line, 16 PIN hermetic package
- Common-buss configuration
- Optional 100% **screening for avionics grade** is available by adding MA prefix to part number for added 100% temperature cycle -55°C to +125°C (10X) as well as surge (3X) and 24 hours HTRB with post test  $V_Z$  &  $I_R$  (in the operating direction for unidirectional or both directions for bidirectional)
- Options for screening in accordance with MIL-PRF-19500 for JAN, JANTX, JANTXV, and JANS are also available by adding MQ, MX, MV, or MSP prefixes respectively to part numbers.

**APPLICATIONS / BENEFITS**

- Protects up to 15 lines
- Provides electrically isolated protection
- Unidirectional or Bidirectional selections
- Voltage range of 5 V to 30 V available
- Protects sensitive components such as IC's, CMOS, Bipolar, BiCMOS, ECL, DTL, T<sup>2</sup>L, etc.
- Protection from switching transients & induced RF
- Compliant to IEC61000-4-2 and IEC61000-4-4 for ESD and EFT protection respectively
- Inherently radiation hard as described in Microsemi MicroNote 050

**MAXIMUM RATINGS**

- 500 Watts Peak Pulse Power/Position @ 8x20  $\mu$ s (see figure 1 and 2)
- $t_{clamping}$  (0 volts to  $V_{(BR)}$  min.): < 100 ps theoretical for unidirectional and < 5 ns for bidirectional
- Operating and Storage temperatures: -55°C to +150°C.
- Forward Surge Rating: 10 Amps, 1/120 sec. @ 25°C (unidirectional)
- Repetition Rate (duty cycle): .01%

**MECHANICAL AND PACKAGING**

- CASE: Ceramic, 16 pin dual-in-line (.300" row spacing)
- POLARITY: Pin No. 1 marked with a flag on lead and a dot on top of package.
- MARKING: Body marked with part number
- WEIGHT: 3.5 grams (approximate)


**ELECTRICAL CHARACTERISTICS**

MICROSEMI PART NUMBER	REVERSE STAND-OFF VOLTAGE $V_{WM}$ VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1 mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE @ $I_{PP2} = 1A$ (8 X 20 $\mu s$ ) $V_{C1}$ VOLTS	MAXIMUM CLAMPING VOLTAGE @ $I_{PP2} = 10A$ (8 X 20 $\mu s$ ) $V_{C2}$ VOLTS	MAXIMUM REVERSE LEAKAGE @ $V_{WM}$ $I_D$ $\mu A$	MAXIMUM CAPACITANCE @ OV 1MHz C pF	MAXIMUM VOLTAGE TEMPERATURE VARIATION OF $V_{(BR)}$ mV/C
<b>Unidirectional</b>							
DLTS-5	5	6.0	10.2	12.5	200	880	5
DLTS-5A	5	6.0	9.5	10.6	200	880	5
DLTS-12	12	13.3	21.1	26.0	2	440	18
DLTS-12A	12	13.3	19.1	23.5	2	440	18
DLTS-17	17	19.2	30.4	37.4	2	330	20
DLTS-17A	17	19.2	27.5	33.9	2	330	20
DLTS-24	24	26.7	42.3	52.1	2	275	31
DLTS-24A	24	26.7	38.3	47.2	2	275	31
DLTS-30	30	33.3	52.8	65.0	2	220	39
DLTS-30A	30	33.3	47.8	58.8	2	220	39
<b>Bidirectional</b>							
DLTS-8C	8	8.5	13.4	16.6	10	440	9
DLTS-8CA	8	8.5	12.2	15.0	10	440	9
DLTS-13C	13	14.4	22.8	28.1	4	385	18
DLTS-13CA	13	14.4	20.6	25.4	4	385	18
DLTS-19C	19	21.6	34.2	42.1	4	275	24
DLTS-19CA	19	21.6	31.0	38.1	4	275	24
DLTS-30C	30	33.3	52.8	65.0	4	165	39
DLTS-30CA	30	33.3	47.8	58.8	4	165	39


"C" suffix denotes bidirectional and "A" suffix provides a lower selected clamping voltage tolerance

**NOTE 1:** A TVS is normally selected according to the reverse "Stand Off Voltage"  $V_{WM}$  which should be equal to or greater than the dc or continuous peak operating voltage level.

**GRAPHS**

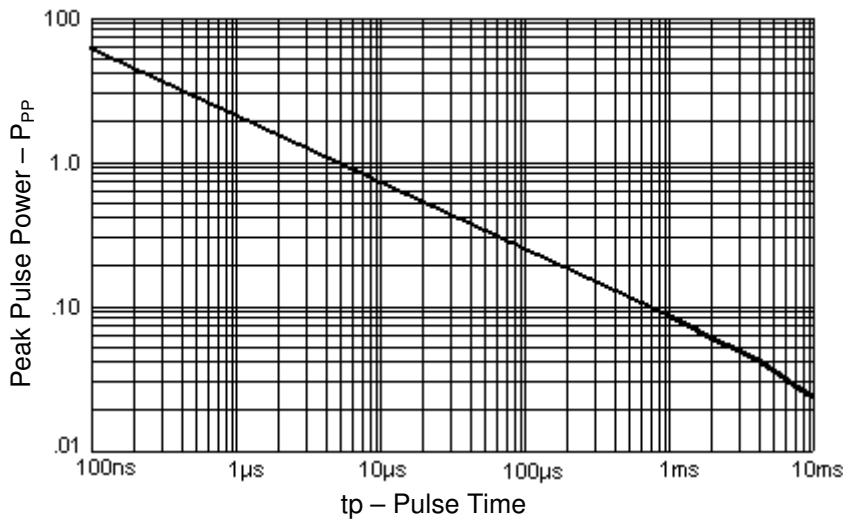

**FIGURE 1**  
Peak Pulse Power vs. Pulse Time (per position)

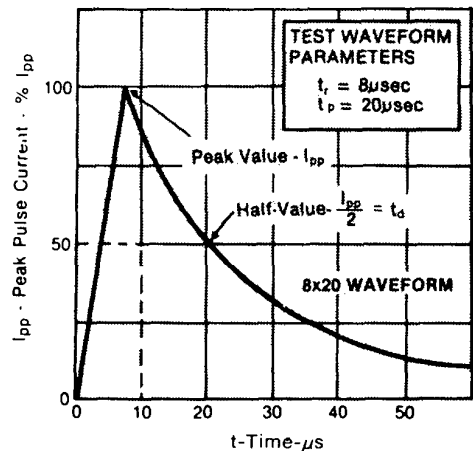

**FIGURE 2**  
Pulse Waveform

