



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



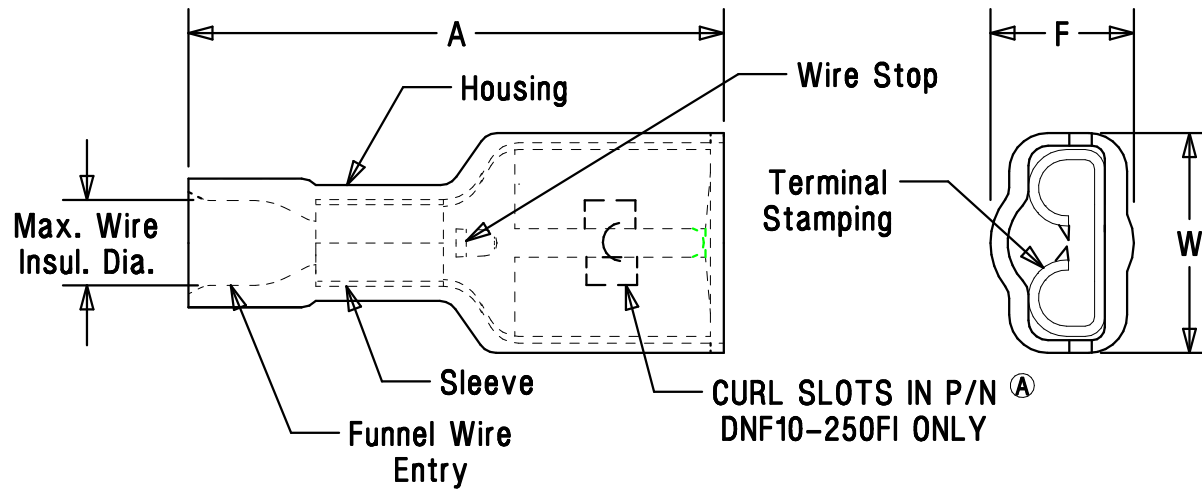

Notes:


1. 600V max voltage rating
2. 257°F (125°C) max temperature rating of insulation material .
3. Stranded copper wire only
4. Material:
 - A. Stamping - brass, tin plated
 - B. Sleeve - copper or brass, tin plated.
 - C. Housing - Nylon type 6/6. Colors are translucent.
5. Packaging: Std. - L = 50 C = 100 ²
Bulk - D = 500 M = 1000
6. Dimensions in bracket are in mm Or mm


CERTIFIED
 LR31212


LISTED
 20H3
 E78522

Base part number	Package Code	Wire range AWG (mm ²)	Tab size	Housing color	A ±.03 (.8)	W ±.02 (.5)	Max. Insul.	F ±.02 (.5)	Wire Strip length +1/32, -0 (+0.8, -0)	Crimp tools	
DNF18-250FI	-C -M	22-18 (0,5-1,0)	.250X.032 (6,3X,8)	Red	.94 (23,9)	.36 (9,1)	.14 (3,6)	.21 (5,3)	9/32 (7.1)	CT-1550 CT-1551	
DNF14-250FI	-C -M	16-14 (1,5-2,5)	.250X.032 (6,3X,8)	Blue	.94 (23,9)	.36 (9,1)	.16 (4,1)	.24 (6,1)		CT-2400 W/CT-2455 CRIMP HEAD	
DNF10-250FI	-L -D	12-10 (4,0-6,0)	.250X.032 (6,3X,8)	Yellow	.95 (24,1)	.36 (9,1)	.22 (5,6)	.27 (6,9)		CT-100 & CT-550 CT-460	

A41672_03

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY	CHK'D	SCALE	DRAWING NO.	
03	01/06	DAW	DAW	REMOVED DNF18-187,188FI, and DNF14-187,188FI	TR00075			 CORP. TINLEY PARK, ILLINOIS FULLY INSULATED (STD NYLON) FEMALE DISCONNECTS SLEEVED BARREL (LOOSE PIECE)				
02	1/05	KLFU	SKB	DNF10-250FI WAS .23(5,8) ADDED: (A) NOTE & GEOMETRY	12406	TRO	SKB		ES		NONE	A41672
01	5/01	KMD	SKB	ADDED DNF10-250FI TO TABLE. UDATED NOTE 5	09411	TRO	JAC					
00	3/99	ES	RLS	RELEASED	07540	TRO	JCJ					