



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

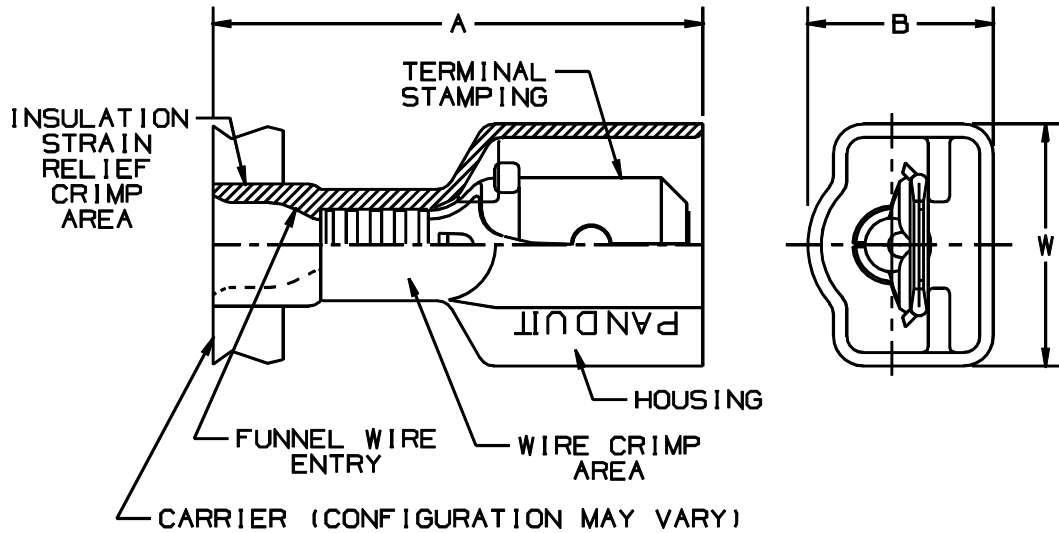

NOTES:


1. USED FOR:
 - A. 600V MAX VOLTAGE RATING
 - B. 221°F (105°C) MAX TEMP RATING
 - C. STRANDED COPPER WIRE ONLY
2. WIRE STRIP LENGTH: $9/32 \pm 1/32_{-0}^{+0}$ (7.1 $\pm 0.8_{-0}^{+0}$)
3. MATERIAL:
 - A. STAMPING: NICKEL PLATED BRASS
 - B. HOUSING: PREMIUM GRADE NYLON FOR SUPERIOR STRAIN RELIEF INSULATION CRIMPING
4. PACKAGING: -K = 1000 PCS CONTINUOUS MOLDED STRIP CARRIER
5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm²

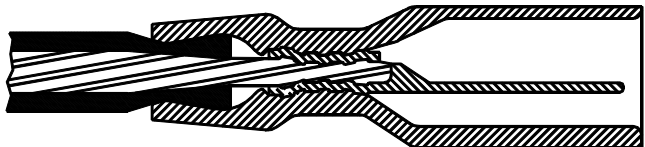

SECTION VIEW OF CRIMPED DISCONNECT

TOOL CHART RECOMMENDED PRESSES CP-861, CP-860 CP-851, CP-862	
CA-800 APPLICATOR DIE INSERTS	
CD-800-10 CA9-10B	CD-800-11 CA9-11B

PART NUMBER		TAB SIZE	WIRE RANGE AWG (mm ²)	COLOR	MAX WIRE INSULATION DIAMETER	MIN WIRE INSULATION DIAMETER	DIMENSIONS in		
PREFIX	PK						A $\pm .03$ (.8)	B $\pm .02$ (.5)	W $\pm .02$ (.5)
DPF18-250F1MB	-K	.250 X .032 (6.3 X 0.8)	22-18 (0.5-1.5)	RED	.133 (3.38)	.060 (1.52)	.92 (23.4)	.34 (8.6)	.46 (11.7)
DPF14-250F1MB	-K	.250 X .032 (6.3 X 0.8)	16-14 (1.5-2.5)	BLUE	.156 (3.96)	.090 (2.29)	.92 (23.4)	.34 (8.6)	.46 (11.7)



A41513_04

04	1/01	RM		FILESPEC WAS N41513AA_PCD_03							<p>TINLEY PARK, ILLINOIS</p> <p>REELSMART™ DISCOGRIP™ PREMIUM NYLON FULLY INSULATED UNIVERSAL MALE DISCONNECT .250 X .032</p>			
03	10/98	JKD		MATERIAL WAS TIN PLATED ADDED CP-862, CA9	07848									
02	10/96	TSM	RLS	UPDATED NOTES AND DIMENSIONS	05135	DH	LA							
01	2/93	BK	RLS	FILE SPEC WAS NPC_A41513_00 UPDATED UL/CSA	01448	DH	LA							
REV	DATE	BY	CHK	DESCRIPTION	ECN	QA	PM	SUP	CUST	APP	DRAWN BY KC	CHK'D	SCALE K	DRAWING NO A41513