



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



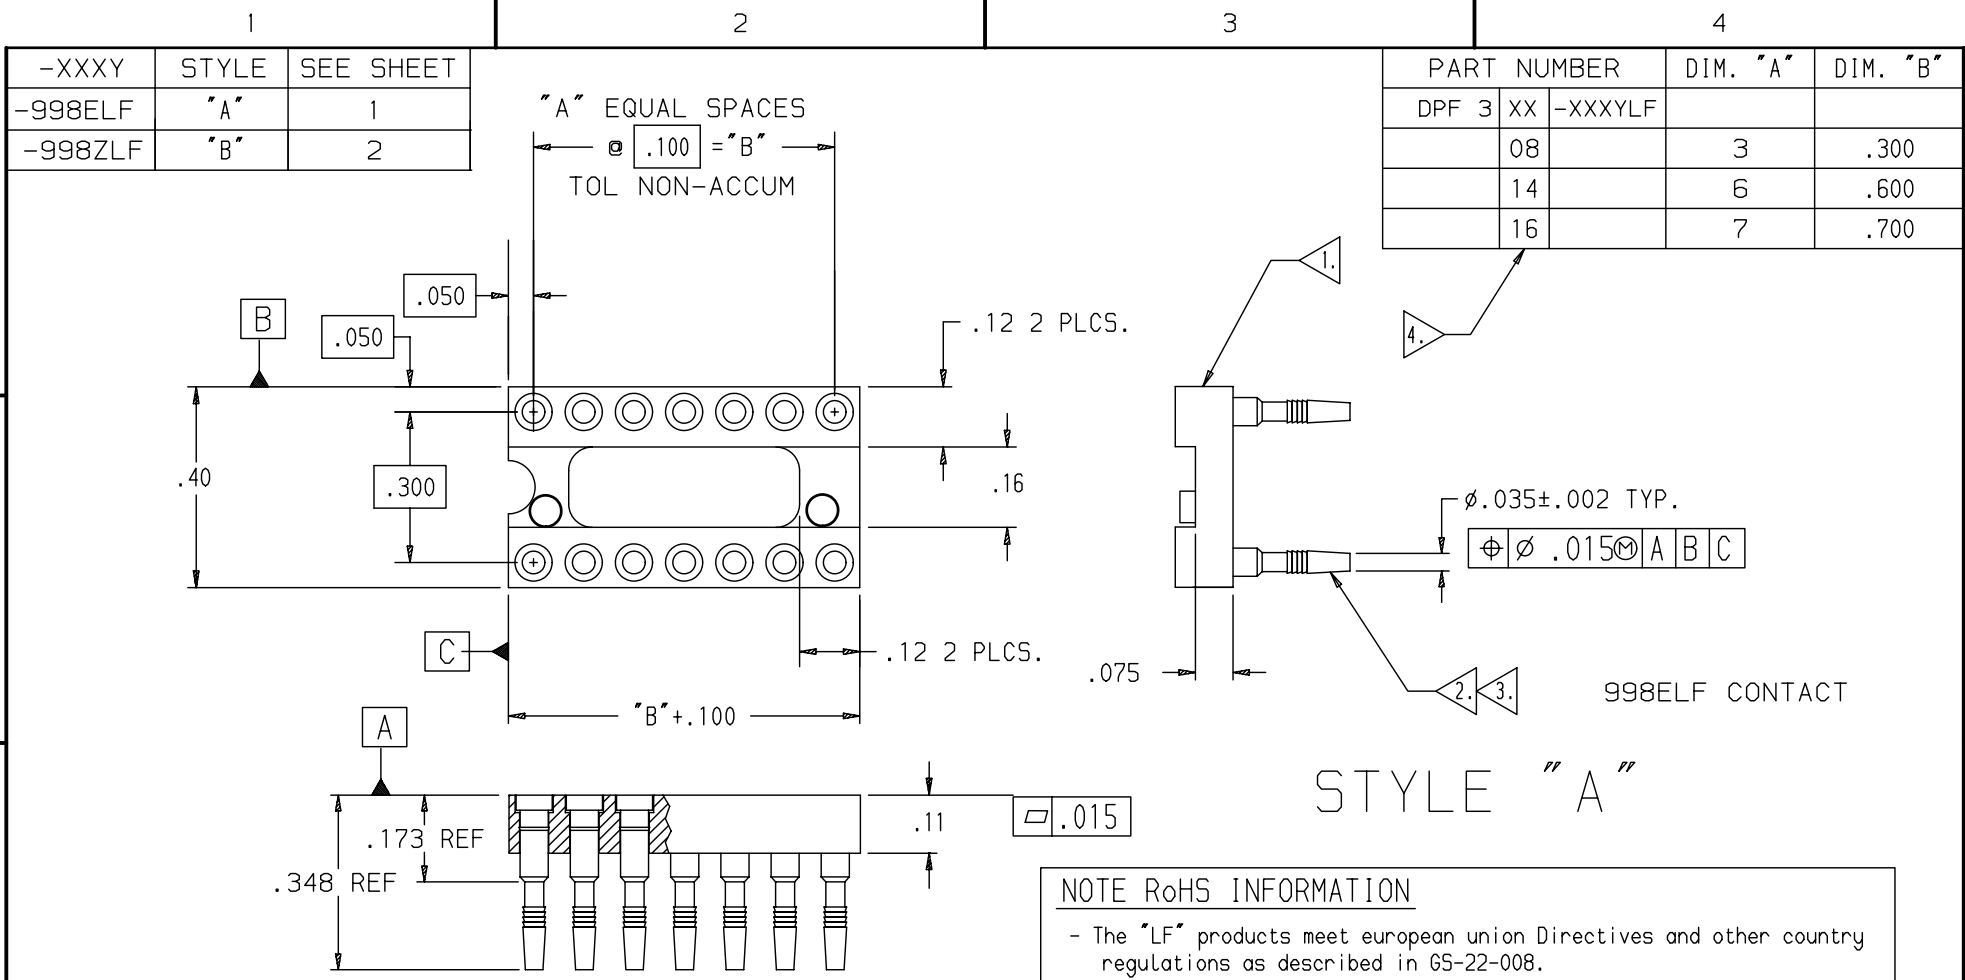

NOTES:

- 1 INSULATOR MATERIAL:
GLASS FILLED POLYESTER (PCT),
RATED UL 94V-0, COLOR BLACK.
- 2 CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD, PER ASTM B16.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172, PER ASTM B194.
- 3 CONTACT PLATING:
OUTER SHELL: 80-120u" TIN/LEAD PER SAE AMS-P-81728
OUTER SHELL: 80-120u" TIN for LF VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: #4(30), 200u" TIN/LEAD PER SAE-AMS-P-81728
INNER CONTACT: #4(30), 200u" TIN for LF VERSION
OVER 50u" NICKEL PER QQ-N-290.
- 4 NUMBER OF POSITIONS.

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/29
J	LS07-0299	HLE	2007/11/20
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
-	-	-	-
-	-	-	-
g	LS07-0141	HLE	2007/05/21

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection inch
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	D-WOLFORD	2000/02/14	0.X	±0.1
Eng	A-VASBINDER	2000/02/14	0.XX	±0.1
Chr	A-VASBINDER	2000/02/14	0.XXX	±0.1
Appr	A-VASBINDER	2000/02/14	ANGULAR 0.XX' ±2'	LINEAR
Product family			SOCKET	size A3
SPEC ref			RELEASED	Scale 1:1
FCI		title PRESS FIT DIP SOCKET	Rev. L	
catalog no		SEE TABLE	dwg no 58707	sheet 1 of 2




1

2

3


4

STYLE "B"

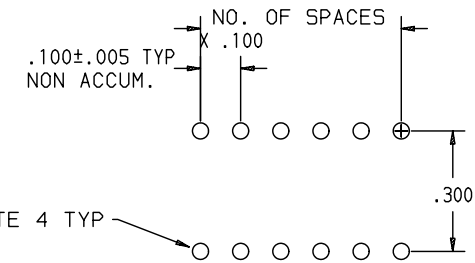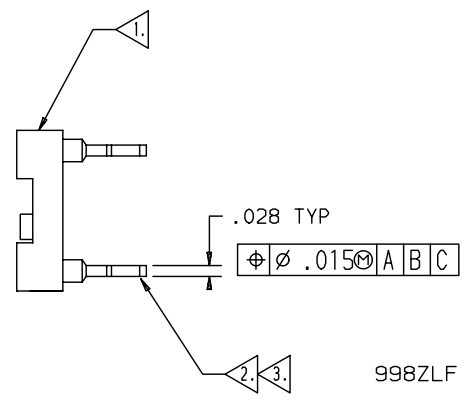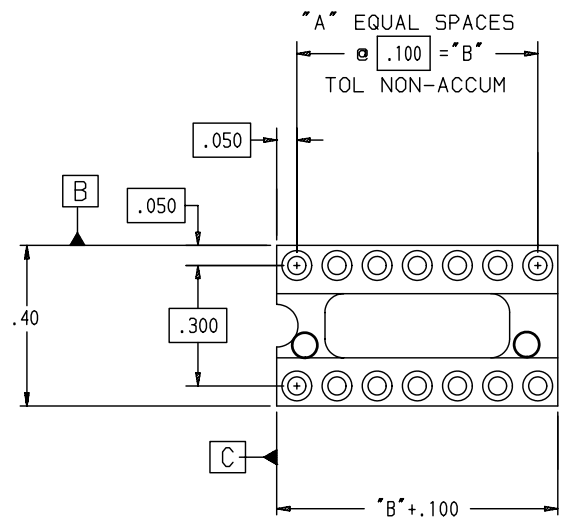

998ZLF CONTACT

THIS HOLE PATTERN APPLIES TO BOTH STYLE A AND STYLE B CONTACTS.

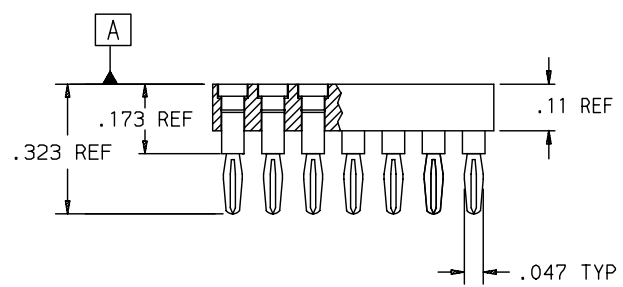

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in 65-22-008.
- Packaging spec: see 65-14-920

Copyright FCI. FCJ

NOTES:

- INSULATOR MATERIAL:
GLASS FILLED POLYESTER (PCT),
RATED UL 94V-0, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: PHOSPHOR BRONZE.
INNER CONTACT: BERYLLIUM COPPER.
- CONTACT PLATING:
OUTER SHELL: 200u" TIN/LEAD PER SAE AMS-P-81728
OUTER SHELL: 200u" TIN for LEAD FREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: #4(30), 200u" TIN/LEAD PER SAE-AMS-P-81728
INNER CONTACT: #4(30), 200u" TIN for LEADFREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
- COMPLIANT PRESS FIT IN $\varnothing .040 \pm .003$ PLATED HOLE, RECOMMENDED DRILL SIZE 1.15 MM FOR .090 TO .130 THICK BOARD.

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/29
J	LS07-0299	HLE	2007/11/20
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
-	-	-	-
-	-	-	-
G	LS07-0141	HLE	2007/05/21

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection inch
TOLERANCES UNLESS OTHERWISE SPECIFIED				
ANGULAR	LINEAR	0.X	±0.1	size A3
0.X' ±2'		0.XX	±0.1	Scale 1:1
		0.XXX	±0.1	ECN LS08-0051
Dr	D-WOLFORD	2000/02/14	Product family	SOCKET
Eng	A-VASBINDER	2000/02/14	Spec ref	RELEASED
Chr	A-VASBINDER	2000/02/14		
Appr	A-VASBINDER	2000/02/14		
FCJ		title PRESS FIT DIP SOCKET		Rev. L
DPF		catalog no	SEE TABLE	dwg no 58707
		customer	CUSTOMER	sheet 2 of 2

REV F - 2006-04-17

1

2

3

4