



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DR-25 Heat - Shrinkable Tubing

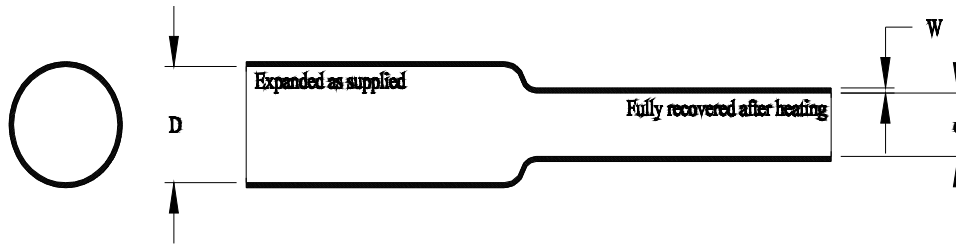


Table 1: Dimensions (inches)

Size	As Supplied	Recovered	
	Expanded I.D. Minimum (D)	Recovered I.D. Maximum (d)	Recovered Wall (W)
1/8	.125	.062	.030 ± .007
3/16	.187	.094	.033 ± .007
1/4	.250	.125	.035 ± .007

Color: Black

Requirements: Shall meet all the requirements of RT-1116, except as follows:


Flammability: Shall be self-extinguishing when tested as follows:

An 18-inch specimen of tubing shall be recovered over a 21-inch metal rod with a diameter equivalent to the maximum recovered diameter specified above. The specimen then shall be subjected to the vertical test in accordance with ASTM D 2671, Procedure B. The tubing shall be considered self-extinguishing only if it extinguishes within 1 minute after the final removal of the gas flame, and if not more than 25 percent of the indicator flag is burned or charred. Brown scorching or soot on the indicator flag shall not be cause for rejection.

Low Temperature Flexibility: Shall be in accordance with RT-1116, paragraph 4.3.3, using a 3/8 inch mandrel.

Shore Hardness: Shall not apply.

Specification Control Drawing

	TE Connectivity 300 Constitutional Drive Menlo Park, CA 94025 USA	Raychem	Title: DR-25 Heat - Shrinkable Tubing		
	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application		Document No : DR-25		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 16-Apr-11	Rev.: B1	Sheet: 1 of 1