



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Description**

- 165°C maximum total temperature operation
- Five sizes of Automotive grade shielded drum core inductors
- Inductance range from 0.28uH to 1000uH
- Current range up to 56 Amperes
- Mechanical secure mounting for high shock and vibration environments
- Good thermal dispersion with thermal conductive epoxy
- Customized dual winding versions available upon request for SEPIC or Flyback configurations

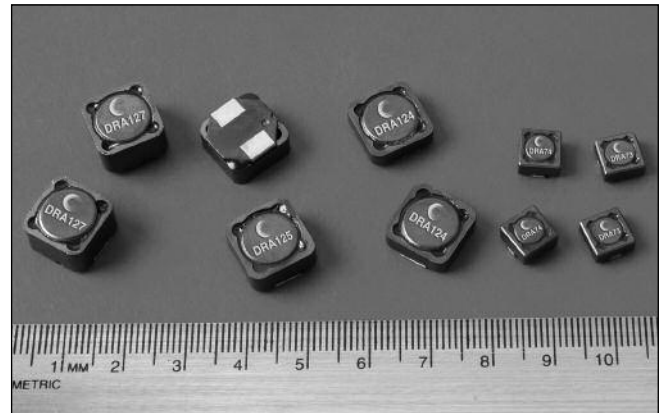

**Applications**

- Automotive Electronics (under the hood, interior/exterior)
- Telematics
- DC-DC converters
- Buck, boost, forward, and resonant converters
- Noise filtering and filter chokes

**Environmental Data**

- Storage temperature range: -40°C to +165°C
- Operating temperature range: -40°C to +165°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds max.
- Complies with AEC-Q200 standard

**Packaging**

- Supplied in tape and reel packaging, 1350 (DRA73), 1100 (DRA74), 750 (DRA124), 600 (DRA125), and 350 (DRA127) per reel

Part Number	Rated Inductance	OCL (1) µH +/-20%	Irms (2) Amperes	Isat (3) Amperes	Isat (4) Amperes	DCR (5) (Ω) Typ.	K-factor (6)
DRA73-R33-R	0.33	0.29	8.42	14.80	11.84	0.0040	60.6
DRA73-1R0-R	1.00	0.91	6.50	8.22	6.58	0.0067	33.7
DRA73-1R5-R	1.50	1.36	5.39	6.73	5.38	0.0097	27.5
DRA73-2R2-R	2.20	2.52	4.18	4.93	3.95	0.016	20.2
DRA73-3R3-R	3.30	3.18	3.59	4.35	3.48	0.022	17.8
DRA73-4R7-R	4.70	4.86	2.92	3.52	2.82	0.033	14.4
DRA73-6R8-R	6.80	6.63	2.62	2.96	2.37	0.041	12.1
DRA73-8R2-R	8.20	8.06	2.30	2.74	2.19	0.053	11.2
DRA73-100-R	10.0	10.27	2.11	2.39	1.91	0.064	9.8
DRA73-150-R	15.0	14.98	1.74	2.00	1.60	0.094	8.2
DRA73-220-R	22.0	22.39	1.42	1.64	1.32	0.141	6.7
DRA73-330-R	33.0	31.84	1.25	1.35	1.08	0.183	5.5
DRA73-470-R	47.0	47.83	1.02	1.10	0.884	0.275	4.5
DRA73-680-R	68.0	66.89	0.845	0.937	0.749	0.397	3.8
DRA73-820-R	82.0	83.77	0.731	0.851	0.680	0.530	3.5
DRA73-101-R	100	101.7	0.682	0.763	0.610	0.609	3.1
DRA73-151-R	150	151.1	0.551	0.632	0.506	0.932	2.6
DRA73-221-R	220	218.8	0.479	0.510	0.408	1.23	2.1
DRA73-331-R	330	326.4	0.391	0.423	0.338	1.85	1.7
DRA73-471-R	470	472.6	0.326	0.354	0.283	2.67	1.4
DRA73-681-R	680	682.9	0.270	0.297	0.238	3.89	1.2
DRA73-821-R	820	825.3	0.252	0.267	0.214	4.46	1.1
DRA73-102-R	1000	991.9	0.235	0.239	0.192	5.15	1.0

(1) Open Circuit Inductance test parameters: 100kHz, 0.25V, 0.0Adc, tolerance is ±20%  
(2) Irms: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 165°C under worst case operating conditions verified in the end application.  
(3) Isat Amperes peak for approximately 30% rolloff (@25°C)  
(4) Isat Amperes peak for approximately 40% rolloff (@125°C)

(5) DCR limits @ 25°C  
(6) K-factor: Used to determine B p-p for core loss (see graph).  
 $B\ p-p = K * L * \Delta I$ , B p-p(mT), K: (K factor from table), L: (Inductance in µH), ΔI (Peak to peak ripple current in Amperes).  
(7) Part Number Definition: DRAxxx-xxx-R  
DRAxxx = Product code and size; -xxx = Inductance value in uH;  
R = decimal point; If no R is present, third character = # of zeros.  
-R suffix = RoHS compliant

Part Number	Rated Inductance	OCL (1) μH ±20%	Irms (2) Amperes	Isat (3) Amperes	Isat (4) Amperes	DCR (5) (Ω) Typ.	K-factor (6)
DRA74-R33-R	0.33	0.288	7.26	18.40	14.72	0.0054	52.6
DRA74-1R0-R	1.00	0.897	6.01	10.22	8.18	0.0078	29.2
DRA74-1R5-R	1.50	1.31	5.55	8.36	6.69	0.0092	23.9
DRA74-2R2-R	2.20	2.33	4.82	6.13	4.91	0.012	17.5
DRA74-3R3-R	3.30	3.05	4.16	5.41	4.33	0.016	15.5
DRA74-4R7-R	4.70	4.68	3.41	4.38	3.50	0.024	12.5
DRA74-6R8-R	6.80	6.51	2.91	3.68	2.94	0.034	10.5
DRA74-8R2-R	8.20	8.51	2.66	3.17	2.54	0.040	9.1
DRA74-100-R	10.0	9.62	2.56	2.97	2.37	0.043	8.5
DRA74-150-R	15.0	15.14	2.06	2.36	1.89	0.067	6.7
DRA74-220-R	22.0	22.25	1.68	1.96	1.57	0.100	5.6
DRA74-330-R	33.0	33.21	1.37	1.61	1.29	0.151	4.6
DRA74-470-R	47.0	46.56	1.14	1.37	1.099	0.219	3.9
DRA74-680-R	68.0	68.37	0.996	1.108	0.887	0.286	3.2
DRA74-820-R	82.0	81.45	0.879	1.034	0.827	0.367	3.0
DRA74-101-R	100	98.5	0.822	0.929	0.743	0.419	2.7
DRA74-151-R	150	150.9	0.661	0.748	0.598	0.648	2.1
DRA74-221-R	220	218.9	0.544	0.626	0.501	0.96	1.8
DRA74-331-R	330	328.9	0.435	0.514	0.411	1.50	1.5
DRA74-471-R	470	471.5	0.383	0.420	0.336	1.93	1.2
DRA74-681-R	680	682.8	0.315	0.352	0.282	2.86	1.0
DRA74-821-R	820	815.0	0.279	0.327	0.262	3.63	0.9
DRA74-102-R	1000	1001.7	0.260	0.292	0.234	4.19	0.8
DRA124-R47-R	0.47	0.423	15.15	30.80	24.6	0.0019	16.7
DRA124-1R0-R	1.00	0.821	11.65	22.00	17.6	0.0031	12.0
DRA124-1R5-R	1.50	1.36	9.36	17.11	13.7	0.0049	9.3
DRA124-2R2-R	2.20	2.04	7.64	14.00	11.2	0.007	7.6
DRA124-3R3-R	3.30	2.79	6.94	11.85	9.48	0.009	6.4
DRA124-4R7-R	4.70	4.74	5.47	9.06	7.25	0.014	4.9
DRA124-6R8-R	6.80	7.28	4.46	7.33	5.87	0.021	4.0
DRA124-8R2-R	8.20	8.88	3.87	6.70	5.36	0.028	3.6
DRA124-100-R	10.0	10.37	3.67	6.16	4.93	0.031	3.3
DRA124-150-R	15.0	14.10	3.10	5.31	4.25	0.044	2.9
DRA124-220-R	22.0	23.00	2.44	4.16	3.33	0.071	2.3
DRA124-330-R	33.0	34.13	1.98	3.42	2.74	0.108	1.9
DRA124-470-R	47.0	46.27	1.78	2.91	2.325	0.134	1.6
DRA124-680-R	68.0	69.77	1.454	2.369	1.895	0.201	1.3
DRA124-820-R	82.0	80.57	1.285	2.232	1.786	0.257	1.2
DRA124-101-R	100	98.8	1.199	2.000	1.600	0.296	1.1
DRA124-151-R	150	151.7	0.967	1.621	1.297	0.454	0.9
DRA124-221-R	220	209.6	0.865	1.363	1.090	0.568	0.7
DRA124-331-R	330	326.9	0.690	1.092	0.874	0.892	0.6
DRA124-471-R	470	473.0	0.568	0.911	0.729	1.32	0.5
DRA124-681-R	680	682.1	0.466	0.759	0.607	1.96	0.4
DRA124-821-R	820	826.7	0.406	0.697	0.557	2.57	0.4
DRA124-102-R	1000	1001.0	0.380	0.629	0.503	2.94	0.3
DRA125-R47-R	0.47	0.453	18.47	33.20	26.56	0.0016	16.7
DRA125-1R0-R	1.00	0.854	15.94	23.71	18.97	0.0021	12.0
DRA125-1R5-R	1.50	1.41	12.89	18.44	14.76	0.0033	9.3
DRA125-2R2-R	2.20	2.12	10.61	15.09	12.07	0.0048	7.6
DRA125-3R3-R	3.30	2.89	9.69	12.77	10.22	0.0058	6.4
DRA125-4R7-R	4.70	4.90	7.67	9.76	7.81	0.0092	4.9
DRA125-6R8-R	6.80	6.23	6.81	8.74	6.99	0.012	4.4
DRA125-8R2-R	8.20	7.49	6.41	7.90	6.32	0.013	4.0
DRA125-100-R	10.0	9.22	5.57	7.22	5.77	0.017	3.6

(1) Open Circuit Inductance test parameters: 100kHz, 0.25V, 0.0A dc, tolerance is ±20%  
(2) I rms: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 165°C under worst case operating conditions verified in the end application.  
(3) Isat Amperes peak for approximately 30% rolloff (@25°C)  
(4) Isat Amperes peak for approximately 40% rolloff (@125°C)

(5) DCR limits @ 25°C  
(6) K-factor: Used to determine B p-p for core loss (see graph).  
 $B p-p = K \cdot L \cdot \Delta I$ , B p-p(mT), K: (K factor from table), L: (Inductance in μH), ΔI (Peak to peak ripple current in Amps).  
(7) Part Number Definition: DRAxxx-xxx-R  
DRAxxx = Product code and size; -xxx = Inductance value in μH;  
R = decimal point; If no R is present, third character = # of zeros.  
-R suffix = RoHS compliant


Part Number	Rated Inductance	OCL (1) µH +/-20%	Irms (2) Amperes	Isat (3) Amperes	Isat (4) Amperes	DCR (5) (Ω) Typ.	K-factor (6)
DRA125-150-R	15.0	14.67	4.45	5.72	4.58	0.027	2.9
DRA125-220-R	22.0	20.65	3.95	4.74	3.79	0.035	2.4
DRA125-330-R	33.0	31.47	3.19	3.86	3.09	0.053	1.9
DRA125-470-R	47.0	47.83	2.59	3.13	2.506	0.081	1.6
DRA125-680-R	68.0	68.48	2.125	2.635	2.108	0.120	1.3
DRA125-820-R	82.0	80.86	2.005	2.406	1.925	0.135	1.2
DRA125-101-R	100	97.6	1.745	2.213	1.771	0.178	1.1
DRA125-151-R	150	150.0	1.409	1.785	1.428	0.273	0.9
DRA125-221-R	220	222.8	1.142	1.469	1.175	0.416	0.7
DRA125-331-R	330	325.1	0.998	1.194	0.955	0.543	0.6
DRA125-471-R	470	466.3	0.826	1.006	0.805	0.79	0.5
DRA125-681-R	680	683.3	0.673	0.834	0.667	1.20	0.4
DRA125-821-R	820	813.6	0.632	0.758	0.606	1.36	0.4
DRA125-102-R	1000	992.8	0.552	0.695	0.556	1.78	0.4
DRA127-R47-R	0.47	0.413	22.50	56.0	44.8	0.0012	14.3
DRA127-1R0-R	1.00	0.772	19.22	40.0	32.0	0.0017	10.2
DRA127-1R5-R	1.50	1.27	15.32	31.1	24.9	0.0027	7.9
DRA127-2R2-R	2.20	1.92	12.52	25.5	20.4	0.0040	6.5
DRA127-3R3-R	3.30	3.51	9.59	18.7	14.93	0.0068	4.8
DRA127-4R7-R	4.70	4.58	8.14	16.5	13.18	0.0094	4.2
DRA127-6R8-R	6.80	6.72	7.32	13.3	10.67	0.012	3.4
DRA127-8R2-R	8.20	8.33	6.33	12.2	9.74	0.016	3.1
DRA127-100-R	10.0	9.63	6.02	11.2	8.96	0.017	2.9
DRA127-150-R	15.0	14.90	4.83	9.03	7.23	0.027	2.3
DRA127-220-R	22.0	21.47	3.98	7.57	6.05	0.040	1.9
DRA127-330-R	33.0	32.01	3.22	6.22	4.98	0.060	1.6
DRA127-470-R	47.0	47.91	2.62	5.09	4.07	0.091	1.3
DRA127-680-R	68.0	68.22	2.333	4.18	3.34	0.115	1.1
DRA127-820-R	82.0	83.91	2.008	3.84	3.07	0.155	1.0
DRA127-101-R	100	100.8	1.888	3.46	2.77	0.175	0.9
DRA127-151-R	150	151.2	1.524	2.83	2.26	0.269	0.7
DRA127-221-R	220	219.8	1.253	2.35	1.88	0.398	0.6
DRA127-331-R	330	328.3	1.011	1.93	1.54	0.612	0.5
DRA127-471-R	470	474.5	0.827	1.62	1.29	0.91	0.4
DRA127-681-R	680	676.6	0.736	1.33	1.06	1.15	0.3
DRA127-821-R	820	824.6	0.637	1.22	0.978	1.54	0.3
DRA127-102-R	1000	998.7	0.598	1.10	0.878	1.75	0.3

- (1) Open Circuit Inductance test parameters: 100kHz, 0.25V, 0.0A<sub>dc</sub>, tolerance is ±20%
- (2) I<sub>rms</sub>: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 165°C under worst case operating conditions verified in the end application.
- (3) Isat Amperes peak for approximately 30% rolloff (@25°C)
- (4) Isat Amperes peak for approximately 40% rolloff (@125°C)

- (5) DCR limits @ 25°C
- (6) K-factor: Used to determine B p-p for core loss (see graph).  
 $B_{p-p} = K \cdot L \cdot \Delta I$ , B p-p(mT), K: (K factor from table), L: (Inductance in µH), ΔI (Peak to peak ripple current in Amps).
- (7) Part Number Definition: DRAxxx-xxx-R  
 DRAxxx = Product code and size; -xxx = Inductance value in µH;  
 R = decimal point; If no R is present, third character = # of zeros.  
 -R suffix = RoHS compliant

**Mechanical Diagrams**

**DRA73 Series**

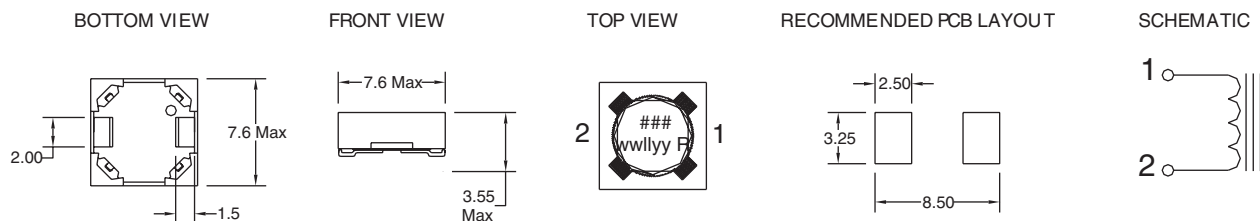


Dimensions in Millimeters.


### = Inductance value in µH. R = decimal point.  
 If no R is present third character = # of zeros  
 willy = (date code) R = revision level

**Mechanical Diagrams**


**DRA74 Series**

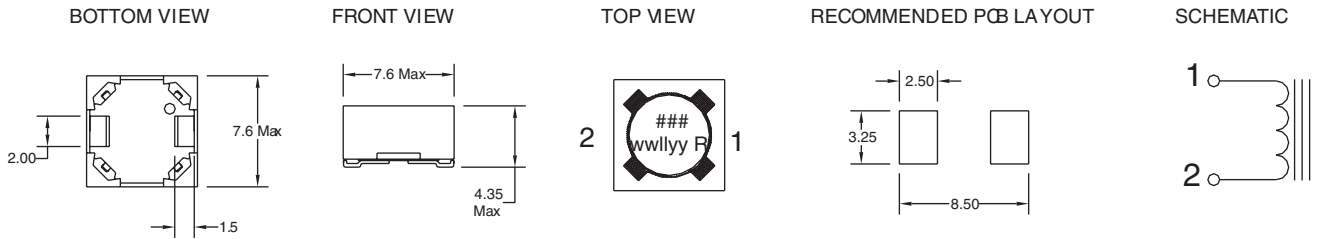


**DRA124 Series**

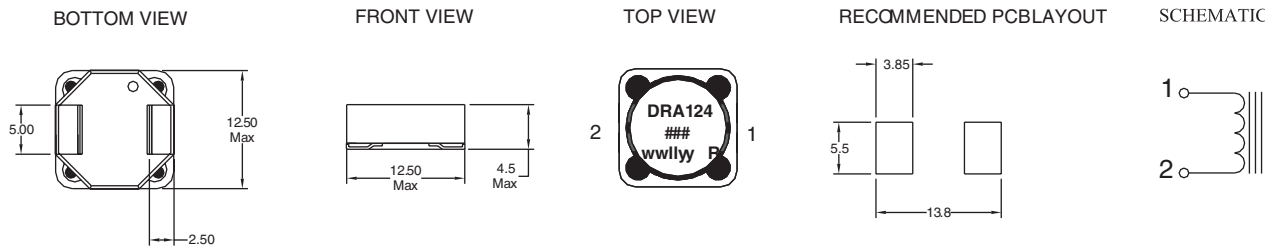

**DRA125 Series**

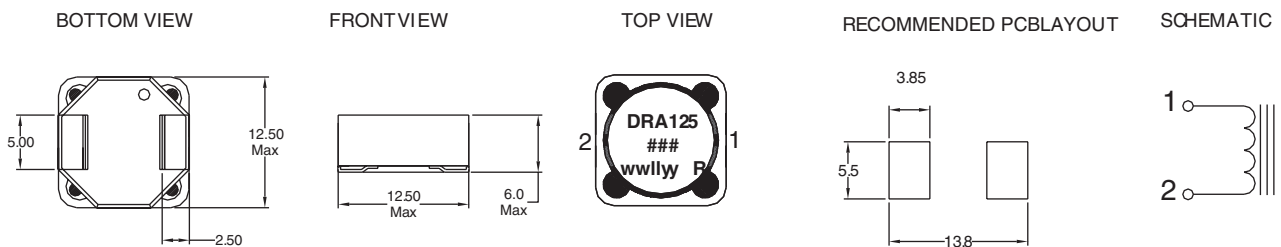

**DRA127 Series**

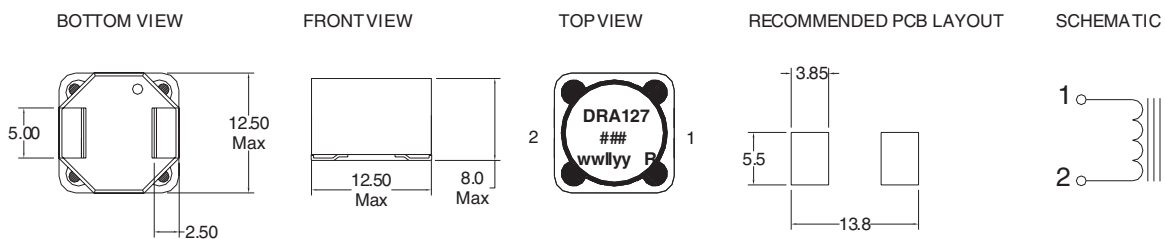


Dimensions in Millimeters.

### = Inductance value in uH. R = decimal point.  
 If no R is present third character = # of zeros  
 wwllly = (date code) R = revision level

**Packaging Information**

**DRA73 Series**


A0= 7.90mm  
 B0= 7.90 mm  
 K0= 3.80mm

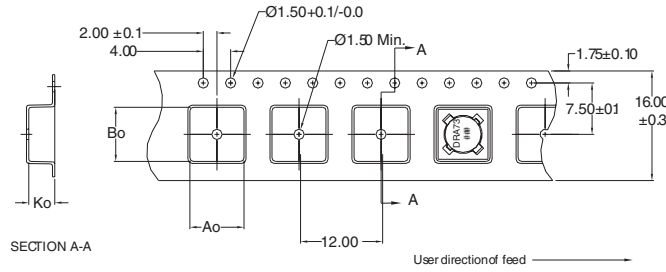

Parts packaged on 13" Diameter reel,  
 1,350 parts per reel.

**DRA74 Series**


A0= 7.90 mm  
 B0= 7.90 mm  
 K0= 4.70 mm

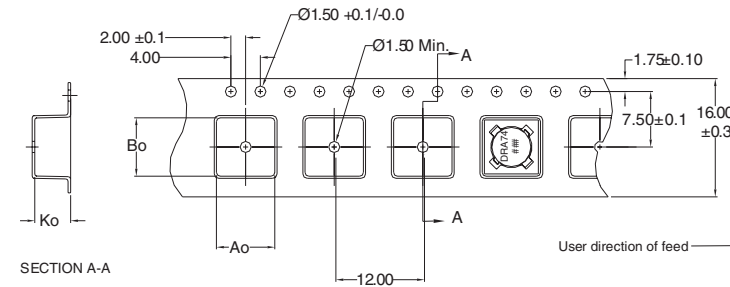

Parts packaged on 13" Diameter reel,  
 1,100 parts per reel.

**DRA124 Series**


A0= 13.00mm  
 B0= 13.00mm  
 K0= 4.90mm

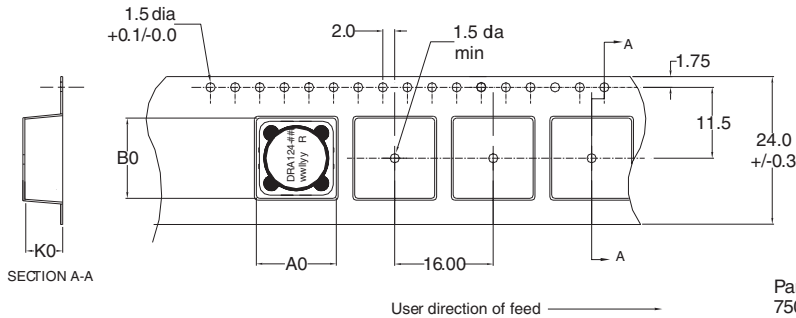

Parts packaged on 13" Diameter reel,  
 750 parts per reel.

**DRA125 Series**


A0= 13.00 mm  
 B0= 13.00 mm  
 K0= 6.30mm

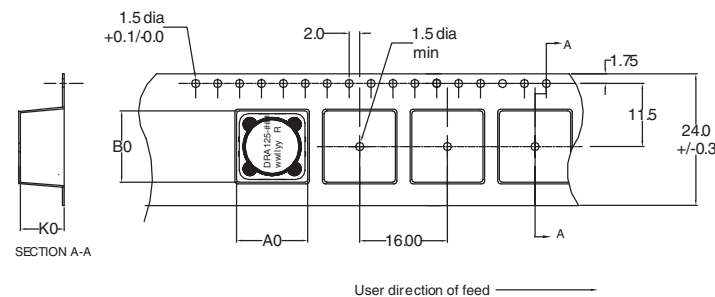

Parts packaged on 13" Diameter reel,  
 600 parts per reel.

**DRA127 Series**


A0= 13.00mm  
 B0= 13.00 mm  
 K0= 8.30mm

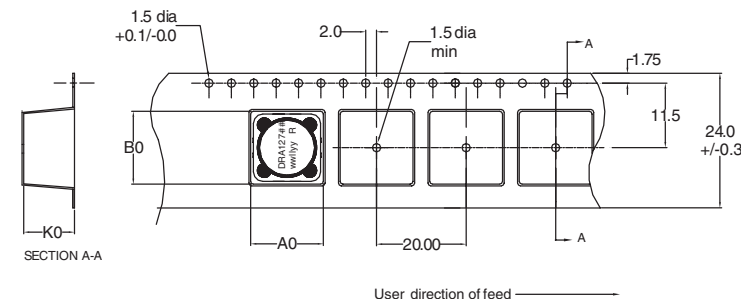


Parts packaged on 13" Diameter reel,  
 350 parts per reel.

Temperature Rise vs. Watt Loss


DRA 73 series

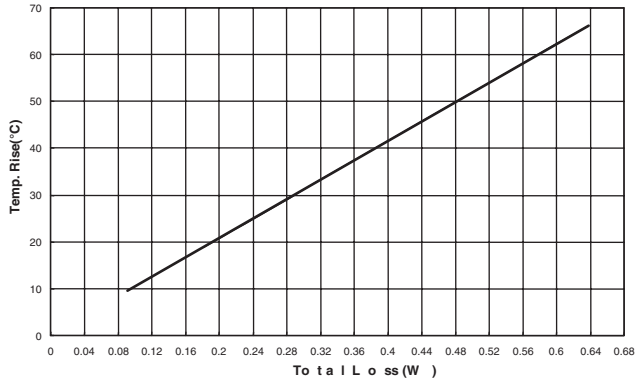


DRA 74 series

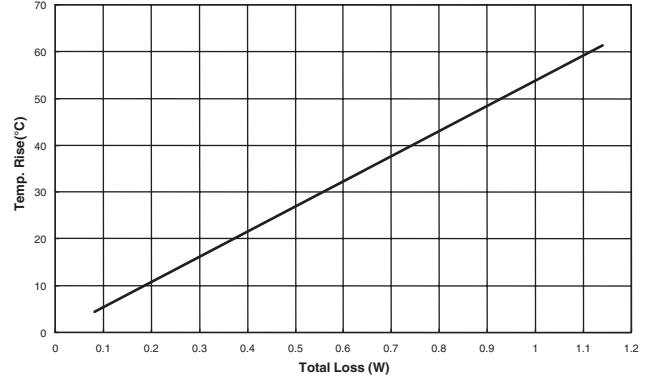


DRA 124 series

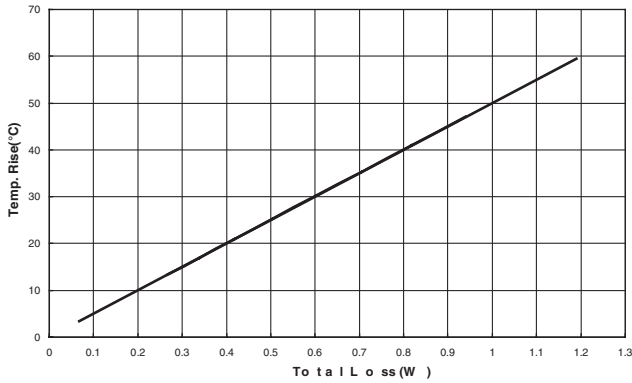

DRA 125 series

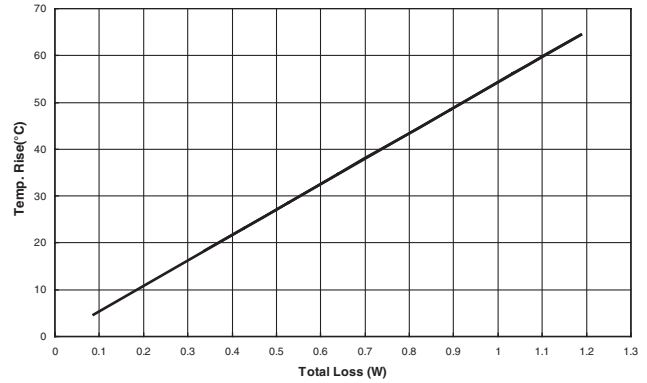


DRA 127 series

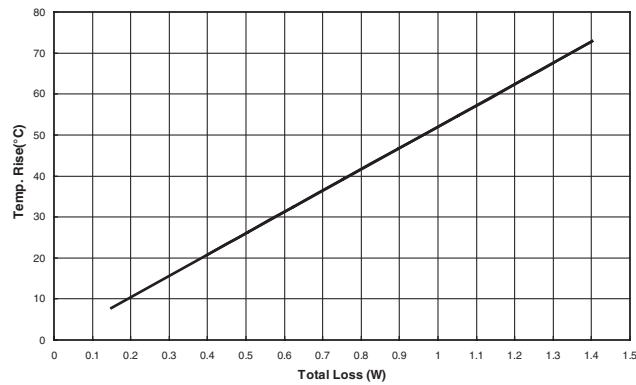


**Inductance Characteristics**


OCL vs Isat/DRA 73 series

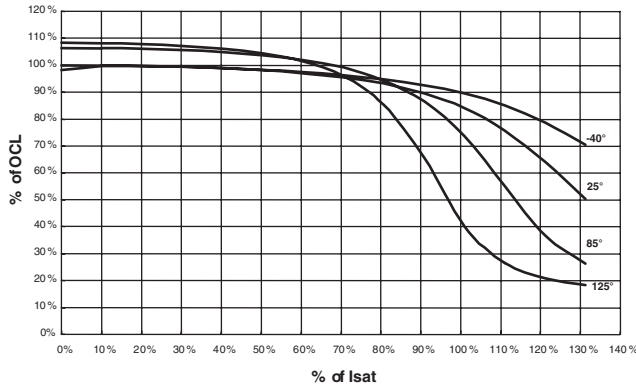


OCL vs Isat/DRA 74 series

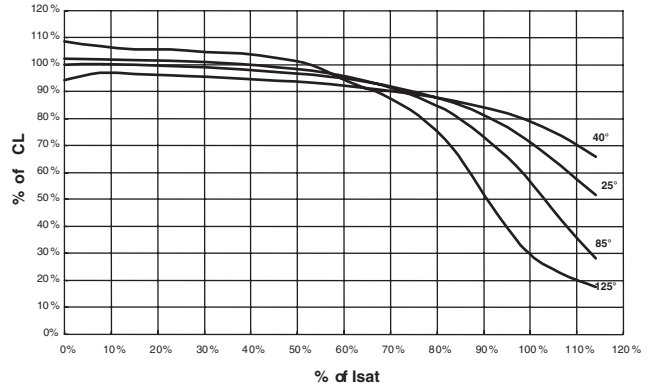


OCL vs Isat/DRA 124 series

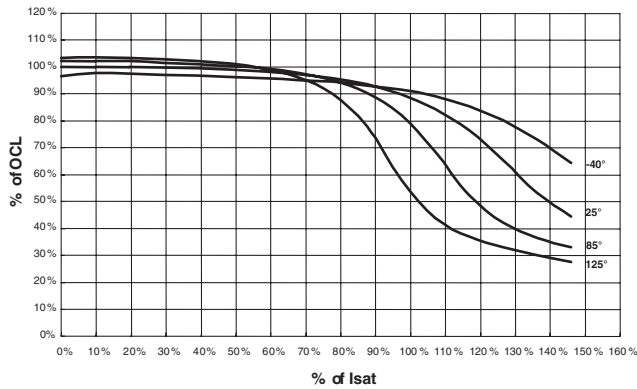

OCL vs Isat/DRA 125 series

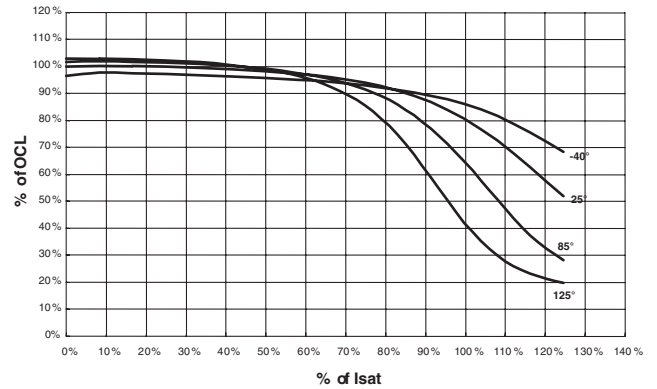


OCL vs Isat/DRA 127 series

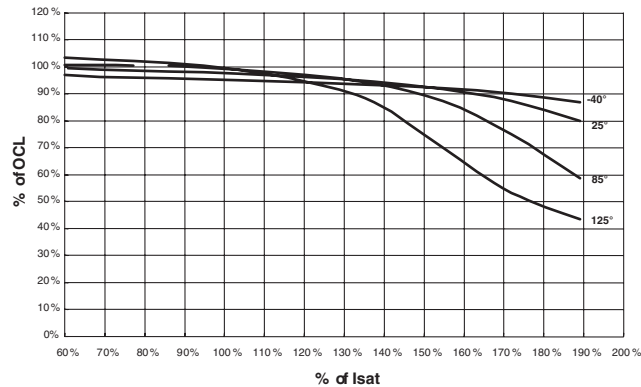




**Inductance Characteristics**


DRA 73 series

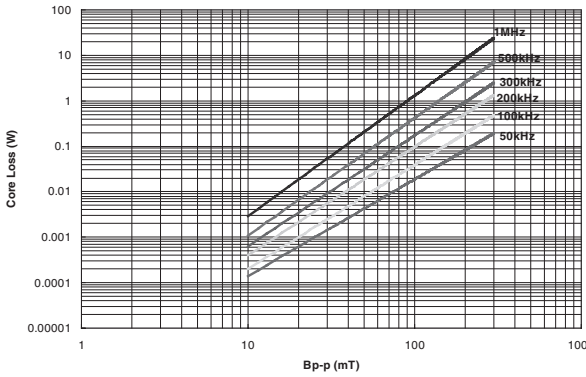


DRA 74 series

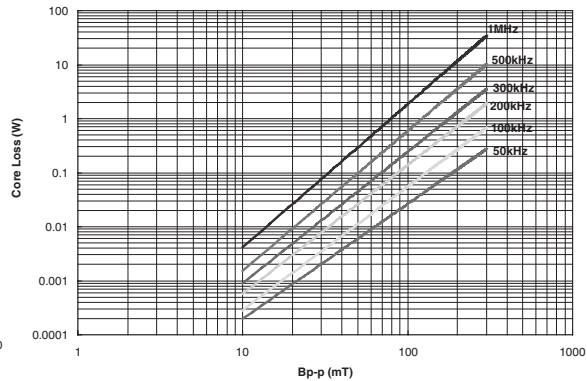

DRA 124 series

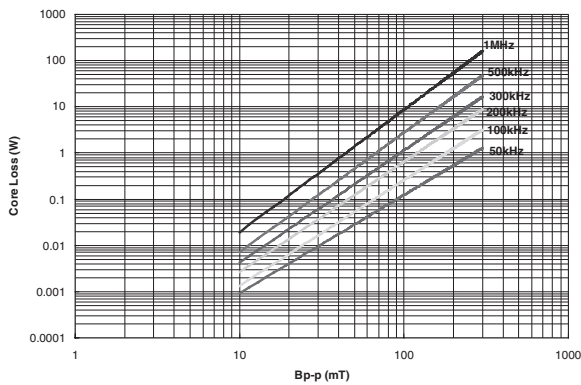

DRA 125 series

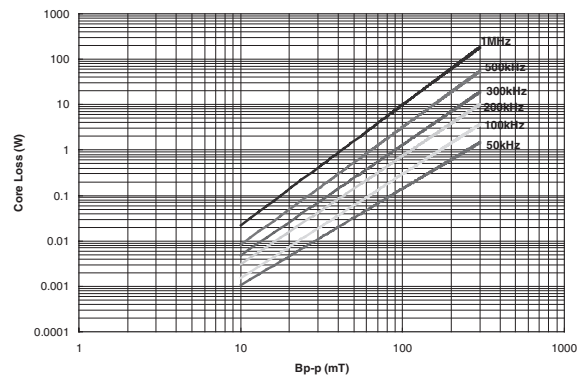

DRA 127 series

