



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NAIS

HIGHLY SENSITIVE 1500 V FCC SURGE WITHSTANDING MINIATURE RELAY

DS-RELAYS

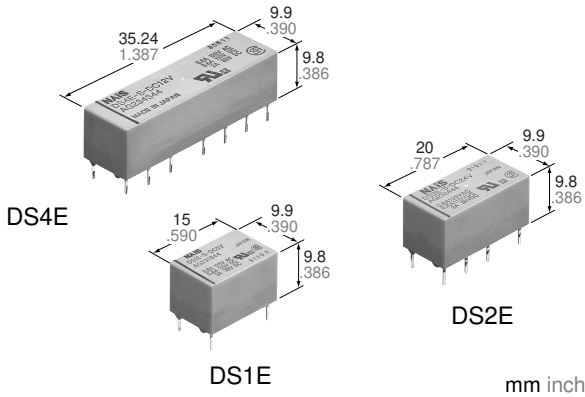

FEATURES

- High sensitivity: 200 mW pick-up power
100 mW pick-up power types available
- Latching types available
- High switching capacity: 60 W, 125 V A
- High breakdown voltage: 1,500 V FCC surge between open contacts
1,000 V AC between open contacts
- DIP-1C type can be used with 14 pin IC socket
2C type can be used with 16 pin IC socket,
4C type can be used with 2 sets of 14 pin IC sockets
- Gold-cap silver palladium types available for 2 Form C type
- Bifurcated contacts are standard

SPECIFICATIONS

Contact

| | | |
|--|------------------------------------|--|
| Arrangement | 1 Form C, 2 Form C, 4 Form C | |
| Initial contact resistance, max. (By voltage drop 6 V DC 1 A) | 50 mΩ | |
| Contact material | Gold-clad silver | |
| Rating (resistive) | Max. switching power | 60 W, 125 VA |
| | Max. switching voltage | 220 V DC, 250 V AC |
| | Max. switching current | 2 A DC, AC |
| | Max. carrying current | 3 A DC, AC |
| Expected life (min. operations) | Mechanical (at 600 cpm) | 10 ⁸ (1 Form C 2 coil latching type: 10 ⁷) |
| | Electrical 2 A 30 VDC resistive | 5×10 ⁵ |

* Gold capped silver-palladium contact also available for 2 Form C 10⁷ operations at 0.1 A 50 V DC resistive

Coil (polarized) (at 20°C 68°F)

| M type | Single side stable | Minimum operating power | |
|--------|--------------------|-----------------------------|--------------------------|
| | | Approx. 200 mW | Approx. 400 mW |
| M type | 1 coil latching | Minimum set and reset power | Approx. 90 mW |
| | | Nominal set and reset power | Approx. 180 mW |
| | 2 coil latching | Minimum set and reset power | Approx. 180 mW |
| | | Nominal set and reset power | Approx. 360 mW |
| S type | Single side stable | Minimum operating power | Approx. 100 mW (128 mW)* |
| | | Nominal operating power | Approx. 200 mW |
| | 1 coil latching | Minimum set and reset power | Approx. 45 mW (58 mW)* |
| | | Nominal set and reset power | Approx. 90 mW |
| | 2 coil latching | Minimum set and reset power | Approx. 90 mW (115 mW)* |
| | | Nominal set and reset power | Approx. 180 mW |

* For 1 Form C high sensitive types.

Characteristics (at 20°C 68°F)

| | | | |
|---|--|--|---------------|
| Max. operating speed | 20 cpm at rated load 50 cps at low level load | | |
| Initial insulation resistance* ¹ | Min. 100 MΩ (at 500 V DC) | | |
| Initial break-down voltage* ² | Type of relay | (DS1-S type) | (Other types) |
| | Between open contacts | 500 Vrms | 1,000 Vrms |
| | Between contacts sets | — | 1,000 Vrms |
| | Between contacts and coil | 1,000 Vrms | 1,500 Vrms |
| FCC surge voltage between contacts and coil | 1,500 V (Expect DS1-S type) | | |
| Operate time* ³ (at nominal voltage) | Approx. 3 ms | | |
| Release time (without diode)* ³ (at nominal voltage) | Approx. 2 ms | | |
| Set time* ³ (at nominal voltage) | Approx. 3 ms | | |
| Reset time* ³ (at nominal voltage) | Approx. 3 ms | | |
| Temperature rise (at nominal voltage, Contact current: 2A) | Max. 65°C | | |
| Shock resistance | Functional* ⁴ | 1C, 2C:Min. 490 m/s ² {50 G} 4C:Min. 294 m/s ² {30 G} | |
| | Destructive* ⁵ | Min. 980 m/s ² {100 G} | |
| Vibration resistance | Functional* ⁶ | 10 to 55 Hz at double amplitude of 3.3 mm | |
| | Destructive | 10 to 55 Hz at double amplitude of 5 mm | |
| Conditions for operation, transport and storage* ⁷ (Not freezing and condensing at low temperature) | Ambient temp. | -40°C to +70°C -40°F to +158°F | |
| | Humidity | 5 to 85% R.H. | |
| Unit weight | 1 Form C | Approx. 3.2g .11oz | |
| | 2 Form C | Approx. 4g .14oz | |
| | 4 Form C | Approx. 7g .25oz | |

Remarks

* Specifications will vary with foreign standards certification ratings.

*¹ Measurement at same location as "Initial breakdown voltage" section

*² Detection current: 10 mA

*³ Excluding contact bounce time


*⁴ Half-wave pulse of sine wave: 11ms; detection time: 10μs

*⁵ Half-wave pulse of sine wave: 6ms

*⁶ Detection time: 10μs

*⁷ Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61)

FCC (Federal Communication Commission) requests following standard as Breakdown Voltage specification.

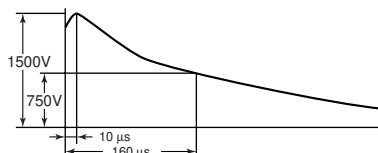

TYPICAL APPLICATIONS ORDERING INFORMATION

- Telecommunication equipment
- Office equipment
- Computer peripherals
- Security equipment
- Measuring instrumentation

Ex DS 2 E — M L2 — DC 48 V — R *

| Contact arrangement | Classification of type | Sensitivity | Operating function | Coil voltage |
|---|------------------------|--|--|----------------------------------|
| 1: 1 Form C 2: 2 Form C 4: 4 Form C | E: Amber sealed type | M: 400 mW nominal operating power S: 200 mW nominal operating power | Nil: Single side stable L: 1 coil latching L2: 2 coil latching | DC 1.5, 3, 5, 6, 9, 12, 24, 48 V |

*Reverse polarity types available (add suffix-R). Standard packing: Carton: 50 pcs.; Case: 500 pcs.

TYPES

Single side stable

| | Nominal Voltage, V DC | Part No. | | |
|-----------------------|-----------------------|---------------|---------------|---------------|
| | | 1 Form C | 2 Form C | 4 Form C |
| M (400 mW) type | 1.5 | DS1E-M-DC1.5V | DS2E-M-DC1.5V | DS4E-M-DC1.5V |
| | 3 | DS1E-M-DC3V | DS2E-M-DC3V | DS4E-M-DC3V |
| | 5 | DS1E-M-DC5V | DS2E-M-DC5V | DS4E-M-DC5V |
| | 6 | DS1E-M-DC6V | DS2E-M-DC6V | DS4E-M-DC6V |
| | 9 | DS1E-M-DC9V | DS2E-M-DC9V | DS4E-M-DC9V |
| | 12 | DS1E-M-DC12V | DS2E-M-DC12V | DS4E-M-DC12V |
| | 24 | DS1E-M-DC24V | DS2E-M-DC24V | DS4E-M-DC24V |
| S (200 mW) type | 1.5 | DS1E-S-DC1.5V | DS2E-S-DC1.5V | DS4E-S-DC1.5V |
| | 3 | DS1E-S-DC3V | DS2E-S-DC3V | DS4E-S-DC3V |
| | 5 | DS1E-S-DC5V | DS2E-S-DC5V | DS4E-S-DC5V |
| | 6 | DS1E-S-DC6V | DS2E-S-DC6V | DS4E-S-DC6V |
| | 9 | DS1E-S-DC9V | DS2E-S-DC9V | DS4E-S-DC9V |
| | 12 | DS1E-S-DC12V | DS2E-S-DC12V | DS4E-S-DC12V |
| | 24 | DS1E-S-DC24V | DS2E-S-DC24V | DS4E-S-DC24V |
| | 48 | DS1E-S-DC48V | DS2E-S-DC48V | DS4E-S-DC48V |

1 coil latching

| | Nominal Voltage, V DC | Part No. | | |
|-----------------------|-----------------------|----------------|----------------|----------------|
| | | 1 Form C | 2 Form C | 4 Form C |
| M (180 mW) type | 1.5 | DS1E-ML-DC1.5V | DS2E-ML-DC1.5V | DS4E-ML-DC1.5V |
| | 3 | DS1E-ML-DC3V | DS2E-ML-DC3V | DS4E-ML-DC3V |
| | 5 | DS1E-ML-DC5V | DS2E-ML-DC5V | DS4E-ML-DC5V |
| | 6 | DS1E-ML-DC6V | DS2E-ML-DC6V | DS4E-ML-DC6V |
| | 9 | DS1E-ML-DC9V | DS2E-ML-DC9V | DS4E-ML-DC9V |
| | 12 | DS1E-ML-DC12V | DS2E-ML-DC12V | DS4E-ML-DC12V |
| | 24 | DS1E-ML-DC24V | DS2E-ML-DC24V | DS4E-ML-DC24V |
| S (90 mW) type | 1.5 | DS1E-SL-DC1.5V | DS2E-SL-DC1.5V | DS4E-SL-DC1.5V |
| | 3 | DS1E-SL-DC3V | DS2E-SL-DC3V | DS4E-SL-DC3V |
| | 5 | DS1E-SL-DC5V | DS2E-SL-DC5V | DS4E-SL-DC5V |
| | 6 | DS1E-SL-DC6V | DS2E-SL-DC6V | DS4E-SL-DC6V |
| | 9 | DS1E-SL-DC9V | DS2E-SL-DC9V | DS4E-SL-DC9V |
| | 12 | DS1E-SL-DC12V | DS2E-SL-DC12V | DS4E-SL-DC12V |
| | 24 | DS1E-SL-DC24V | DS2E-SL-DC24V | DS4E-SL-DC24V |
| | 48 | DS1E-SL-DC48V | DS2E-SL-DC48V | DS4E-SL-DC48V |

2 coil latching

| | Nominal Voltage, V DC | Part No. | | |
|-----------------------|-----------------------|-----------------|-----------------|-----------------|
| | | 1 Form C | 2 Form C | 4 Form C |
| M (360 mW) type | 1.5 | DS1E-ML2-DC1.5V | DS2E-ML2-DC1.5V | DS4E-ML2-DC1.5V |
| | 3 | DS1E-ML2-DC3V | DS2E-ML2-DC3V | DS4E-ML2-DC3V |
| | 5 | DS1E-ML2-DC5V | DS2E-ML2-DC5V | DS4E-ML2-DC5V |
| | 6 | DS1E-ML2-DC6V | DS2E-ML2-DC6V | DS4E-ML2-DC6V |
| | 9 | DS1E-ML2-DC9V | DS2E-ML2-DC9V | DS4E-ML2-DC9V |
| | 12 | DS1E-ML2-DC12V | DS2E-ML2-DC12V | DS4E-ML2-DC12V |
| | 24 | DS1E-ML2-DC24V | DS2E-ML2-DC24V | DS4E-ML2-DC24V |
| S (180 mW) type | 1.5 | DS1E-SL2-DC1.5V | DS2E-SL2-DC1.5V | DS4E-SL2-DC1.5V |
| | 3 | DS1E-SL2-DC3V | DS2E-SL2-DC3V | DS4E-SL2-DC3V |
| | 5 | DS1E-SL2-DC5V | DS2E-SL2-DC5V | DS4E-SL2-DC5V |
| | 6 | DS1E-SL2-DC6V | DS2E-SL2-DC6V | DS4E-SL2-DC6V |
| | 9 | DS1E-SL2-DC9V | DS2E-SL2-DC9V | DS4E-SL2-DC9V |
| | 12 | DS1E-SL2-DC12V | DS2E-SL2-DC12V | DS4E-SL2-DC12V |
| | 24 | DS1E-SL2-DC24V | DS2E-SL2-DC24V | DS4E-SL2-DC24V |
| | 48 | DS1E-SL2-DC48V | DS2E-SL2-DC48V | DS4E-SL2-DC48V |

Notes:

1. Reverse polarity types available (add suffix-R).
2. Standard packing: carton: 50 pcs.; case: 500 pcs.

COIL DATA (at 20°C 68°F)**Single side stable**

| | Nominal voltage, V DC | Pick-up voltage, V DC (max.) | | Drop-out voltage, V DC (min.) | Coil resistance, Ω ($\pm 10\%$) | Maximum allowable, V DC (at 50°C 122°F) | |
|--------|-----------------------|------------------------------|-------------|-------------------------------|--|---|-------------|
| | | 1 Form C | 2, 4 Form C | | | 1 Form C | 2, 4 Form C |
| M type | 1.5 | 1.05 | 1.05 | 0.15 | 5.63 | 1.8 | 2.25 |
| | 3 | 2.1 | 2.1 | 0.3 | 22.5 | 3.6 | 4.5 |
| | 5 | 3.5 | 3.5 | 0.5 | 62.5 | 6 | 7.5 |
| | 6 | 4.2 | 4.2 | 0.6 | 90 | 7.2 | 9 |
| | 9 | 6.3 | 6.3 | 0.9 | 203 | 10.8 | 13.5 |
| | 12 | 8.4 | 8.4 | 1.2 | 360 | 14.4 | 18 |
| | 24 | 16.8 | 16.8 | 2.4 | 1440 | 28.8 | 36 |
| S type | 1.5 | 1.2 | 1.05 | 0.15 | 11.3 | 2.4 | 3 |
| | 3 | 2.4 | 2.1 | 0.3 | 45 | 4.8 | 6 |
| | 5 | 4.0 | 3.5 | 0.5 | 125 | 8.0 | 10 |
| | 6 | 4.8 | 4.2 | 0.6 | 180 | 9.6 | 12 |
| | 9 | 7.2 | 6.3 | 0.9 | 405 | 14.4 | 18 |
| | 12 | 9.6 | 8.4 | 1.2 | 720 | 19.2 | 24 |
| | 24 | 19.2 | 16.8 | 2.4 | 2880 | 28.4 | 48 |
| | 48 | 38.6 | 33.6 | 4.8 | 11520 | 76.8 | 96 |

1 coil latching

| | Nominal voltage, V DC | Reset Set, V DC (max.) | | Coil resistance, Ω ($\pm 10\%$) | Maximum allowable, V DC (at 50°C 122°F) | |
|--------|-----------------------|------------------------|-------------|--|---|-------------|
| | | 1 Form C | 2, 4 Form C | | 1 Form C | 2, 4 Form C |
| M type | 1.5 | 1.05 | 1.05 | 12.5 | 1.8 | 2.25 |
| | 3 | 2.1 | 2.1 | 50 | 3.6 | 4.5 |
| | 5 | 3.5 | 3.5 | 139 | 6 | 7.5 |
| | 6 | 4.2 | 4.2 | 200 | 7.2 | 9 |
| | 9 | 6.3 | 6.3 | 450 | 10.8 | 13.5 |
| | 12 | 8.4 | 8.4 | 800 | 14.4 | 18 |
| | 24 | 16.8 | 16.8 | 3200 | 28.8 | 36 |
| S type | 1.5 | 1.2 | 1.05 | 25 | 2.4 | 3 |
| | 3 | 2.4 | 2.1 | 100 | 4.8 | 6 |
| | 5 | 4.0 | 3.5 | 278 | 8.0 | 10 |
| | 6 | 4.8 | 4.2 | 400 | 9.6 | 12 |
| | 9 | 7.2 | 6.3 | 900 | 14.4 | 18 |
| | 12 | 9.6 | 8.4 | 1600 | 19.2 | 24 |
| | 24 | 19.2 | 16.8 | 6400 | 38.4 | 48 |
| | 48 | 38.4 | 33.6 | 25600 | 76.8 | 96 |


2 coil latching

| | Nominal voltage, V DC | Reset Set, V DC (max.) | | Coil resistance, Ω ($\pm 10\%$) | | Maximum allowable, V DC (at 50°C 122°F) | |
|--------|-----------------------|------------------------|-------------|--|---------|---|-------------|
| | | 1 Form C | 2, 4 Form C | Coil I | Coil II | 1 Form C | 2, 4 Form C |
| M type | 1.5 | 1.05 | 1.05 | 6.25 | | 1.8 | 2.25 |
| | 3 | 2.1 | 2.1 | 25 | | 3.6 | 4.5 |
| | 5 | 3.5 | 3.5 | 69.4 | | 6 | 7.5 |
| | 6 | 4.2 | 4.2 | 100 | | 7.2 | 9 |
| | 9 | 6.3 | 6.3 | 225 | | 10.8 | 13.5 |
| | 12 | 8.4 | 8.4 | 400 | | 14.4 | 18 |
| | 24 | 16.8 | 16.8 | 1600 | | 28.8 | 36 |
| S type | 1.5 | 1.2 | 1.05 | 12.5 | | 2.4 | 3 |
| | 3 | 2.4 | 2.1 | 50 | | 4.8 | 6 |
| | 5 | 4.0 | 3.5 | 139 | | 8.0 | 10 |
| | 6 | 4.8 | 4.2 | 200 | | 9.6 | 12 |
| | 9 | 7.2 | 6.3 | 450 | | 14.4 | 18 |
| | 12 | 9.6 | 8.4 | 800 | | 19.2 | 24 |
| | 24 | 19.2 | 16.8 | 3200 | | 38.4 | 48 |
| | 48 | 38.4 | 33.6 | 12800 | | 76.8 | 96 |

DIMENSIONS


1 Form C

Single side stable, 1 coil latching, 2 coil latching

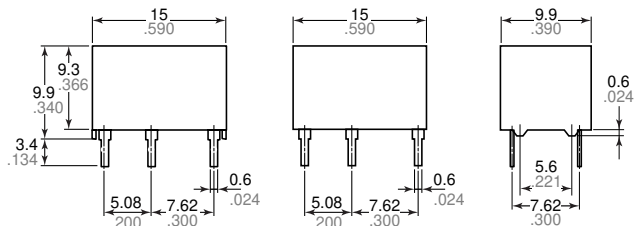


General tolerance: $\pm 0.3 \pm .012$

PC board pattern (Copper-side view)
Single side stable, 1 coil latching 2 coil latching

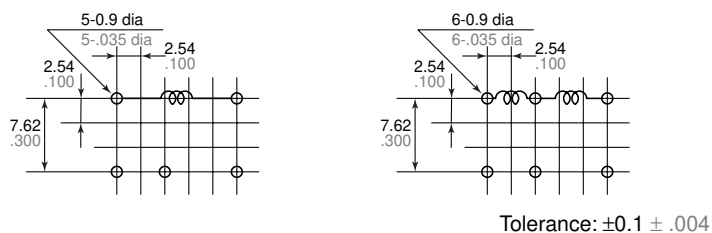

Schematic (Bottom view)
Single side stable
Deenergized condition



• A polarity bar showing the relay direction can replace the schematic.

1 coil latching




Diagram shows the "reset" position when terminals 1 and 6 are energized. Energize with reverse polarity to transfer contacts.

2 coil latching





Diagram shows the "reset" position when terminals 3 and 6 are energized. Energize terminals 1 and 3 to transfer contacts.


2 Form C

Single side stable, 1 coil latching, 2 coil latching

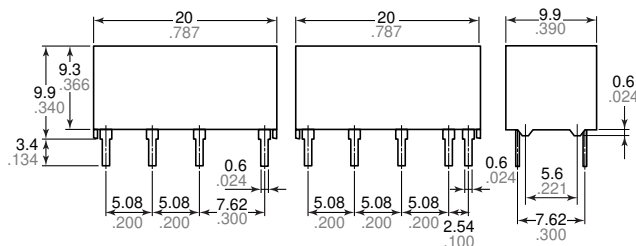


General tolerance: $\pm 0.3 \pm .012$

PC board pattern (Copper-side view)
Single side stable, 1 coil latching 2 coil latching

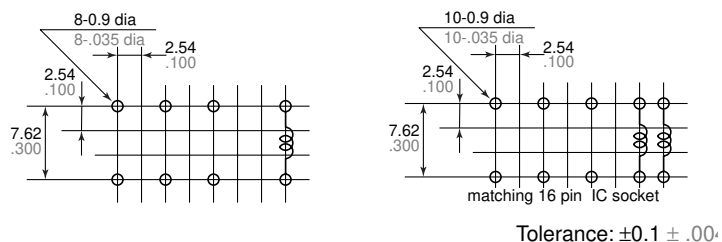

Schematic (Bottom view)
Single side stable
Deenergized condition



• A polarity bar showing the relay direction can replace the schematic.

1 coil latching




Diagram shows the "reset" position when terminals 1 and 16 are energized. Energize with reverse polarity to transfer contacts.

2 coil latching






Diagram shows the "reset" position when terminals 2 and 15 are energized. Energize terminals 1 and 16 to transfer contacts.

Single side stable, 1 coil latching, 2 coil latching

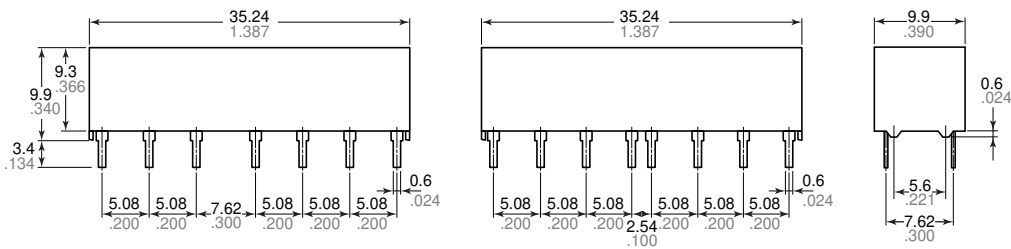


General tolerance: $\pm 0.3 \pm 0.12$

PC board pattern (Copper-side view)
Single side stable, 1 coil latching

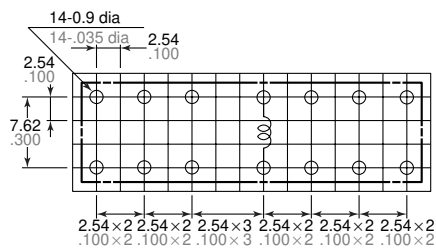


2 coil latching

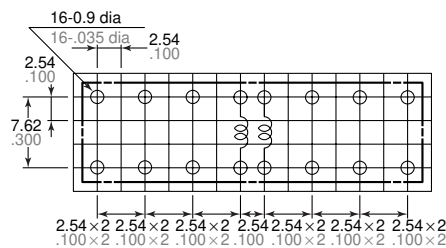

Tolerance: $\pm 0.1 \pm .004$

Schematic (Bottom view)
Single side stable
Deenergized condition



• A polarity bar showing the relay direction can replace the schematic.

1 coil latching




Diagram shows the "reset" position when terminals 1 and 16 are energized.
Energize with reverse polarity to transfer contacts.

2 coil latching






Diagram shows the "reset" position when terminals 2 and 15 are energized.
Energize terminals 1 and 16 to transfer contacts.

REFERENCE DATA

1. Maximum switching capacity

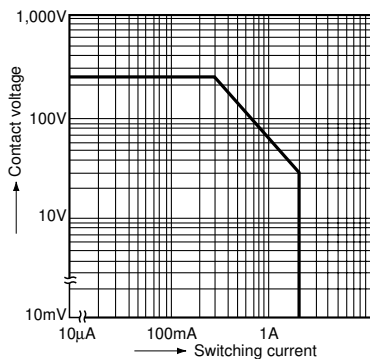


2. Life curve (Resistive load)

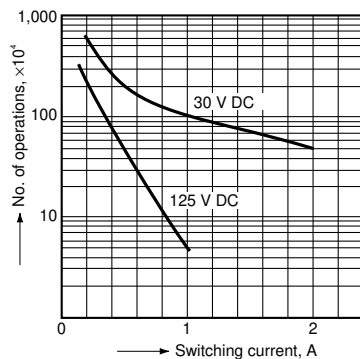

3. Contact reliability for AC loads

Sample: DS2E-M-DC24V 10 pcs.
Cycle rate: 20 cpm.
Detection level: 200 mΩ

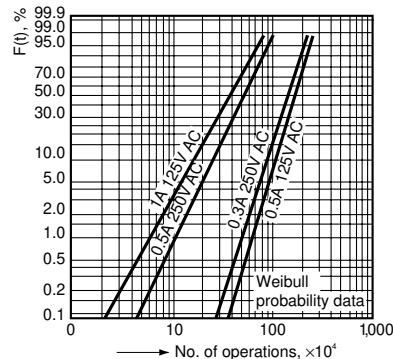


4-(1). Coil temperature rise

(2 Form C single side stable type)

Point measured: Inside the coil

Ambient temperature: 18° to 19°C 64° to 66°F

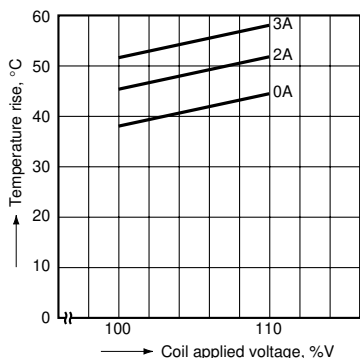


4-(2). Coil temperature rise

(4 Form C single side stable type)

Point measured: Inside the coil

Ambient temperature: 17° to 18°C 63° to 64°F

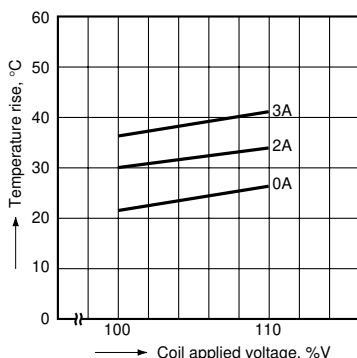


4-(3). Coil temperature rise

(2 Form C 2 coil latching type)

Point measured: Inside the coil

Ambient temperature: 20° to 21°C 68° to 70°F

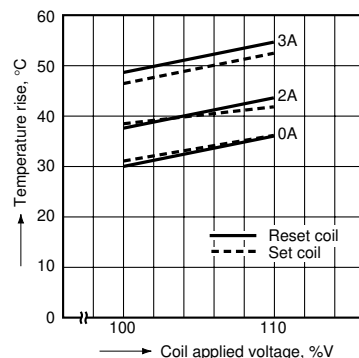


4-(4). Coil temperature rise

(4 Form C 2 coil latching type)

Point measured: Inside the coil


Ambient temperature: 20°C 68°F

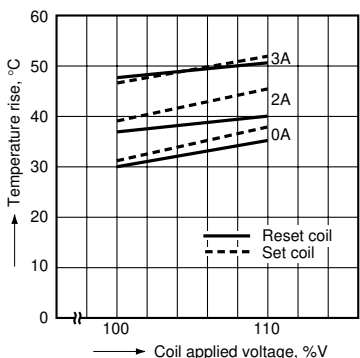

5. Operate and release time characteristics


(2 Form C single side stable type)

Test condition: Without diode connected to coil in parallel

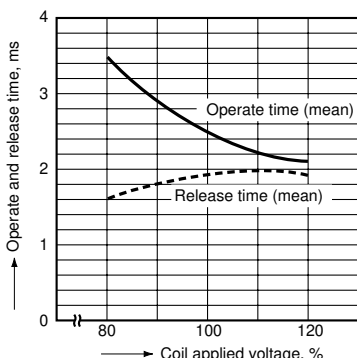


6-(1). Influence of adjacent mounting

(1 Form C)

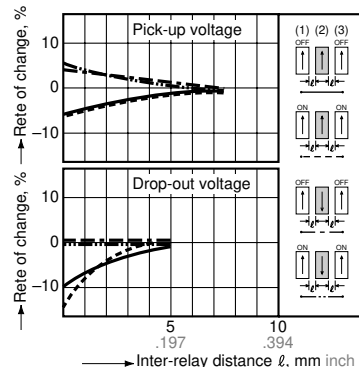



6-(2). Influence of adjacent mounting

(2 Form C)

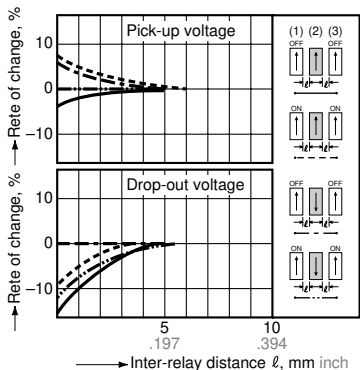

6-(3). Influence of adjacent mounting

(4 Form C)

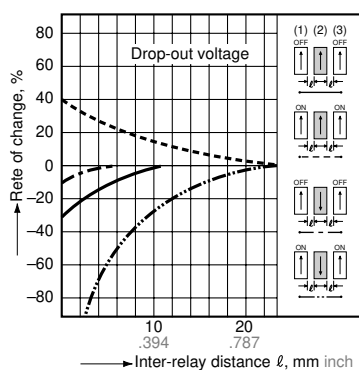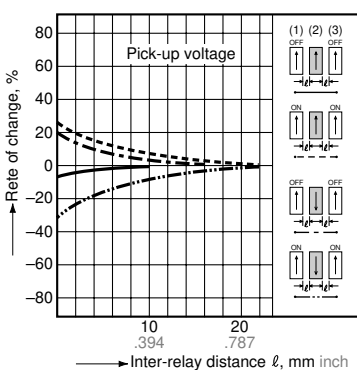

For Cautions for Use, see Relay Technical Information