



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# POWER

## Data Sheet

**Total Output Power:** 450 - 550 Watts  
+12 Vdc main Output  
+3.3 Vdc Stand-by Output  
DC Input 36 - 75 Vdc

### SPECIAL FEATURES


- 1U X 2U form factor
- 10.3 W/in<sup>3</sup> (DS550) 8.4 W/in<sup>3</sup> (DS450)
- +12 Vdc output
- +3.3 Vdc standby
- No minimum load required
- Hot plug operation
- N + 1 redundant
- Internal OR'ing fets
- Active current sharing
- Built-in cooling fans (40 mm x 28 mm)
- I<sup>2</sup>C communication interface bus
- EEPROM for FRU data
- Amber LED status, fan\_fail
- Green LED status, power good/DC\_OK status (VIN\_GOOD)
- One year warranty

### SAFETY

- UL/cUL 60950 (UL recognized)
- NEMKO+ CB report EN60950
- EN60950
- CE mark
- China CCC

## DS450DC-3/DS550DC-3

### Distributed Power Bulk Front-End

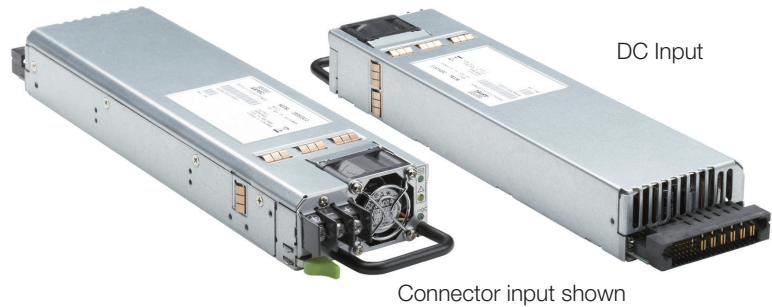

### Electrical Specifications

Input	
Input range	36 - 75 Vdc
Frequency	DC input
Inrush current	21 A maximum
Efficiency	84% @ 75 Vdc
Conducted EMI	FCC Subpart J EN55022 Class A
Radiated EMI	FCC Subpart J EN55022 Class A
Power factor	N/A
Leakage current	N/A No touch current required.
Hold up time	1 ms minimum
Output	
Main DC voltage	+12 V
Standby	+3.3 Vsb
Adjustment range	Factory Set, no pot adjustments
Regulation	+12 Vdc; +5%/-5% +3.3 Vsb; +5%/-5%
Overcurrent	See Table 1 next page
Overvoltage	+12 Vdc; 13.5 - 15 Vdc +3.3 Vsb; 3.76 - 4.30 Vdc
Undervoltage	+12 Vdc; 10.5 V - 11.0 V +3.3 Vsb; 2.77 - 3.00 Vdc
Turn-on delay	< 3 seconds
+12 V output rise time	3 ms - 300 ms

## Logic Control

PS_ON /L(Power supply enable)	The power supply output will be enabled when this signal is pulled low (< 0.8 V). HIGH = Output V1 OFF LOW = Output V1 ON
VIN_GOOD/H (Input OK)	Active High signal asserted when the input voltage rises above the min input voltage specified. This signal is internally pulled up through 4.7 K ohms to the 3.3 V housekeeping voltage.
POK/H (Output OK)	Active High signal asserted when the output is within regulation. This signal is internally pulled up through 1.0 K ohms to the 3.3 V housekeeping voltage.
TACH_1	This open collector signal generates two pulses per each fan revolution. This signal is eternally pulled up to the housekeeping voltage.
PS_KILL	This signal will cause the output to shut down when drive high (> 24 V) or left floating. The PS_KILL will cause the output to latch off and requires recycle of PS_ON or DC input to reset.

## Environmental Specifications

Operating temperature	+10 °C to +45 °C, able to start-up at -10 °C
Storage temperature	-40 °C to +70 °C
Altitude, operating	10,000 ft.
Electromagnetic susceptibility/Input transients	- EN61000-3-2, -3-3 - EN61000-4-2, 4.3, 4-4, -4-5, 4-11 - EN55024:1998
RoHS & lead-free compliant (no tantalum caps.)	
Humidity	20 to 90% RH, non-condensing
Shock and vibration specifications complies with Astec Std. Specifications.	
MTBF (calculated)	500k hours at full load, 25 °C


## Ordering Information

Output	Nominal Output Voltage Set Point	Set Point Tolerance	Total Regulation	Minimum Current	Maximum Current	Output Ripple P/P	Over Current	Options
DS450DC-3	12.0 Vdc 3.3 Vsb	± 0.2% ± 1%	+5/-3% +5/-4%	0 A 0 A	37.0 A 3.0 A	120 mV 60 mV	39.5 - 44.4% 4.9 A Avg, 7 A max	Standard
DS450DC-3-002	12.0 Vdc 3.3 Vsb	± 0.2% ± 1%	+5/-3% +5/-4%	0 A 0 A	37.0 A 3.0 A	120 mV 60 mV	39.5 - 44.4% 4.9 A Avg, 7 A max	Reverse Air
DS550DC-3	12.0 Vdc 3.3 Vsb	± 0.2% ± 1%	+5/-3% +5/-4%	0 A 0 A	45.0 A 3.0 A	120 mV 60 mV	48.0A - 54.0A 4.9 A Avg, 7 A max	Standard
DS550DC-3-003	12.0 Vdc 3.3 Vsb	± 0.2% ± 1%	+5/-3% +5/-4%	0 A 0 A	45.0 A 3.0 A	120 mV 60 mV	48.0A - 54.0A 4.9 A Avg, 7 A max	Reverse Air

\*Over current latches off if overcurrent lasts over 1 second, otherwise it is auto recovery.

\*For 5 Vsb, please contact marketing department.

Mechanical Drawing

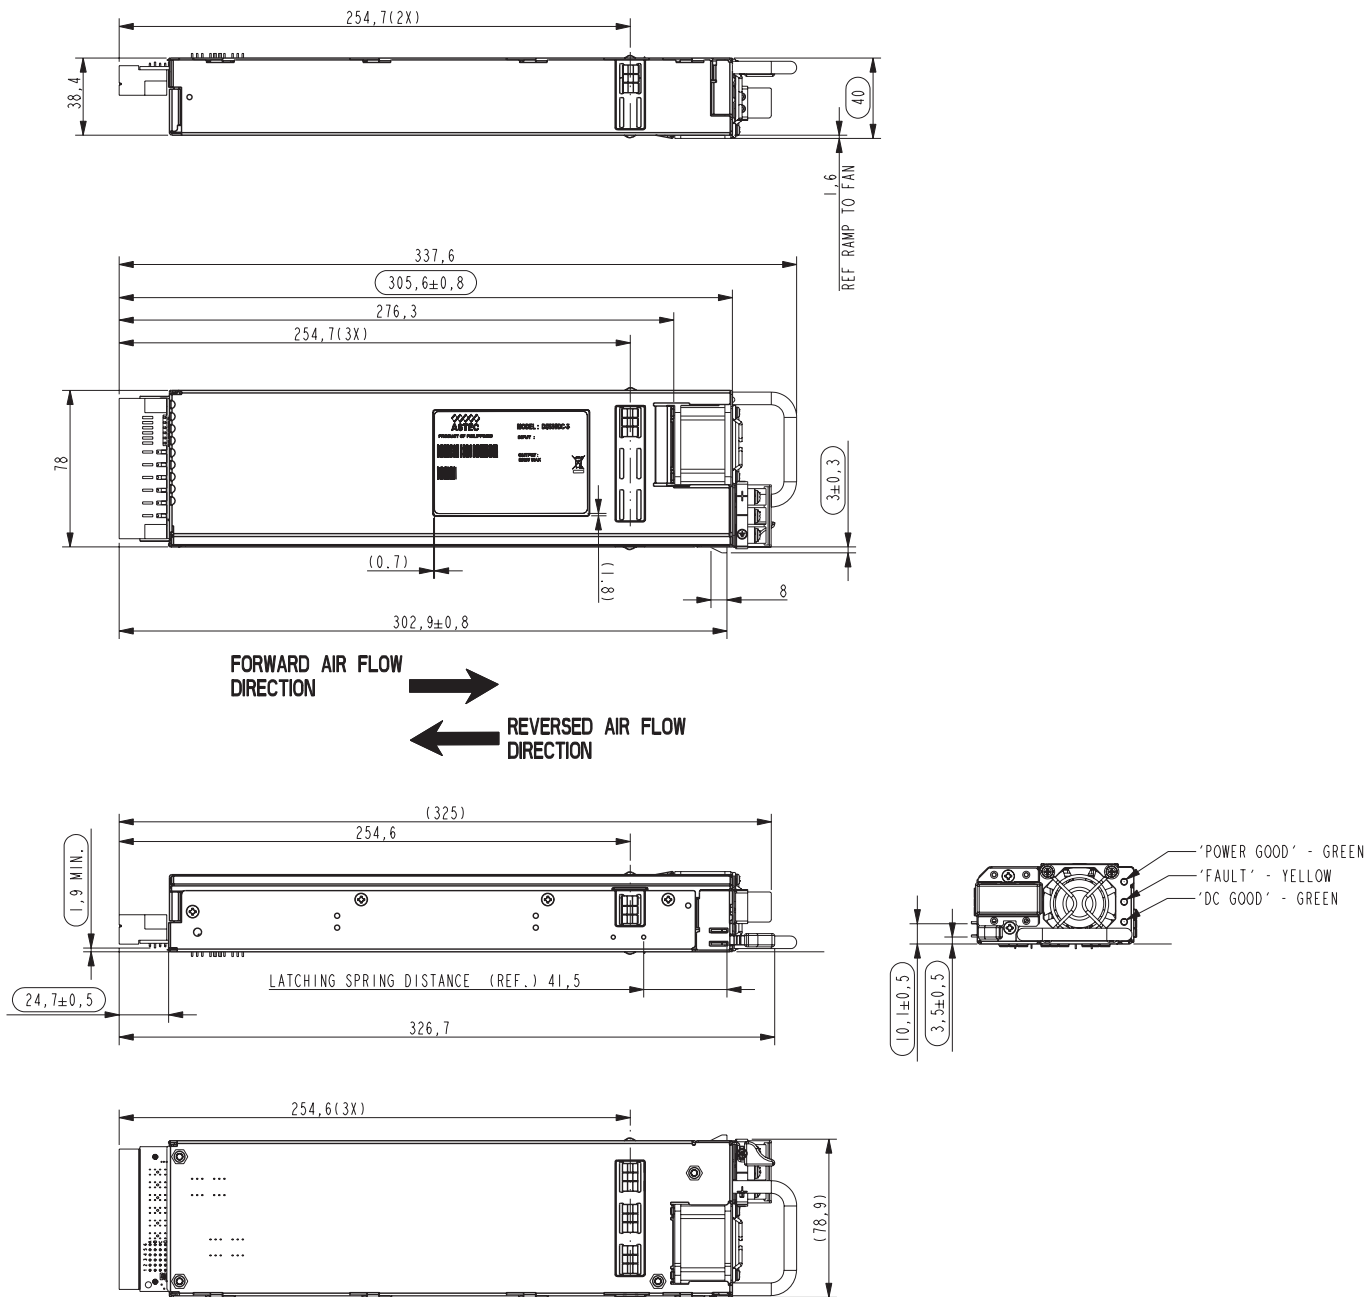

### DC Output Connector Pinout Assignment

Male connector as viewed from the rear of the supply:

D1	D2	D3	D4	D5	D6	PB1	PB2	PB3	PB4	PB5	PB6
C1	C2	C3	C4	C5	C6						
B1	B2	B3	B4	B5	B6						
A1	A2	A3	A4	A5	A6						

### P1 - Power Supply Side

1	FCI Power Blade 51721 series 51721-10002406AA
2	Molex Power Connector SD-87667 series 87667-7002

### Mating Connector (System Side)

1	FCI Power Blade 51741-10002406CC Strait Pins
2	FCI Power Blade 51761-10002406AA Right Angle

### Pin Assignments

Pin	Signal Name
PB 1	+12 V Return
PB 2	+12 V Return
PB 3	+12 V Return
PB 4	+12 V
PB 5	+12 V
PB 6	+12 V
A1	PS_KILL
A2	+12 V_Current Share
A3	Return
A4	Write Protect
A5	PS A0
A6	+3.3 V SB
B1	Return
B2	12 V RTN Sense
B3	Return
B4	+3.3 V SB
B5	SDA
B6	-PS_ON/L

### Pin Assignments

Pin	Signal Name
C1	Return
C2	Tach_1
C3	Return
C4	+3.3 V SB
C5	SCL*
C6	VIN_GOOD/H
D1	-Present/L
D2	+12 V_Sense
D3	Return
D4	+3.3 V SB
D5	Alert/L (S_INT)
D6	POK/H (PWROK/H)

\*Supports I<sup>2</sup>C standard mode (100 kHz) only

## WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333



www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)