



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



20 A Redundancy Module

- Ultra Slim Design
- 24 V Redundant Operation
- DIN Rail TS35 / 7.5 or 15 Installation
- Relay Contact Signal Output & Failure Alarm LED Indicator
- 3 Year Warranty






Dimensions:

DSA-DP20:
3.92 x 4.92 x 2.18" (99.8 x 125.2 x 55.5 mm)

Models & Ratings

Input Voltage Range	Input Current	Output Current	Model Number
21-28 V	20 A per input	20 A	DSA-DP20

Mechanical Details

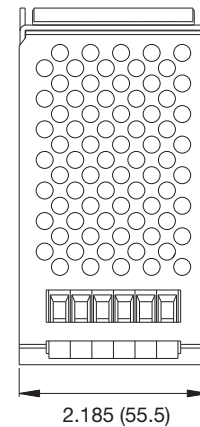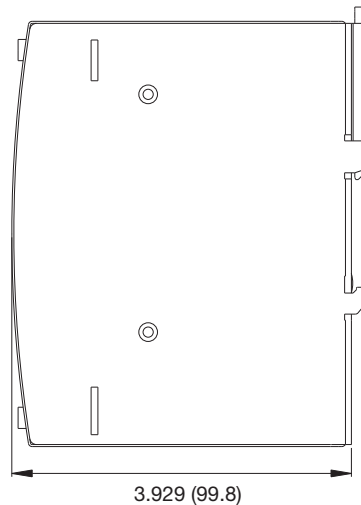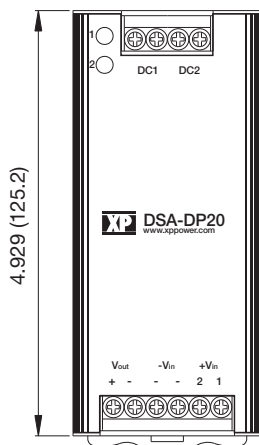

Pin Connector		
Conn	Pin	Designation
Vin/ Vout	1	+Vout
	2	-Vout
	3	-Vin
	4	-Vin
	5	Vin 2+
	6	Vin 1+
Alarm	1	DC1
	2	DC1
	3	DC2
	4	DC2

Input

	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage Range	21		28	VDC	
Number of Inputs					2 inputs
Input Current			20	A	Per input

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Reverse Voltage			30	VDC	
Output Current			20	A	
Output Voltage Drop			0.5	VDC	
LED Indicators	A green LED per input indicates voltage present				

Signals

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage Alarm	Relay contact per input to indicate voltage present. Contacts are closed if voltage is < 20V or > 30V (±5%)				
Relay Contact Rating			30 / 1	VDC / A	

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Isolation Voltage	500			VAC	Chassis to input
	500			VDC	Chassis to output
	500			VDC	Chassis to alarm contacts
Isolation Resistance	100			MΩ	Chassis to terminals at 500VDC, 25 °C & 70% RH

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-20		+70	°C	See derating curve in Application Notes
Storage Temperature	-40		+85	°C	
Operating Humidity	10		95	%RH	Non-condensing
Vibration	10 ~ 500 Hz, 2 g 10min. / cycle, period for 60min. each along X, Y, Z axes; Certified IEC 60068-2-6				

EMC: Emissions


Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Radiated	EN55022	Class B		

EMC: Immunity


Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Immunity	EN61204-3			
ESD Immunity	EN61000-4-2	2	A	
Radiated Immunity	EN61000-4-3	3 V/m	A	
EFT/Burst	EN61000-4-4	1	A	
Surges	EN61000-4-5	1	A	
Conducted	EN61000-4-6	3 Vm	A	
Magnetic Fields	EN61000-4-8	1 A/m	A	

Application Notes


1+1 Redundancy



N+1 Redundancy

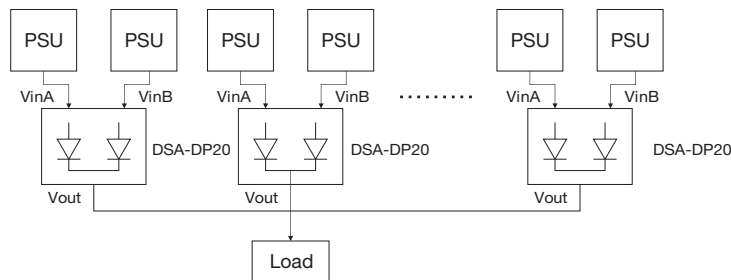

Derating Curves

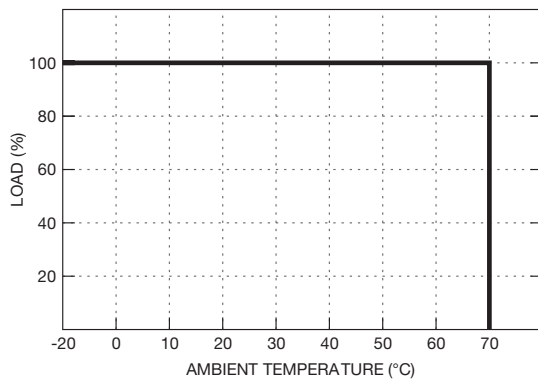

Block Diagram

