



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




DSC-5300

50 MHz DIGITAL STORAGE OSCILLOSCOPE

Applications

The DSC-5300 Series Signal Generators are ideally suited for applications where value and quality are equally important such as for:

- Educational labs
- Technical schools
- Internal training facilities
- Hobbyists

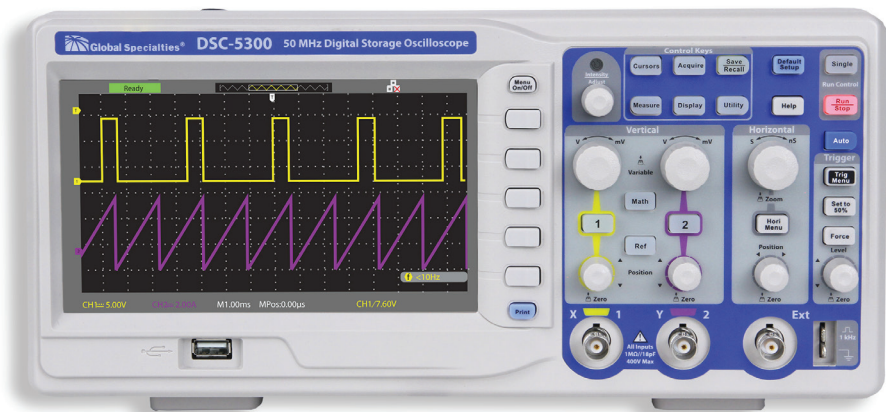

Overview

The Global Specialties DSC-5300 digital storage oscilloscope (DSO) is a portable benchtop instrument used for making measurements of signals and waveforms. The oscilloscope's bandwidth is capable of capturing up to 50 MHz signals with a real time sampling rate of up to 500 MSa/s. With up to 32 kpts of deep memory, it allows for capturing more details of a signal for analysis and display on the large color LCD display.

Features

- **Bandwidth: 50 MHz**
- **Single channel real-time sampling rate of up to 500 MSa/s**
- **32k points of memory depth**
- **7" Color TFT LCD display**
- **Trigger types: Edge, Pulse, Video, Slope and Alternative**
- **Auto measure 32 parameters (Voltage and Time)**
- **On board help menu**
- **Interface Options: USB, LAN, RS-232, Pass/Fail**

Specifications:

All specification applies to 10X probe and All the DSC-5300 Digital Storage Oscilloscope.

To verify that the oscilloscope meets specifications, the oscilloscope must first meet the following conditions:

- The oscilloscope must have been operating continuously for thirty minutes within the specified operating temperature.
- You must perform the Do Self Cal operation, accessible through the Utility menu, if the operating temperature changes by more than 5° C.
- The oscilloscope must be within the factory calibration interval

All specifications are established unless noted “typical.”

Inputs	
Input Coupling	AC, DC, GND
Input Impedance	$1M\ \Omega \pm 2\%$ $16Pf \pm 3Pf$,
Maximum Input voltage	400V (DC+AC PK-PK, $1M\ \Omega$ input impedance, X10) , CAT I
Ch to Ch Isolation (Both channels in same V/div setting)	>100:1 at 25MHz
Probe Attenuator	1X,10X
Probe Attenuator Factors Set	1X,5X,10X,50X,100X, 500X,1000X

Vertical System	
Vertical Sensitivity	2mV/div -10V/div(1-2-5 order)
Channel Voltage Offset Range	2mV –200mV: $\pm 1.6V$ 206mV - 10V: $\pm 40V$
Vertical Resolution	8 bit
Channels	2

Bandwidth	50MHz
Single-shot Bandwidth	50MHz
BW Flatness at BNC input	DC -10% of rated BW: +/- 1dB 10% - 50% of rated BW: +/- 2dB 50% - 100% of rated BW: + 2dB/-3dB
Lower frequency limit (AC -3dB)	≤10Hz(at input BNC)
Noise: Pk-Pk for 3K record	≤0.6 Div for average of 10 Pk-Pk readings, Fixed gain settings ≤0.7 Div for average of 10 Pk-Pk readings, Variable gain settings
SFDR including harmonics (measured with FFT)	>=35dB
DC Gain Accuracy	< ± 3.0%: 5mv/div to 10V/div in Fixed Gain Ranges < ± 4.0%: 2mv/div Variable Gain Ranges
DC Measurement Accuracy: All Gain settings ≤ 100mv/div	± [3%* (reading + offset) +1% *of offset +0.2div+2mv]
DC Measurement Accuracy: All Gain settings > 100mv/div	± [3%* (reading + offset) +1%* of offset +0.2div+100mv]
Rise time	<14ns
Overshoot, Typical (using 500ps pulse)	<10% with probe or BNC input w/ 50 Ohm feed thru
Ch to Ch Skew (both channels in same V/div setting)	<4ns (Equivalent to 2 minor divisions in smallest t/div)
Math operation	+, -, *, /, FFT

FFT	Window mode: Hanning, Hamming, Blackman, Rectangular
	Sampling points: 1024
Bandwidth limited	20MHz \pm 40% (Note: BW limited below 20MHz when using probe in x1)

Horizontal System	
Real Time Sampling Rate	SingleChannel:500MSa/s,Double Channel: 250MSa/s(When timebase faster than 250ns/div)
Equivalent Sampling Rate	50GSa/s (SDS1022DL:10GSa/s)
Measure Display Modes	MAIN, WINDOW, WINDOW ZOOM, ROLL, X-Y
Timebase Accuracy	\pm 100ppm measured over 1ms interval
Horizontal Scan Range	1/2.5/5/25nS/DIV - 50S/DIV (According to the Bandwidth)
	Scan: 100mS/DIV \sim 50S/DIV (1-2.5-5 sequence)

Trigger System	
Trigger Types	Edge, Pulse Width, Video, Slope, Alternative
Trigger Source	CH1,CH2,EXT,EXT/5,AC Line
Trigger Modes	Auto, Normal, Single
Trigger Coupling	AC, DC, LF rej, HF rej
Trigger Level Range	CH1,CH2: \pm 6divisions from center of screen
	EXT: \pm 1.2V
	EXT/5: \pm 6V
Trigger Displacement	Pre-trigger: (Memory depth/ (2*sampling)) , Delay Trigger: 271.04DIV
Trigger Level Accuracy (typical) applicable for the signal of rising and falling time \geq 20ns	Internal: \pm (0.2 div \times V/div)(within \pm 4 divisions from center of screen) EXT: \pm (6% of setting + 40 mV) EXT/5: \pm (6% of setting + 200 mV)
Trigger Sensitivity	For fixed gain ranges 1 Divisions: DC-10MHz 1.5 Divisions: 10MHz - Max BW
	EXT: 200mVpp DC-10MHz, 300mVpp 10MHz - Max BW
	EXT/5: 1Vpp DC-10MHz, 1.5Vpp 10MHz - Max BW
Pulse Width Trigger	Trigger Modes: (>, <, =)positive Pulse Width, (>, <, =)Negative Pulse Width
	Pulse Width Range: 20ns – 10s

Video Trigger	Support signal Formats: PAL/SECAM, NTSC
	Trigger condition : odd field, even field, all lines, line Num
Slope Trigger	(>,< , =) Positive slope, (>,< , =) Negative slope
	Time: 20ns-10s
Alternative Trigger	CH1 trigger type: Edge, Pulse, Video, Slope
	CH2 trigger type: Edge, Pulse, Video, Slope

X-Y Mode	
X-pole Input / Y-Pole Input	Channel 1 (CH1) / Channel 2 (CH2)
Sample Frequency	XY mode has a breakthrough that trad oscilloscopes restrict sampling rate at 1MSa/s. Support 25Ksa/s~250Msa/s adjusted.

Hard Ware Frequency Counter	
Reading resolution	1Hz
Accuracy	±0.01%
Range	DC Couple, 10Hz to MAX Bandwidth
Signal Types	Satisfying all Trigger signals(Except Pulse width trigger and Video Trigger)

Control Panel Function	
Auto Set	Auto adjusting the Vertical, Horizontal system and Trigger Position
Save/Recall	Support 2 Group referenced Waveforms, 20 Group setups, 20 Group captured Waveforms internal Storage/Recall function and USB flash driver storage function.

Measure System	
Auto Measure (32 Types)	Vpp, Vmax, Vmin, Vamp, Vtop, Vbase, Vavg, Mean, Crms, Vrms, ROVShoot, FOVShoot, RPRESshoot, FPRESshoot, Rise time, Fall time, Freq, Period, +Wid, -Wid, +Dut, -Dut, BWid, Phase, FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF
Cursor Measure	Manual mode, Track mode and Auto mode

General Specifications:

Display System	
Display Mode	Color TFT 7.0in.(177.8mm)diagonal Liquid Crystal Display
Resolution	480 horizontal by 234 vertical pixels
Display Color	24bit
Display Contrast (Typical state)	150:1
Backlight Intensity (Typical state)	300nit
Wave display range	8 x 18 div
Wave Display Mode	Dots, Vector
Persist	Off, 1 sec, 2 sec, 5 sec, Infinite
Menu Display	2 sec, 5 sec, 10 sec, 20 sec, Infinite
Screen-Saver	Off, 1min, 2min, 5min, 10min, 15min, 30min, 1hour, 2hour, 5hour
Skin	Classical, Modern, Tradition, Succinct
waveform interpolation	Sin(x)/x, Linear
Color model	Normal , Invert
Language	Simplified Chinese, Traditional Chinese, English, Arabic, French, German, Russian, Portuguese Spanish, Japanese, Korean, Italian

Environments	
Temperature	Operating: 10°C to +40°C Not operating: -20°C to +60°C
Cooling	The fan forces it cold.
Humidity	Operating: 85%RH, 40°C, 24 hours Not operating: 85%RH, 65°C, 24 hours
Height	Operating: 3000m Not operating: 15,266m

Power Supply	
Input Voltage	100-240 VAC, CAT II, Auto selection
Frequency Scope	45Hz to 440Hz
Power	50VA Max

Mechanical		
Dimension	length	323.1mm
	Width	135.6mm
	Height	157mm
weight	2.5kg	

Standard Accessories:

- 1:1/10:1 probe (2 PCS)
- Power Cable
- Quick Start Guide
- USB Cable