



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DSP1 SERIES

DUAL OUTPUT

DESCRIPTION

The DSP1 Series is specifically designed to convert a nominal 5 volt input into two isolated output voltages. The dual semi-regulated output voltages are designed to allow analog circuits and three terminal regulators to operate within their most efficient input voltage range. This series achieves high power densities through the use of 350KHz fixed frequency switching converters.

Selection Chart					
Model	Input Range VDC		Output VDC	Output mA	Power W
	Min	Max			
DSP1N5D5	4.5	5.5	±5	±75	0.75
DSP1N5D7	4.5	5.5	±7	±70	1
DSP1N5D12	4.5	5.5	±12	±40	1
DSP1N5D14	4.5	5.5	±14	±35	1
DSP1N5D15	4.5	5.5	±15	±33	1
DSP1N5D17	4.5	5.5	±17	±30	1


General Specifications (1)				
All Models				Units
Isolation				
Isolation Voltage	MIN	500		VDC
Input to Output Capacitance	TYP	10		pF
Environmental				
Case Operating Range, Tc (2)	MIN MAX	-40 +85		° C
Storage Range	MIN MAX	-55 105		° C
Line Regulation	TYP	1		%
Load Regulation 20% to 100% Load	TYP	5		%
General				
MTBF (Calculated)	TYP	700,000		HRS
Unit Weight	TYP	0.1/28		oz/gm
Case Material	Non Conductive Plastic			

NOTES

- (1) All parameters measured at Tc=25 °C case temperature, nominal input voltage and full rated load unless otherwise noted.
 (2) Derate output power linearly to 0.6 watts from 70°C to 85°C.

FEATURES

- Up to 1 Watt Unregulated Output Power
- Single In Line Package
- Four Terminal Operation
- Efficiencies to 70%
- Output Voltages: 5V, 7V, 12V, 14V, 15V, 17V
- 700V Isolation
- -40°C to +85°C Operation

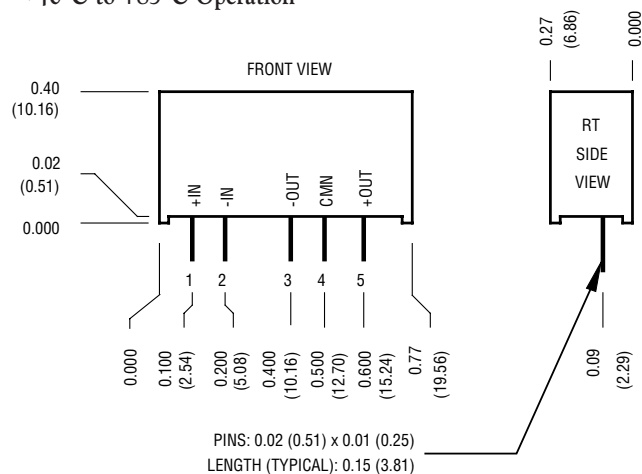

Mechanical tolerances unless otherwise noted:

X.XX dimensions: ±0.020 inches

X.XXX dimensions: ±0.010 inches

Pin	Function
1	+INPUT
2	-INPUT
3	-OUT
4	COMMON
5	+OUT

DSP1 SERIES APPLICATION NOTES:



External Capacitance Requirements

Output filtering is required for operation. A minimum of 10µF is specified for optimal performance. Output capacitance may be increased for additional filtering, and should not exceed 400µF. To meet the reflected ripple requirements of the converter, an input impedance of less than 0.5 Ohms from DC to 350KHz is required. If a capacitive input source is farther than 2" from the converter, it is recommended to use a 10µF, 25V solid tantalum capacitor.





Regulation

This converter uses a semi-regulated design. The output will vary as the load is changed, with output decreasing with increasing load. Additionally, output voltage will change in proportion to a change in input voltage. The typical output voltage will change 1% for each 1% change in input voltage.

DSP1 SERIES – DUAL OUTPUT

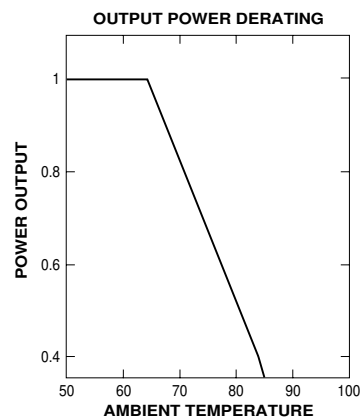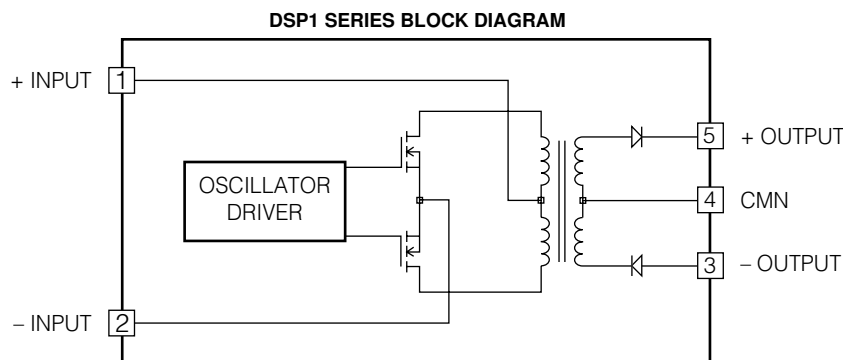

Typical Performance: (Tc=25°C)

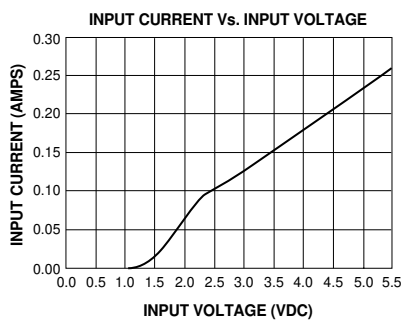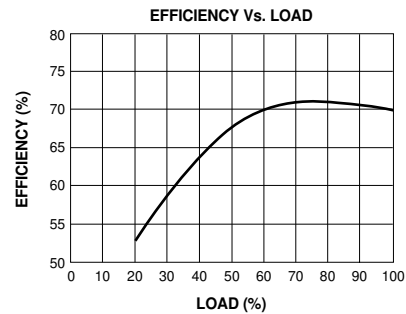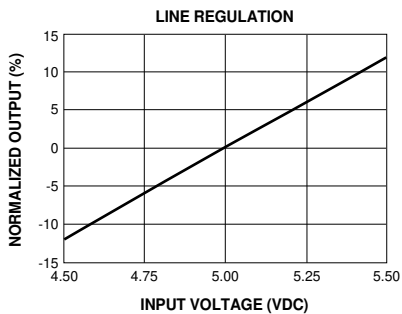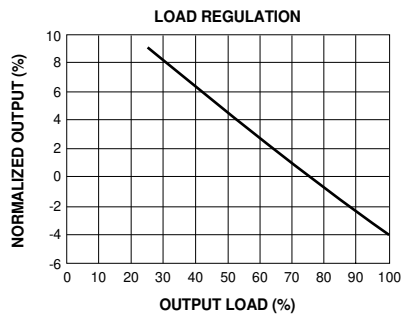

For the Most Up-To-Date Information

www.power-one.com

24 Hours/Day—7 Days/Week



NUCLEAR AND MEDICAL APPLICATIONS Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the President of Power-One, Inc.

TECHNICAL REVISIONS The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.