



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Installation Instructions for the SURSENSE® Ultra Low Pressure Sensors

ISSUE 2

PK 80164

DUXL Series

⚠ WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

GENERAL INFORMATION


The DUXL Series sensors provide a ratiometric mV output and are housed in a low profile miniature ported package. These sensors are intended for applications where customized external signal conditioning is required or available from other sources. The low profile outline is ideal for portable applications where small size is critical.

Product is patented by US patent 6023978.

SOLDERING/ASSEMBLY

Limit soldering to 315 °C [600 °F] maximum, with duration of five seconds maximum. Leads must be adequately supported during any forming/shearing operation to ensure that the leads are not stressed inside the plastic case.

EQUIVALENT CIRCUIT



PIN DESIGNATIONS

1. -V Supply
2. +V Output
3. +V Supply
4. -V Output


ELECTRICAL SPECIFICATIONS

@ 25 °C, 4.5 VDC (UNLESS OTHERWISE NOTED)

Pressure Range	0 in H ₂ O [0 mBar] to 1 in H ₂ O [2,50 mBar]
	0 in H ₂ O [0 mBar] to 5 in H ₂ O [12,50 mBar]
	0 in H ₂ O [0 mBar] to 10 in H ₂ O [25,0 mBar]
	0 in H ₂ O [0 mBar] to 0 20 in H ₂ O [50,0 mBar]
	0 in H ₂ O [0 mBar] to 30 in H ₂ O [75,0 mBar]
Offset	0 ±10 mV
Span (P2>P1)	
0 in H ₂ O to 1 in H ₂ O	6.0 ±2 mV
0 in H ₂ O to 5 in H ₂ O	22.5 ±7.5 mV
0 in H ₂ O to 10 in H ₂ O	30 ±15 mV
0 in H ₂ O to 20 in H ₂ O	30 ±15 mV
0 in H ₂ O to 30 in H ₂ O	30 ±15 mV
Supply Voltage	3.0 Vdc min., 8.0 Vdc max.

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-25 °C to 85 °C [-13 °F to 185 °F]
Storage Temperature	-40 °C to 125 °C [-40 °F to 257 °F]
Hysteresis and Linearity	0.1% Span, Typ.
Media Compatibility	P1 Port (Dry Gases Only): Media must be compatible with epoxy-based adhesive. P2 Port: Media must be compatible with nylon housing, epoxy adhesive and silicon.

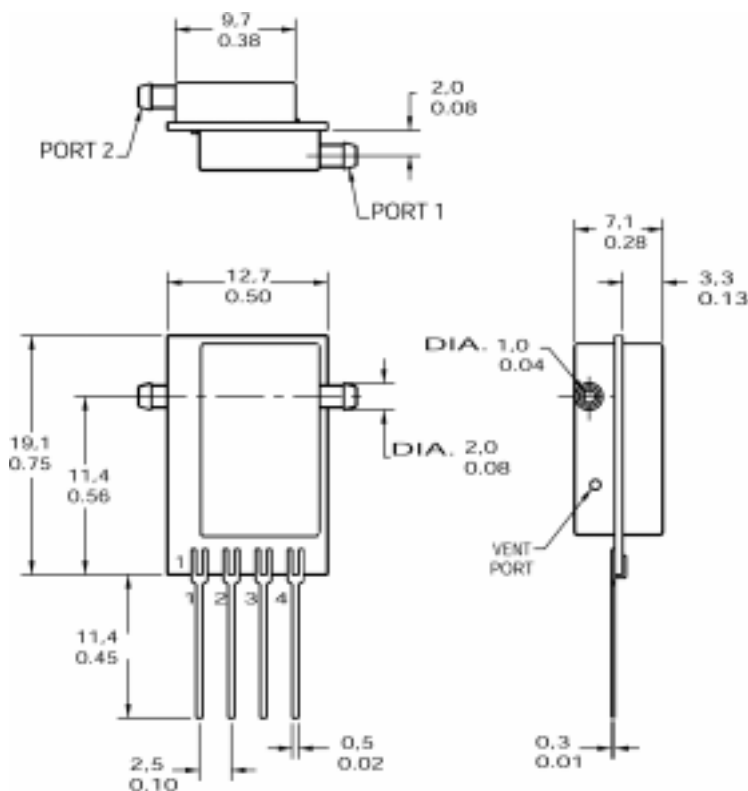MOUNTING DIMENSIONS (for reference only) mm/in**WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is **in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.**

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

For application assistance, current specifications, or name of the nearest Authorized Distributor, contact a nearby sales office. Or call:

1-800-537-6945 USA

1-800-737-3360 Canada

1-815-235-6847 International

FAX

1-815-235-6545 USA

INTERNET

www.honeywell.com/sensing

info.sc@honeywell.com

Honeywell

Sensing and Control

Honeywell

11 West Spring Street

Freeport, Illinois 61032

P80164-2-EN IL50 GLO 303 Printed in USA

www.honeywell.com/sensing