

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	TAB SIZE	WIRE RANGE AWG	COLOR	MAX. INSUL.	DIMENSIONS in.		
FART NOMBER					A ±.03	B *.01	C *.01
DV10-250	.250 X .032	12-10	YELLOW	.229 (5.82)	1.03 (26.16)	.30 (7.62)	.13 (3.30)

NOTES:

- 1. UL RECOGNIZED AND CSA CERTIFIED FOR:
 - A. 600V MAX VOLTAGE RATING
 - B. 194°F (90°C) MAX TEMP RATING
 - C. STRANDED COPPER WIRE ONLY
 D. 6-12 LBS INITIAL INSERTION/WITHDRAWAL FORCE
- 2. MATERIAL:
 - A. STAMPING-BRASS, TIN PLATED
 - B. HOUSING-VINYL
 - C. SLEEVE-BRASS, TIN PLATED
- 3. DIMENSIONS IN BRACKETS ARE IN mm OR mm²
- 4. INSTALLATION TOOLS: UL/CSA: CT-550, CT-1551,

C1-133(


PANDUIT RECOMMENDED: CT-100 CT-160


CT-260

5. PACKAGE QTY: -L=50 CT-460

-D=500

6. WIRE STRIP LENGTH: 9/32 +1/32 (7.1 +.8 -0)

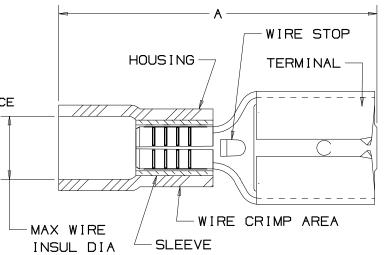




CERTIFIED LR31212

RECOGNIZED E78522

TINLEY PARK, ILLINOIS

06	6/06	DAW	DAW	REMOVED MAX. AMPERAGE NOTE					
5	7/03	KLFU	SKB	ADDED INTERNAL SERRATIONS	12453	SKB	TRO		
04	1/01	KMD	SKB	CAD FILE SPEC. WAS N41199AA_PCD_03	8938	JAC	ССН		<u> </u>
03	5/99	JKD		ADDED CT-1551 & CT-1550 TOOLS	07642			FEMA	ιLΕ
0	3/95	MS	RLS	UPDATED NOTES AND DIMENSIONS	03048	LA	JB		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	РМ	FES	CHK



FEMALE DISCONNECTS, VINYL INSULATED .250 X .032

RLS | SCALE | DRAWING NO. | A41199