



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DVP-7642E/7651E

8/16-ch H.264 PCIe Video Capture Card with SDK

NEW

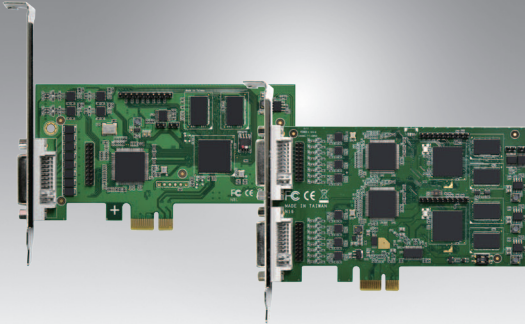

DVP-7642E

DVP-7651E

Features

- 8/16-channel composite video inputs with H.264 hardware compression
- 30/25fps (NTSC/PAL) at up to 4CIF resolution for each channel of display
- 30/25 fps (NTSC/PAL) at up to 4CIF / D1+CIF dual stream resolution for each channel of recording
- PCIe x 1 host interface
- Supports Watchdog function
- Windows/Linux OS supported



Introduction

DVP-7642E/DVP-7651E is a PCIe-bus, hardware compression video capture card with 8/16 analog video and 8/16 audio inputs. DVP-7642E/DVP-7651E series support H.264 compression format at up to 4CIF resolution at real-time frame rate (30/25fps) for each channel. With an easy-to-use software development kit (SDK) and flexibility to stack multiple cards, DVP-7642E/DVP-7651E series are ideal solutions for various video capture applications or video surveillance.

Specifications

Video	Video Standard	Composite for NTSC/PAL
	Video Input	8/16 x BNC connectors
	Compression	H/W H.264 Main Profile
	Max. Display Rate	30/25 fps (NTSC/PAL) @ 4CIF
	Max. Recording Rate	30/25 fps (NTSC/PAL) @ 4CIF+CIF dual stream/ch
Audio	Audio Input	8/16 x RCA
	Format	MONO/16 bits/8000HZ ~16000HZ
System Requirements	CPU (Display)	Intel Core 2 Duo E2200 2.2 GH
	CPU (Recording)	Intel Core 2 Duo E2200 2.2 GH
	Memory	2 GB
	VGA	1024 x 768, DirectX 9.0c
	Operating System	Windows XP/XPe/Vista/7; Linux 2.6.14 or higher; 32/64 bits
Physical Characteristics	Host Interface	PCIe x 1
	Operating Temperature	-20 ~ 70° C (-4 ~ 158° F)
	Storing Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Dimensions	DVP-7642E: 122 x 69mm DVP-7651E: 132 x 85mm
	Safety	CE/FCC


Versatile SDK Support (For Windows Only)

Advantech provides software development kit (SDK), a set of development tools that allows a software engineer to integrate video capture modules into different types of system. Functions include video recording, playback and instant preview.


- Software Library
- SDK Manual
- Sample Program

Connection Diagram

DVP-7642E

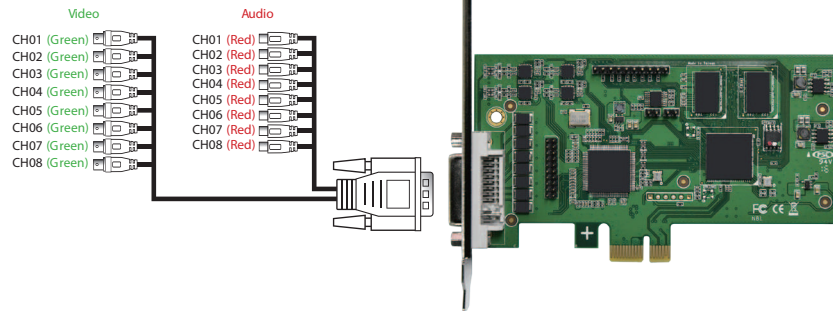

DVP-7651E

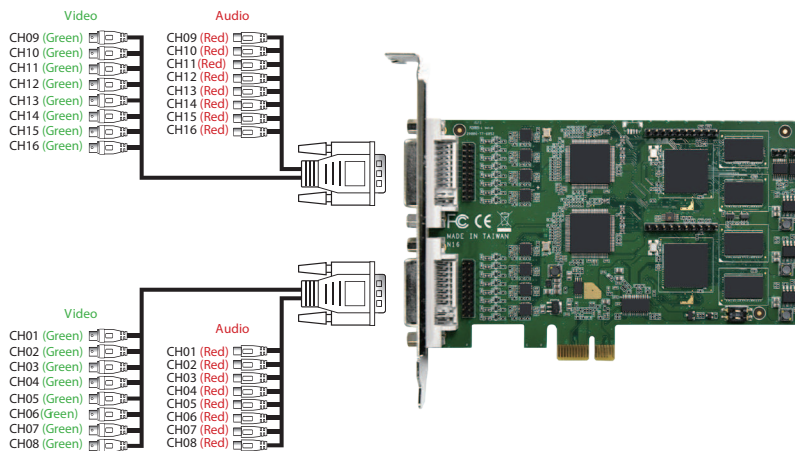

Ordering Information

Part Number	Description
DVP-7642E	8-ch H.264 PCIe Video Capture Card with SDK
DVP-7651E	16-ch H.264 PCIe Video Capture Card with SDK

Packing List

Item	Amount
DVP-7642E/DVP-7651E Capture Card	1 (piece)
Audio/Video cable (DVI-I male header)	1(7642E) (piece) 2(7651E) (piece)
Watchdog Cable (Option)	1 (piece)