



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




DUAL WINDOW SINGLE MODE WIDEBAND FIBER COUPLER (1310 NM AND 1510 NM BAND)

DWFC Series

Product Description

The Oplink fused dual window wideband fiber 1x2 (2x2) couplers provide accurate optical signal coupling and splitting over wide bandwidth with high performance and high reliability. These couplers have excellent uniformity, low excess loss and very low polarization sensitivity and are available with various tap ratios, fiber types, and connector options. All devices are shown to be able to handle high optical power up to 4W and are tested according to industry standard procedures. Reliability is guaranteed through stringent tests to fully meet Telcordia GR-1221 requirements.

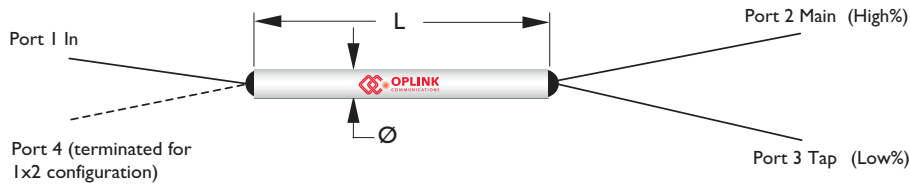

Performance Specification

DWFC Series	Specifications	Unit
Wavelength Range	1310 ± 40 and 1550 ± 40	nm
Fiber Type	Corning SMF-28	
Insertion Loss ^[1]	See Insertion Loss Table	dB
Return Loss ^[1] (Min)	55	dB
Directivity (Min)	55	dB
TDL ^[2] (Max)	Signal Path: < 0.10 dB, Tap Path: < 0.15 dB	dB
Maximum Power Handling	4	W
Operating Temperature Range ^[3]	- 40 to + 75	°C
Storage Temperature Range	- 40 to + 85	°C
Package Dimensions ^[4]	P1: 250 µm bare fiber (Ø) 3.0 x (L) 47.0 P2: 900 µm loose tube (Ø) 3.0 x (L) 60.0 P3: 3mm cable (L) 96.0 x (W) 12.0 x (H) 6.4	mm
Qualifications	Telcordia GR-1221	

Note:

[1] Values are referenced without connector loss.

[2] Temperature Sensitivity Coefficient ~0.002dB/°C at the range of -5 to 75°C.

[3] Operating temperature range changes to -5 to 75°C in P2, P3 package and all package with connectors

[4] The mechanical tolerance should be +/- 0.2 mm on all package dimensions unless otherwise custom specified.

Features

- ◆ Wavelength Independent
- ◆ Low Insertion Loss and PDL
- ◆ High Power Handling
- ◆ Guaranteed Reliability

Applications

- ◆ Signal monitoring in EDFA
- ◆ Network Monitoring
- ◆ CATV
- ◆ Local Area Networks
- ◆ Testing Instruments
- ◆ Laboratory R&D


DWFC SERIES
Insertion Loss (IL) :

Coupling Ratio	P Grade				A Grade				
	IL ¹ (dB)		PDL ² (dB)		IL ¹ (dB)		PDL ² (dB)		Uniformity
	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap	
99/1	≤0.25	18.0-22.5	≤0.05	≤0.20	≤0.25	16.0-23.5	≤0.05	≤0.20	
98/2	≤0.30	16.0-19.0	≤0.05	≤0.20	≤0.30	14.5-19.0	≤0.05	≤0.20	
97/3	≤0.35	13.5-17.0	≤0.05	≤0.20	≤0.35	13.0-18.2	≤0.05	≤0.20	
95/5	≤0.45	11.8-15.0	≤0.10	≤0.20	≤0.45	12.0-16.5	≤0.10	≤0.20	
90/10	≤0.65	9.60-11.30	≤0.10	≤0.15	≤0.65	9.20-12.2	≤0.10	≤0.15	
85/15	≤0.98	7.80-9.40	≤0.10	≤0.15	≤0.98	7.80-9.80	≤0.10	≤0.15	
80/20	≤1.25	6.50-7.85	≤0.15	≤0.15	≤1.25	6.40-8.00	≤0.15	≤0.15	
75/25	≤1.60	5.50-6.80	≤0.15	≤0.15	≤1.80	5.30-7.00	≤0.15	≤0.15	
70/30	≤2.00	4.70-6.00	≤0.15	≤0.15	≤1.95	4.50-6.50	≤0.15	≤0.15	
65/35	≤2.10	4.30-5.20	≤0.15	≤0.15	≤2.30	4.30-5.50	≤0.15	≤0.15	
60/40	≤2.70	3.50-4.70	≤0.15	≤0.15	≤2.80	3.20-5.00	≤0.15	≤0.15	
55/45	≤3.00	3.00-4.20	≤0.15	≤0.15	≤3.20	2.80-4.50	≤0.15	≤0.15	
50/50	2.70-3.60		≤0.15	≤0.70	2.40-3.90		≤0.20	≤1.2	

1. Insertion loss over operating wavelength range at ~23°C (excluding PDL and TDL).
2. Insertion loss change over the all input polarization states.

Ordering Information

Oplink can provide a remarkable range of customized optical solutions. For detail, please contact Oplink's OEM design team or account manager for your requirements and ordering information (510) 933-7200.

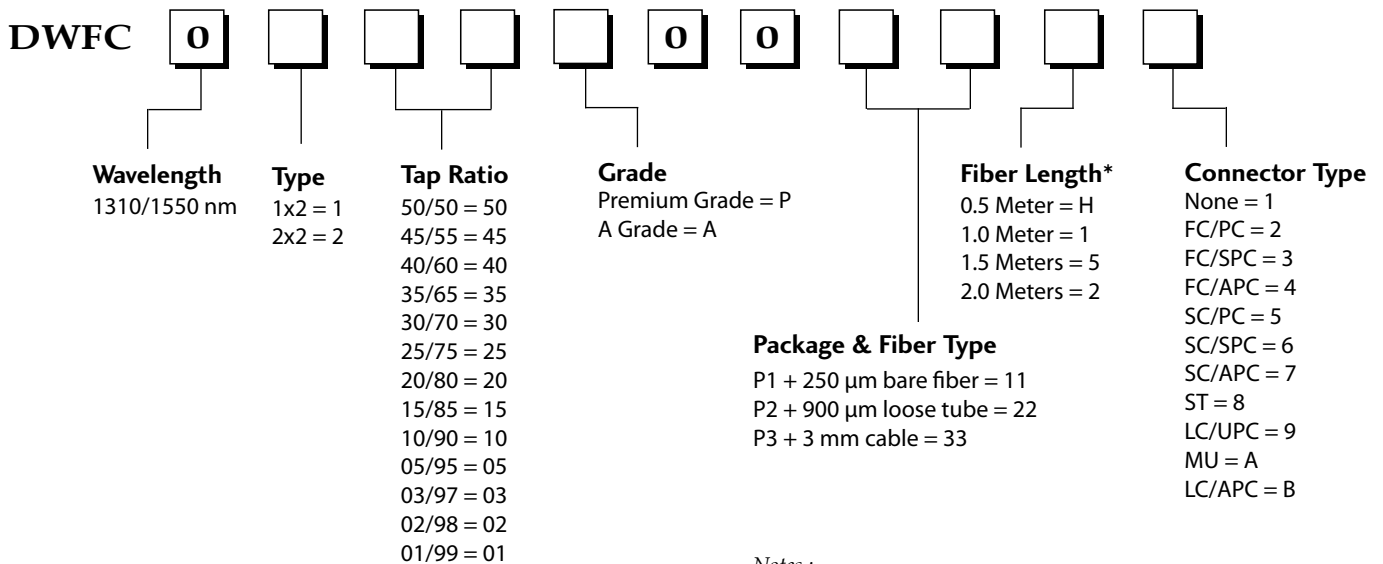

Notes :
 * The tolerance of fiber length is +/-0.1m. 1 meter is standard.
 The lead time for special fiber length will be longer.