



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!







Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



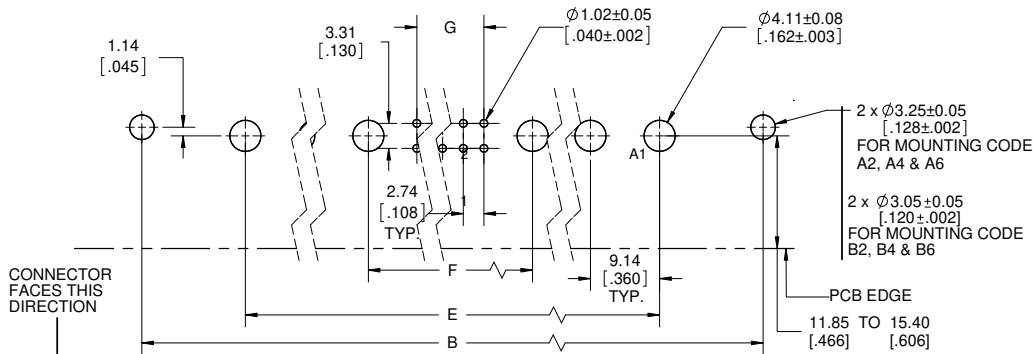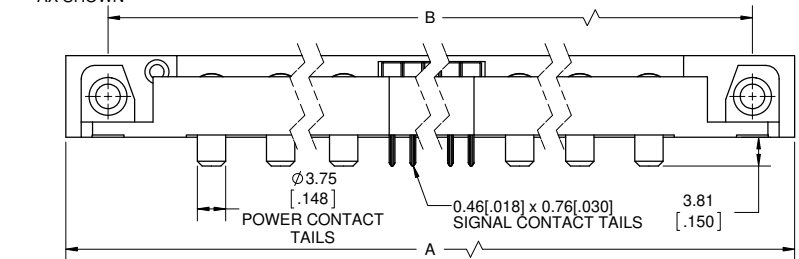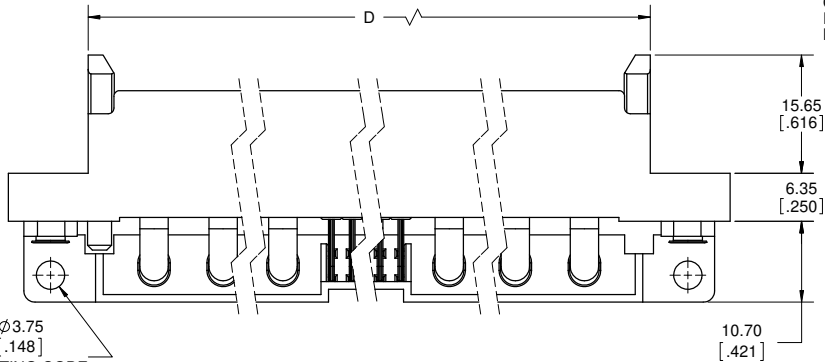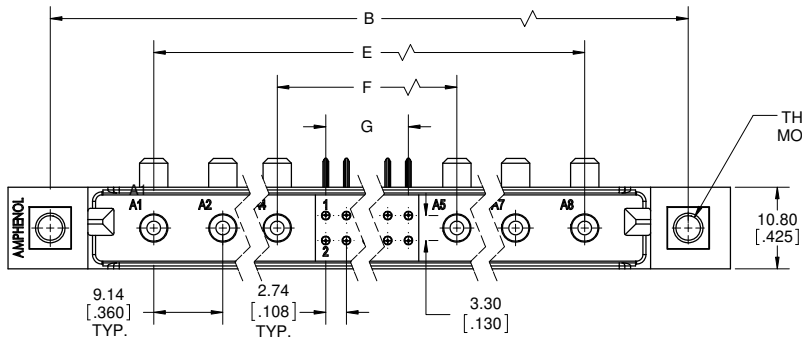

**RECOMMENDED PCB LAYOUT
COMPONENT SIDE OF BOARD**

LOCATE HOLES
 $\varnothing$ 0.13 [.005] DIA
 POSITION DIMENSIONS
 ARE BASIC

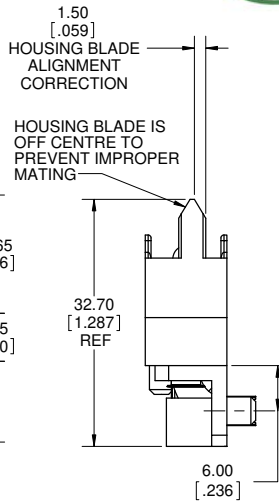

**MAX PCB LAYOUT
AT MATED CONDITION**



REVISONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	FAMILY DRAWING (EAR 13889)	AUG17/11	S.M
B	UPDATE	OCT20/11	S.M
C	PART NUMBER UPDATE	MAR15/11	S.M
E	ADD UL FILE NUMBER	MAY15/13	S.M
F	PCB EDGE ADDED	OCT10/13	S.M

PART NUMBER:

DWR - T X XX P - R X 3 X - X X

SERIES:
DWR

PRODUCT TYPE
T = SLIMDRAWER FINISHED CONNECTOR

NUMBER OF POWER CONTACT POSITIONS
2, 4, 6 OR 8

NUMBER OF SIGNAL CONTACT POSITIONS
00, 04, 06, 08, 10 ... 40

GENDER
P = PIN (MALE)

ORIENTATION
R = RIGHT ANGLE

CONTACT OPTIONS
2 = POWER PIN SIZE CB8 ($\varnothing$ 3.50mm)
3 = POWER PIN SIZE CB10 ($\varnothing$ 3.00mm)
STD SIGNAL

CONTACT TERMINATION
3 = PCB TAIL: POWER
3.75mm [.148"] DIA, 3.81mm [.150"] LONG
STD SIGNAL PCB TAIL

PLATING OPTIONS
2 = 0.38 μ m [15 μ] GOLD
3 = 0.76 μ m [30 μ] GOLD
6 = 5.08 μ m [200 μ] SILVER POWER,
0.38 μ m [15 μ] GOLD SIGNAL

MOUNTING OPTION, RIGHT ANGLE PCB AXIS
A = BRACKET WITH 3.75mm [.148"] DIA THROUGH HOLE
B = BRACKET WITH BOARDLOCK

MOUNTING OPTION, MATING AXIS
2 = 3.25mm [.128"] DIA THROUGH HOLE
FOR MOUNTING OR 3 mm DIA GUIDE PIN
4 = #4-40 THREADED HOLE
6 = M3 THREADED HOLE

SPECIAL CONFIGURATIONS

MANY UNIQUE FEATURES ARE READILY
AVAILABLE TO SUIT CUSTOMER REQUIREMENTS.
CONSULT AUTHORIZED AMPHENOL
REPRESENTATIVE FOR DETAILS.

NOTES:

- MATERIALS: ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU AND AMENDMENTS
 - HOUSING: HIGH TEMPERATURE RESISTANT NYLON, UL FLAMMABILITY RATING 94V-0, COLOUR BLACK
 - SIGNAL CONTACTS: PHOSPHOR BRONZE PLATED WITH GOLD OVER 1.27 μ m (50 μ) NICKEL ON THE MATING AREA AND 2.54 μ m (100 μ) MATTE TIN OVER NICKEL ON THE TAILS.
 - POWER CONTACTS: COPPER ALLOY PLATED WITH GOLD OR SILVER OVER 1.27 μ m (50 μ) MIN NICKEL
- WHEN MATED WITH SOCKET CONNECTOR DWR-TXXXS-VXXX-XX, THE ORDER OF MECHANICAL AND ELECTRICAL ENGAGEMENT IS A) HOUSING BLADES, B) HOUSING SHROUD, C) POWER CONTACTS AND D) SIGNAL CONTACTS.
- ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: UP TO 55A POWER, 4A SIGNAL
 - INSULATION RESISTANCE: 5000 MEGOHMS
 - DIELECTRIC WITHSTANDING VOLTAGE: 2500V DC
 - OPERATING TEMPERATURE: -55°C TO +105°C
- UL FILE NUMBER: E64911

UNLESS SPECIFIED OTHERWISE	DRAWN	S.CAELERS	AUG17/11
PRIMARY UNITS MILLIMETERS	CHECKED	S.MUGAN	AUG17/11
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES	THIRD ANGLE PROJECTION		
ANGULAR DEGREES	DO NOT SCALE DRAWING		


Amphenol Canada Corp.

DWR SERIES SLIM DRAWER PIN CONNECTOR,
PIN & SIGNAL CONTACTS, RIGHT ANGLE PCB
TAILS ($\varnothing$ 3.75mm [.148"] x 3.81mm [.150"] LONG),
RoHS COMPLIANT


P-DWR-TXXXP-RX3X-XX

	A		B		C		D		E		F		G				
	Pin Connector Part number	Number of Power Contacts	Number of Signal Contacts	"A" Overall Length		"B" Mounting Hole Centrelines		"C" Length Without Mounting Ears		"D" Pin Body Length		"E" Outside Power Centrelines		"F" Inside Power Centrelines		"G" Outside Signal Centrelines	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
1	DWR-T200P-RX3X-XX	2	0	47.70	1.878	36.53	1.438	29.75	1.171	26.57	1.046	9.14	0.360	9.14	0.360	---	---
	DWR-T204P-RX3X-XX	2	4	54.10	2.130	42.93	1.690	36.15	1.423	32.97	1.298	15.54	0.612	15.54	0.612	2.74	0.108
	DWR-T208P-RX3X-XX	2	8	59.59	2.346	48.41	1.906	41.63	1.639	38.46	1.514	21.03	0.828	21.03	0.828	8.23	0.324
	DWR-T212P-RX3X-XX	2	12	65.07	2.562	53.90	2.122	47.12	1.855	43.94	1.730	26.52	1.044	26.52	1.044	13.72	0.540
2	DWR-T216P-RX3X-XX	2	16	70.56	2.778	59.39	2.338	52.61	2.071	49.43	1.946	32.00	1.260	32.00	1.260	19.20	0.756
	DWR-T220P-RX3X-XX	2	20	76.05	2.994	64.87	2.554	58.09	2.287	54.91	2.162	37.49	1.476	37.49	1.476	24.69	0.972
	DWR-T224P-RX3X-XX	2	24	81.53	3.210	70.36	2.770	63.58	2.503	60.40	2.378	42.98	1.692	42.98	1.692	30.18	1.188
	DWR-T228P-RX3X-XX	2	28	87.02	3.426	75.84	2.986	69.06	2.719	65.89	2.594	48.46	1.908	48.46	1.908	35.66	1.404
3	DWR-T232P-RX3X-XX	2	32	92.51	3.642	81.33	3.202	74.55	2.935	71.37	2.810	53.95	2.124	53.95	2.124	41.15	1.620
	DWR-T236P-RX3X-XX	2	36	97.99	3.858	86.82	3.418	80.04	3.151	76.86	3.026	59.44	2.340	59.44	2.340	46.63	1.836
	DWR-T240P-RX3X-XX	2	40	103.48	4.074	92.30	3.634	85.52	3.367	82.35	3.242	64.92	2.556	64.92	2.556	52.12	2.052
	DWR-T400P-RX3X-XX	4	0	65.99	2.598	54.81	2.158	48.03	1.891	44.86	1.766	27.43	1.080	9.14	0.360	---	---
4	DWR-T404P-RX3X-XX	4	4	72.39	2.850	61.21	2.410	54.43	2.143	51.26	2.018	33.83	1.332	15.54	0.612	2.74	0.108
	DWR-T408P-RX3X-XX	4	8	77.88	3.066	66.70	2.626	59.92	2.359	56.74	2.234	39.32	1.548	21.03	0.828	8.23	0.324
	DWR-T412P-RX3X-XX	4	12	83.36	3.282	72.19	2.842	65.41	2.575	62.23	2.450	44.81	1.764	26.52	1.044	13.72	0.540
	DWR-T416P-RX3X-XX	4	16	88.85	3.498	77.67	3.058	70.89	2.791	67.72	2.666	50.29	1.980	32.00	1.260	19.20	0.756
5	DWR-T420P-RX3X-XX	4	20	94.34	3.714	83.16	3.274	76.38	3.007	73.20	2.882	55.78	2.196	37.49	1.476	24.69	0.972
	DWR-T424P-RX3X-XX	4	24	99.82	3.930	88.65	3.490	81.87	3.223	78.69	3.098	61.26	2.412	42.98	1.692	30.18	1.188
	DWR-T428P-RX3X-XX	4	28	105.31	4.146	94.13	3.706	87.35	3.439	84.18	3.314	66.75	2.628	48.46	1.908	35.66	1.404
	DWR-T432P-RX3X-XX	4	32	110.79	4.362	99.62	3.922	92.84	3.655	89.66	3.530	72.24	2.844	53.95	2.124	41.15	1.620
6	DWR-T436P-RX3X-XX	4	36	116.28	4.578	105.11	4.138	98.33	3.871	95.15	3.746	77.72	3.060	59.44	2.340	46.63	1.836
	DWR-T440P-RX3X-XX	4	40	121.77	4.794	110.59	4.354	103.81	4.087	100.63	3.962	83.21	3.276	64.92	2.556	52.12	2.052
	DWR-T600P-RX3X-XX	6	0	84.28	3.318	73.10	2.878	66.32	2.611	63.14	2.486	45.72	1.800	9.14	0.360	---	---
	DWR-T604P-RX3X-XX	6	4	90.68	3.570	79.50	3.130	72.72	2.863	69.55	2.738	52.12	2.052	15.54	0.612	2.74	0.108
7	DWR-T608P-RX3X-XX	6	8	96.16	3.786	84.99	3.346	78.21	3.079	75.03	2.954	57.61	2.268	21.03	0.828	8.23	0.324
	DWR-T612P-RX3X-XX	6	12	101.65	4.002	90.47	3.562	83.69	3.295	80.52	3.170	63.09	2.484	26.52	1.044	13.72	0.540
	DWR-T616P-RX3X-XX	6	16	107.14	4.218	95.96	3.778	89.18	3.511	86.00	3.386	68.58	2.700	32.00	1.260	19.20	0.756
	DWR-T620P-RX3X-XX	6	20	112.62	4.434	101.45	3.994	94.67	3.727	91.49	3.602	74.07	2.916	37.49	1.476	24.69	0.972
8	DWR-T624P-RX3X-XX	6	24	118.11	4.650	106.93	4.210	100.15	3.943	96.98	3.818	79.55	3.132	42.98	1.692	30.18	1.188
	DWR-T628P-RX3X-XX	6	28	123.60	4.866	112.42	4.426	105.64	4.159	102.46	4.034	85.04	3.348	48.46	1.908	35.66	1.404
	DWR-T632P-RX3X-XX	6	32	129.08	5.082	117.91	4.642	111.13	4.375	107.95	4.250	90.53	3.564	53.95	2.124	41.15	1.620
	DWR-T636P-RX3X-XX	6	36	134.57	5.298	123.39	4.858	116.61	4.591	113.44	4.466	96.01	3.780	59.44	2.340	46.63	1.836
9	DWR-T640P-RX3X-XX	6	40	140.06	5.514	128.88	5.074	122.10	4.807	118.92	4.682	101.50	3.996	64.92	2.556	52.12	2.052
	DWR-T800P-RX3X-XX	8	0	102.57	4.038	91.39	3.598	84.61	3.331	81.43	3.206	64.01	2.520	9.14	0.360	---	---
	DWR-T804P-RX3X-XX	8	4	108.97	4.290	97.79	3.850	91.01	3.583	87.83	3.458	70.41	2.772	15.54	0.612	2.74	0.108
	DWR-T808P-RX3X-XX	8	8	114.45	4.506	103.28	4.066	96.50	3.799	93.32	3.674	75.90	2.988	21.03	0.828	8.23	0.324
10	DWR-T812P-RX3X-XX	8	12	119.94	4.722	108.76	4.282	101.98	4.015	98.81	3.890	81.38	3.204	26.52	1.044	13.72	0.540
	DWR-T816P-RX3X-XX	8	16	125.43	4.938	114.25	4.498	107.47	4.231	104.29	4.106	86.87	3.420	32.00	1.260	19.20	0.756
	DWR-T820P-RX3X-XX	8	20	130.91	5.154	119.74	4.714	112.96	4.447	109.78	4.322	92.35	3.636	37.49	1.476	24.69	0.972
	DWR-T824P-RX3X-XX	8	24	136.40	5.370	125.22	4.930	118.44	4.663	115.27	4.538	97.84	3.852	42.98	1.692	30.18	1.188
11	DWR-T828P-RX3X-XX	8	28	141.88	5.586	130.71	5.146	123.93	4.879	120.75	4.754	103.33	4.068	48.46	1.908	35.66	1.404
	DWR-T832P-RX3X-XX	8	32	147.37	5.802	136.19	5.362	129.41	5.095	126.24	4.970	108.81	4.284	53.95	2.124	41.15	1.620
	DWR-T836P-RX3X-XX	8	36	152.86	6.018	141.68	5.578	134.90	5.311	131.72	5.186	114.30	4.500	59.44	2.340	46.63	1.836
	DWR-T840P-RX3X-XX	8	40	158.34	6.234	147.17	5.794	140.39	5.527	137.21	5.402	119.79	4.716	64.92	2.556	52.12	2.052

FOR INTERMEDIATE CONFIGURATIONS (NUMBER OF SIGNAL CONTACTS = 06, 10, 14 ...) DIMENSIONS CAN BE CALCULATED BY SUBTRACTING 2.7432mm [.108"] FROM THE VALUES OF THE NEXT LARGEST CONFIGURATION. FOR EXAMPLE, DIMENSIONS OF DWR-T206P-VXXX-XX CAN BE OBTAINED BY SUBTRACTING 2.7432mm [.108"] FROM THE VALUES CORRESPONDING TO DWR-T208P-VXXX-XX.

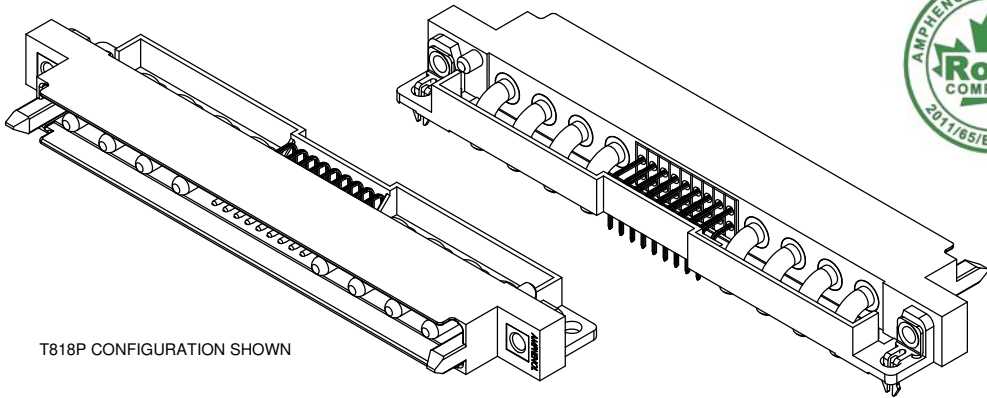


PIN AND SOCKET
MATED ASSEMBLY



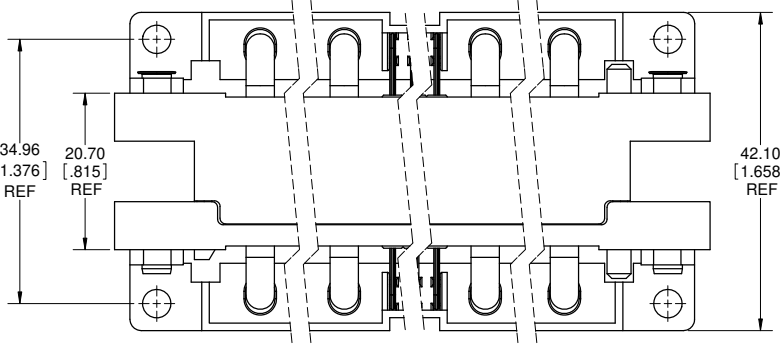


MOUNTING OPTIONS

MOUNTING CODE
AX



MOUNTING CODE
BX

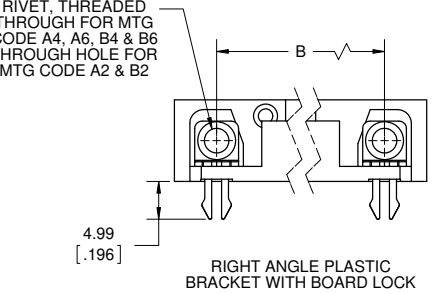

UNLESS SPECIFIED OTHERWISE	DRAWN	S.CAELERS	AUG17/11
PRIMARY UNITS MILLIMETERS	CHECKED	S.MUGAN	AUG17/11
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES	THIRD ANGLE PROJECTION		
ANGULAR DEGREES	DO NOT SCALE DRAWING		

Amphenol Canada Corp.			
DWR SERIES SLIM DRAWER PIN CONNECTOR, PIN & SIGNAL CONTACTS, RIGHT ANGLE PCB TAILS (Ø3.75mm [.148"] x 3.81mm [.150"] LONG), RoHS COMPLIANT			
DWG. NO. P-DWR-TXXXP-RX3X-XX			REV F
CODE ID NO. 03554	DWG. SIZE: C	SCALE: 2:1	SHEET 2 OF 2