



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION

Part No.	:	DXP.02.A
Product Name	:	SMD L1/L2/L5 SAW Diplexer For GNSS Band Applications
Features	:	L5 1176.45 / L2 1222.7625 / L1 1575.42 MHz SAW Diplexer SMT Direct Mount Compact Size 5*5*1.7mm Low Insertion Loss In band High Isolation Port to Port RoHS Compliant

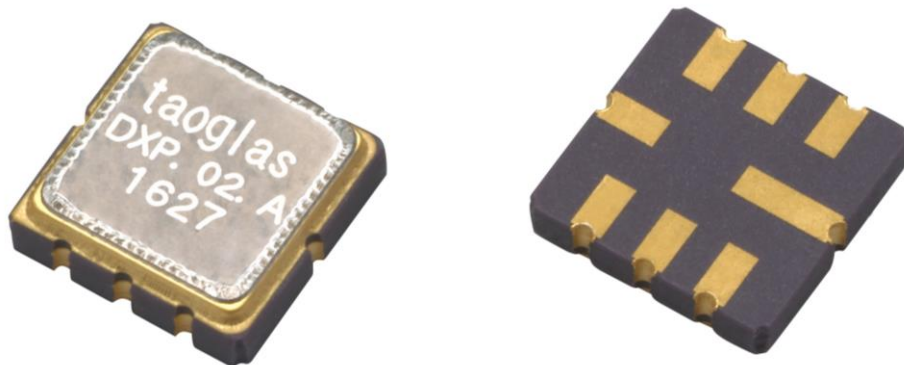

1. Introduction

The Taoglas DXP.02.A is a compact SAW diplexer for use in any navigation system application using the GPS/GALILEO L1, L2 & L5 bands.

The diplexer is designed to function as both a bandpass filter for each band and to either split one path into three or to combine the bands back into one RF feed. For example, a customer who wanted to use passive antenna elements would need to implement a diplexer in some cases to split the bands out into separate paths. It is also designed to isolate and reject any unwanted GPS signals from getting to the application port.

It is housed in a compact 5*5*1.7mm over-molded laminate package and is easy to integrate using SMT process mounting directly onto the target PCB.


Contact your regional Taoglas sales office for more information or support.

2. Specification

Band 1 (L1)			
	Min.	Typ.	Max.
Center Frequency (MHz)	-	1582.1875	-
Insertion Loss (dB)	-	3.8	4.6
Amplitude Ripple (dB)	-	0.6	2.0
Return Loss (dB)	-	-13	-6.0
Attenuation (Reference level from 0dB)			
10 ~ 1330 (MHz)	32	38	-
1660 ~ 2000 (MHz)	27	33	-
Band 2 (L2 and L5)			
	Min.	Typ.	Max.
Center frequency (MHz)	-	1206.9225	-
Insertion Loss (dB)	-	4.2	5.2
Amplitude Ripple (dB)	-	1.2	2.5
Return Loss (dB)	-	-8	-6
Attenuation (Reference level from 0dB)			
10 ~ 1100 (MHz)	17	23	-
1320 ~ 2000 (MHz)	20	28	-
Band 1 and Band 2			
	Min.	Typ.	Max.
Isolation (1196.9~1248.625MHz)	22	35	-
Isolation (1574.22~1576.62 dB)	22	31	-
Environmental			
Operating Temperature	-40°C to 85°C		
Storage Temperature	-40°C to 85°C		
Input power Level	10 dBm		
DC Voltage	3 V		

3. Measurement Circuit

HP Network analyzer

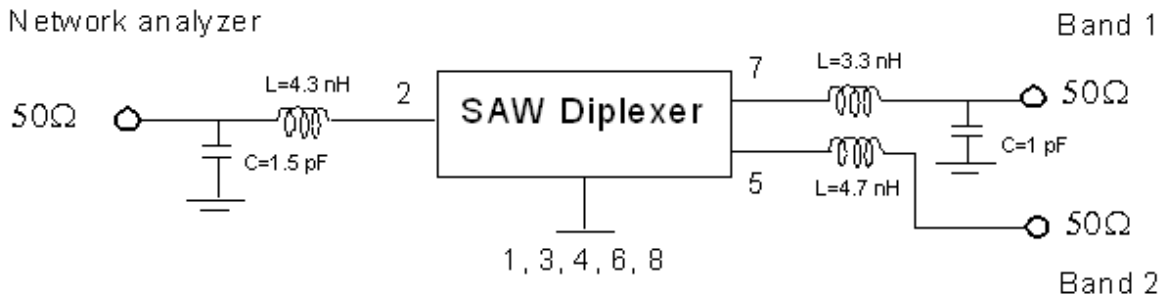


3.1 Test setup


Band 1 (L1) Band 2 (L2/L5)



Common Port

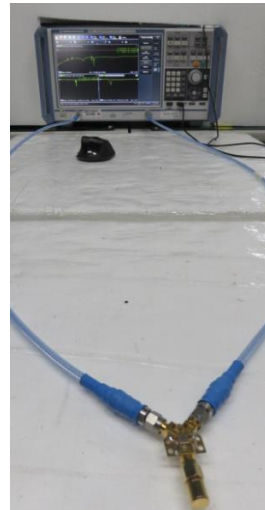


3.2 Return Loss

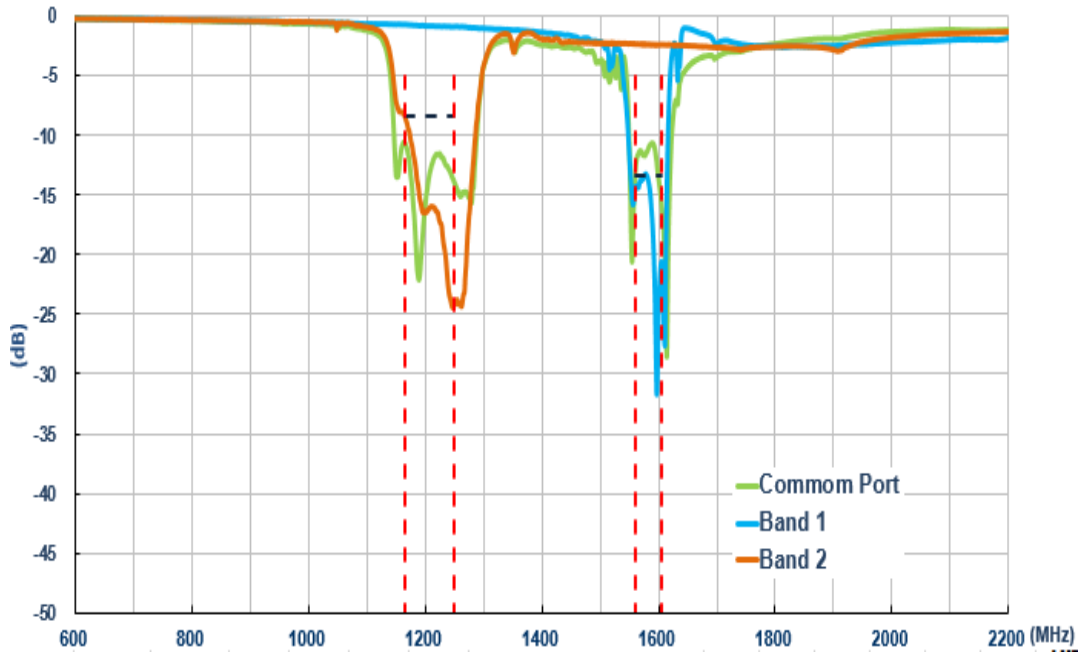


Return Loss (dB)	
Band 1 1559~1605.375MHz	Band 2 1165.22~1248.625MHz
<-13.4	<-8.4

3.3 Common Port to Band 1 Port _ 1582.1875MHz Attenuation

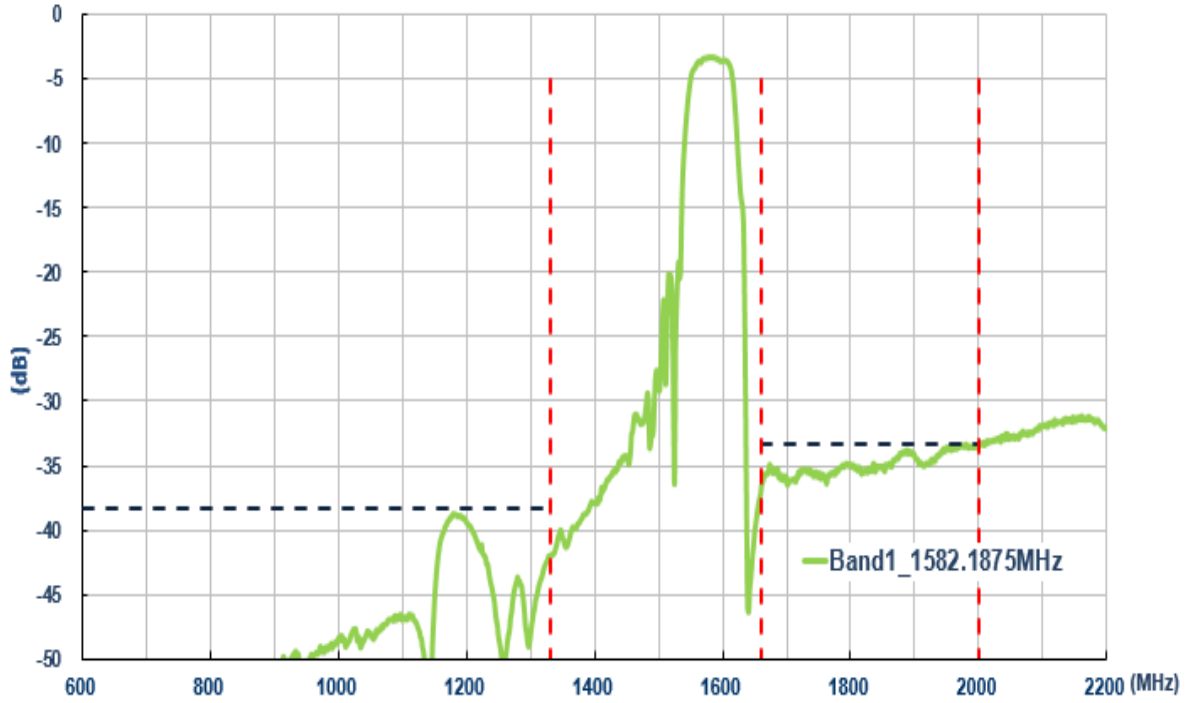


Attenuation (dB)	
10~1330MHz	1660~2000MHz
<-38.4	<-33.4

3.4 Common Port to Band 1 Port _ 1582.1875MHz Insertion Loss

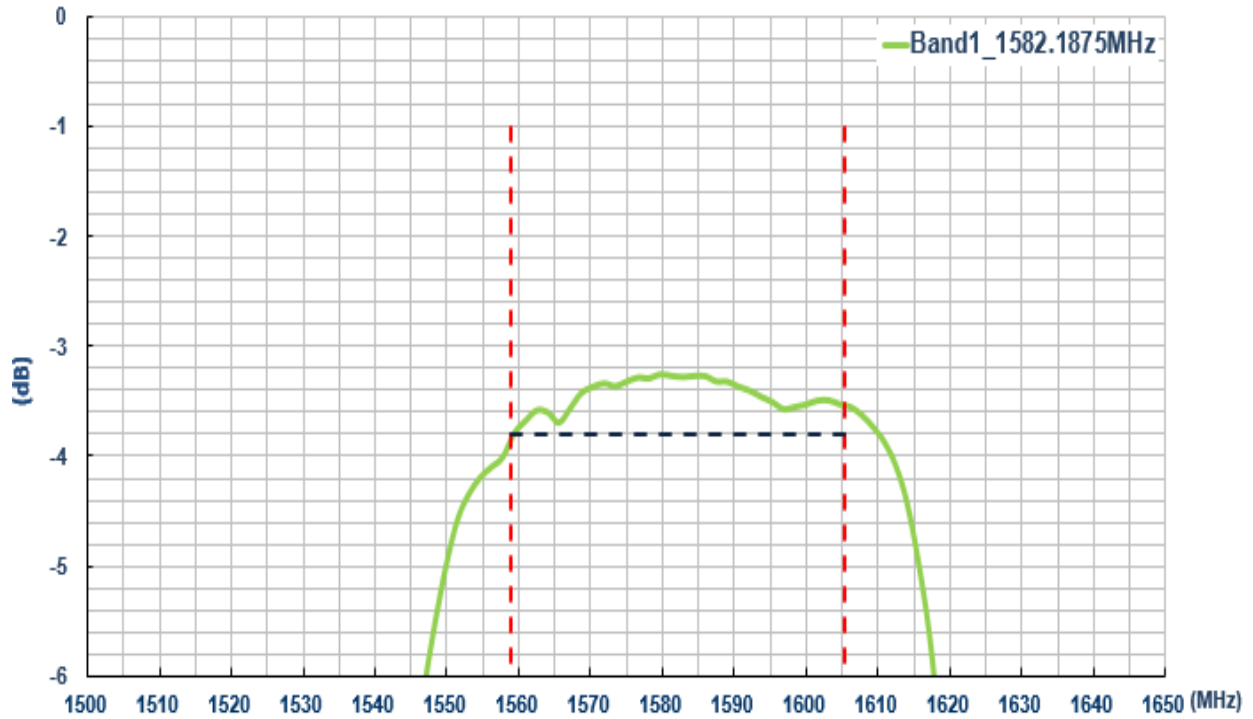


Insertion Loss(dB)
1559~1605.375MHz
< -3.8

3.4 Common Port to Band 1 Port _1206.9225MHz Attenuation

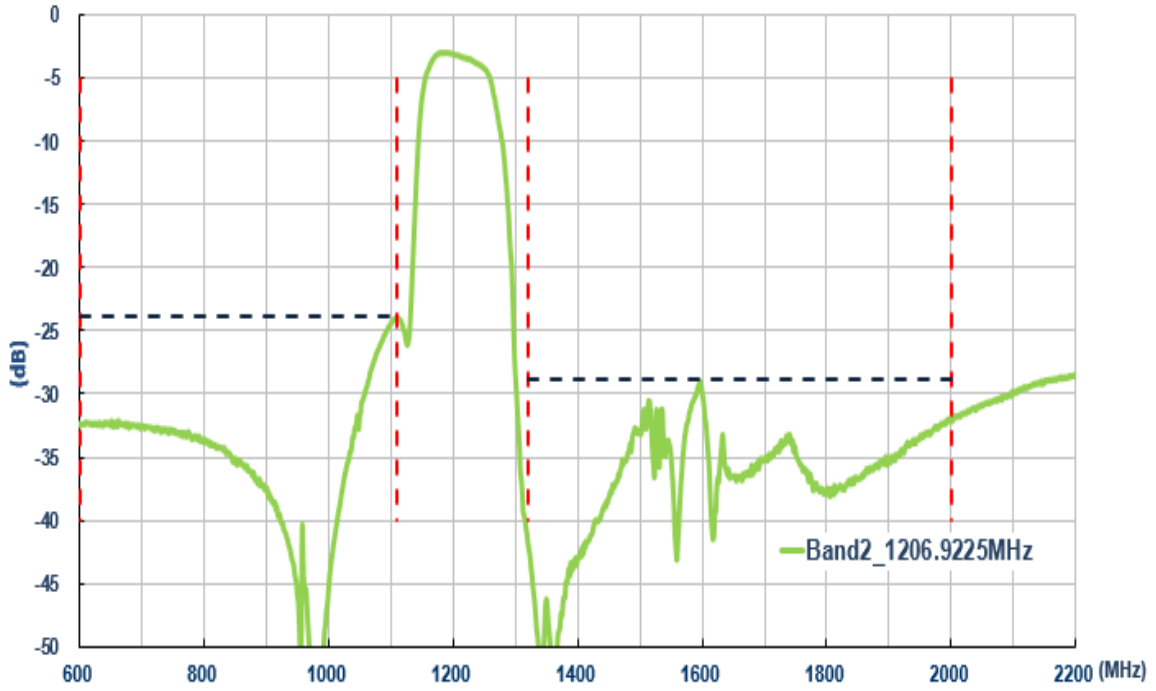


Attenuation (dB)	
10~1110MHz	1320~2000MHz
<-23.9	<-28.9

3.5 Common Port to Band 2 Port _ 1206.9225MHz Insertion Loss

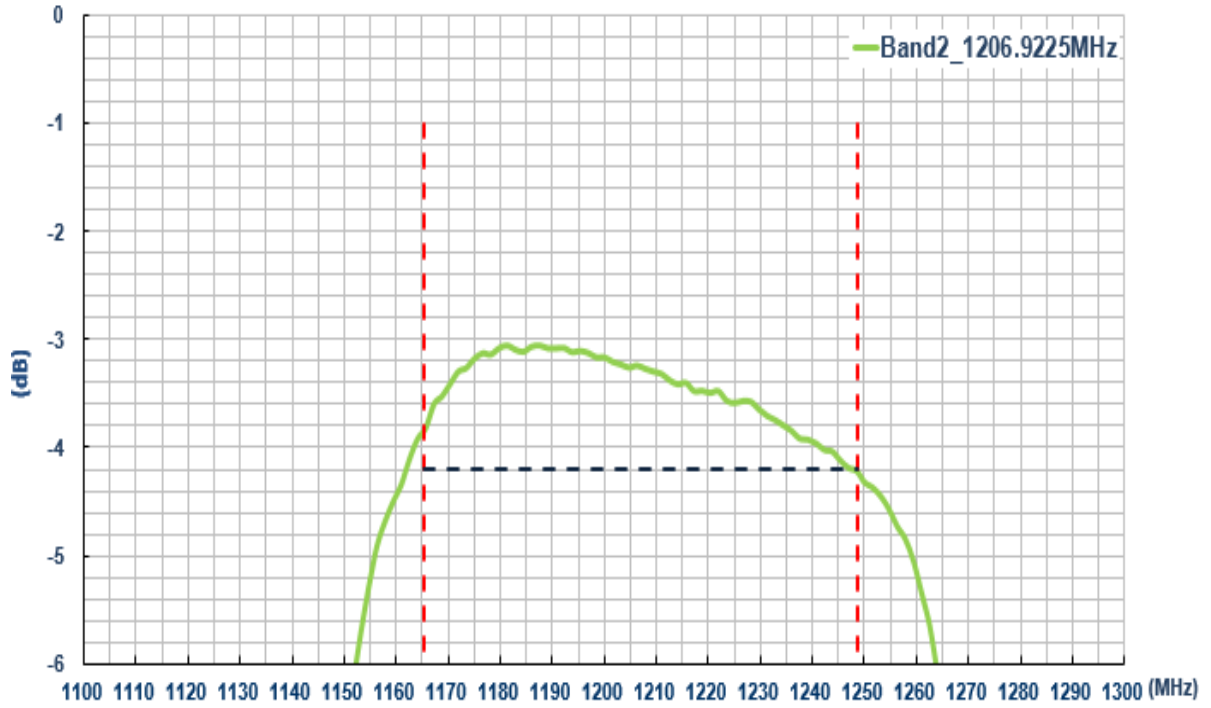

Insertion Loss(dB)
1165.22~1248.625MHz
> -4.2

3.6 Band1Port – Band 2 Port Isolation

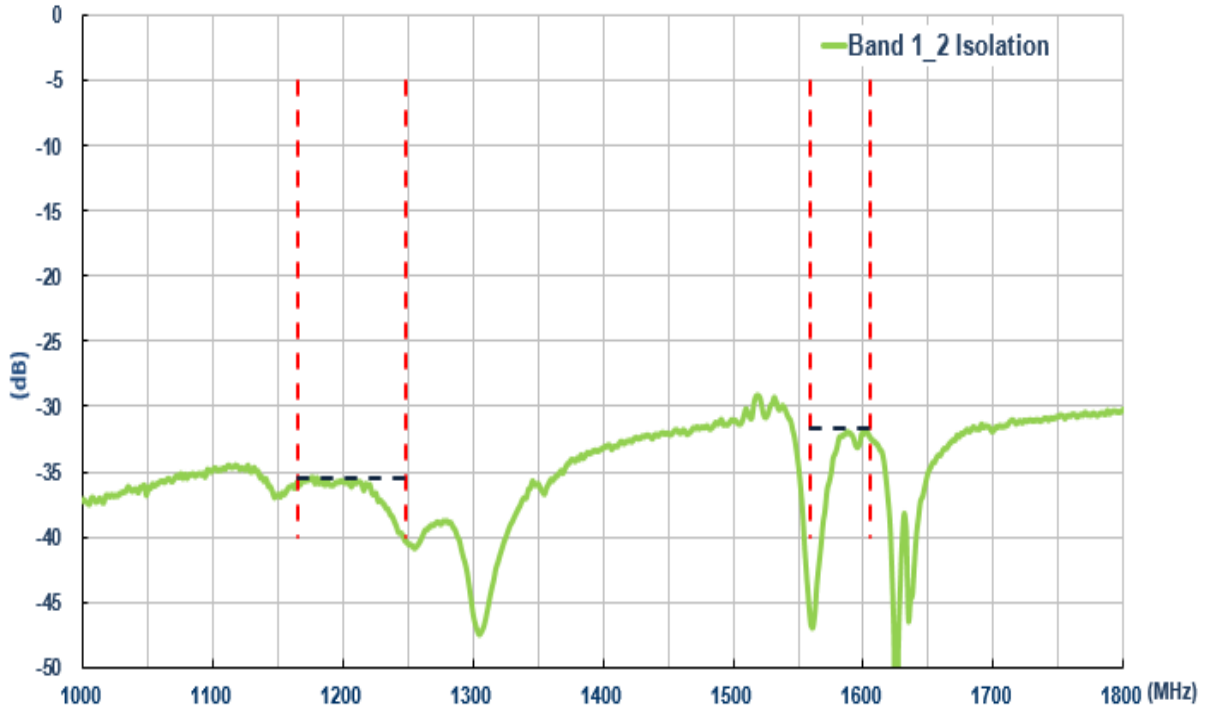


Isolation (dB)	
Band 1 1165.22~1248.625 MHz	Band 2 1559~1605.375MHz
<-35.5	-31.6


4. Drawing (Unit: mm)

4.1 Diplexer Drawing


Front View




Side View




Back View



4.2 Foot Print

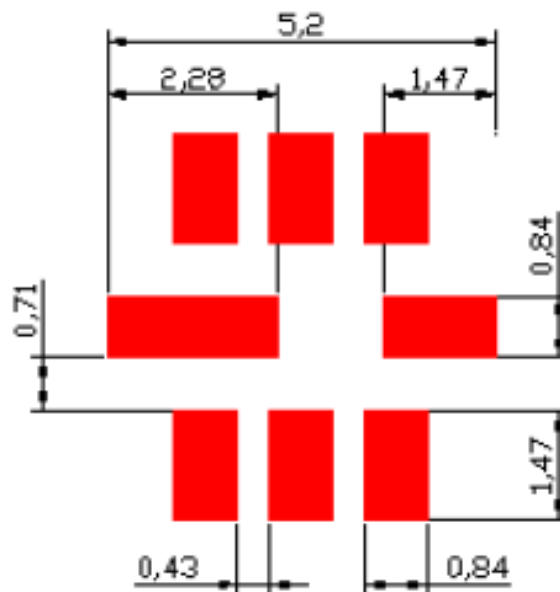


5. Recommended Reflow Profile

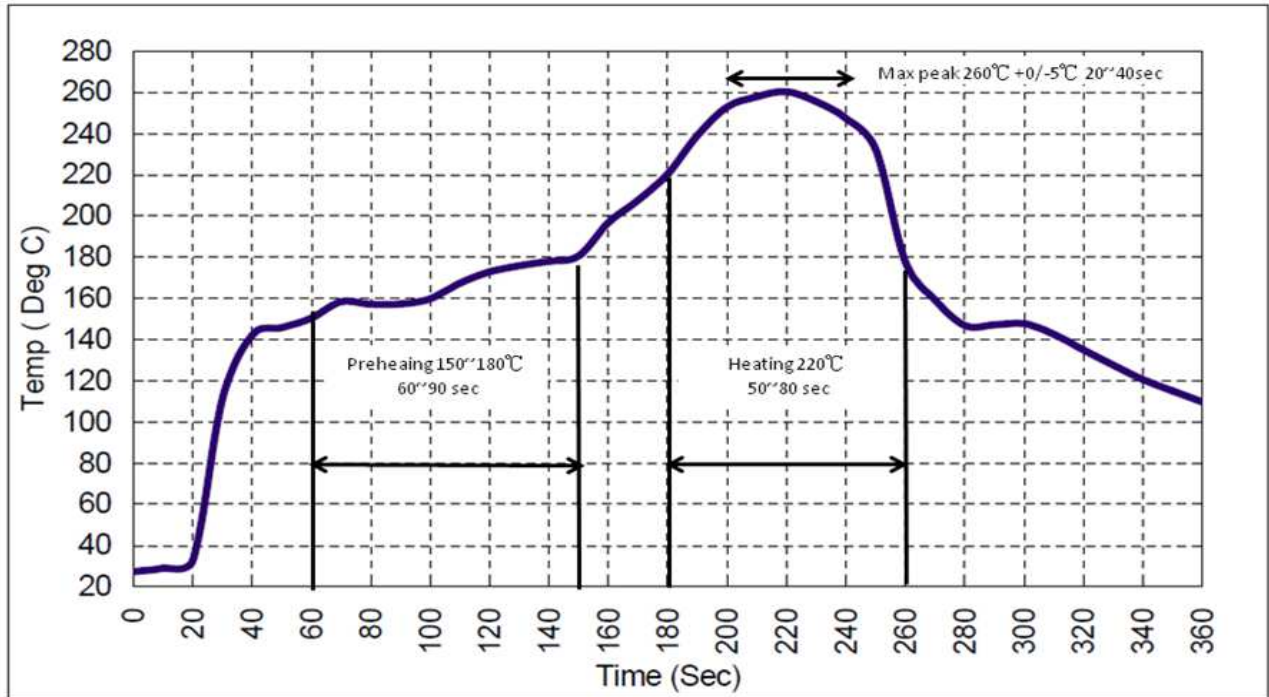


1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds minimum.
3. Heating shall be fixed at 220°C for 50~80 seconds and 260°C as the peak for 20-40 seconds.
4. Time: 2 times.

6. Packaging


Tape Dimension

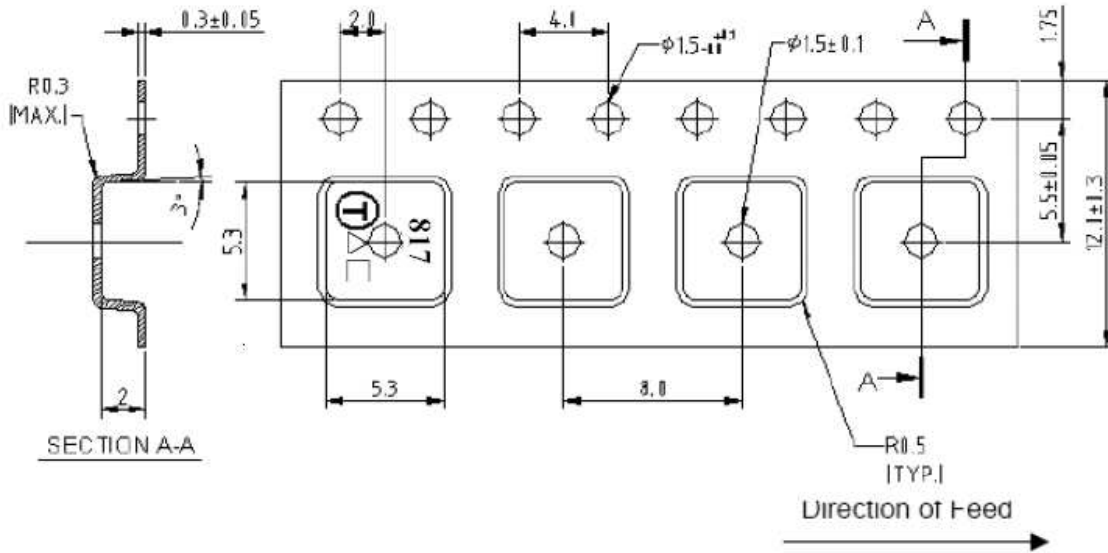

Reel Dimension

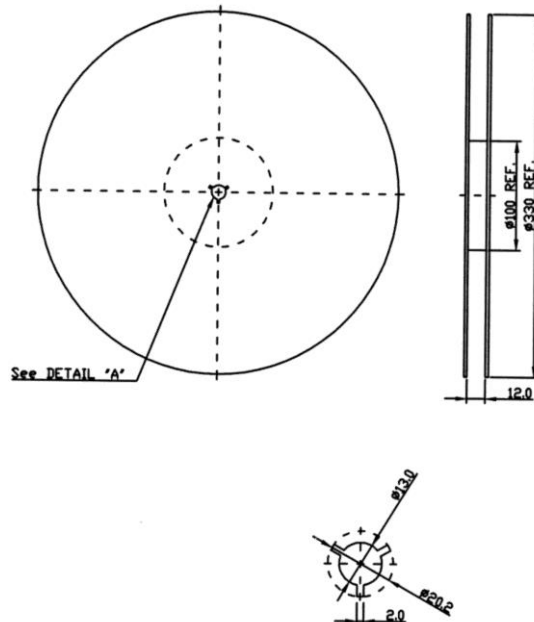

Packaging Detail

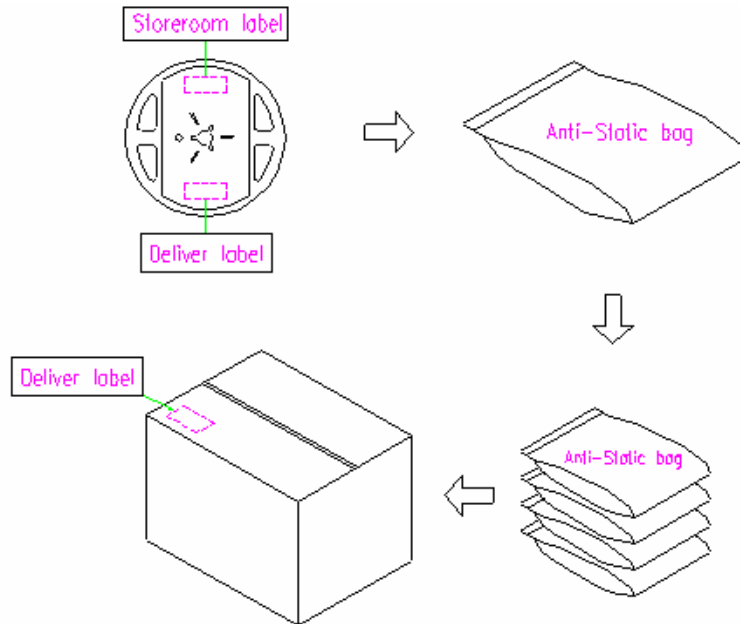

1k pieces per reel, 4 reels per carton.

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas