



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Core **E25/13/7**

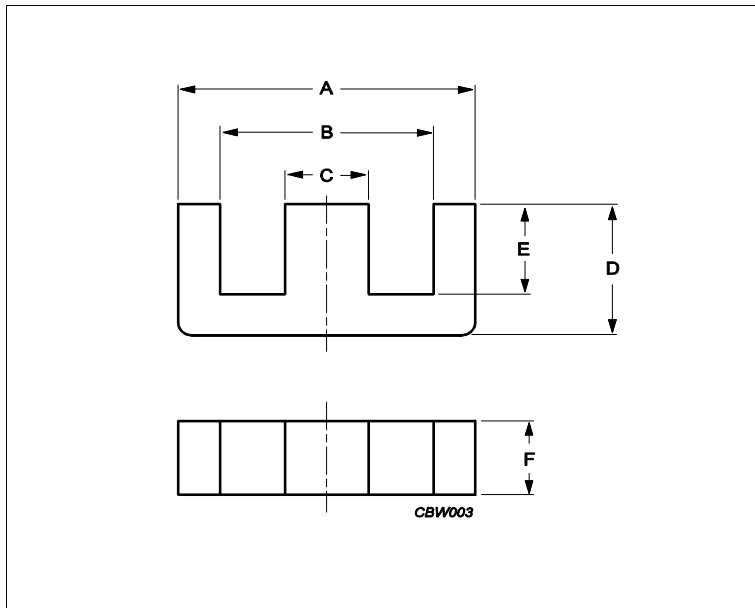

Effective parameters			
	Parameter	Value	Unit
$\Sigma(I/A)$	core factor (C1)	1.11	mm <sup>-1</sup>
<b>Ve</b>	effective volume	2990	mm <sup>3</sup>
<b>Le</b>	effective length	58	mm
<b>Ae</b>	effective area	52	mm <sup>2</sup>
<b>Amin</b>	minimum area	52	mm <sup>2</sup>
<b>m</b>	E25/13/7	≈ 8	g/pcs

Dimensions for product: E25/13/7

	Nom	Tol +	Tol -	Max	Min	Unit
<b>A</b>	25.00	0.80	0.70	25.80	24.30	mm
<b>B</b>	17.50	1.00	0.00	18.50	17.50	mm
<b>C</b>	7.50	0.00	0.50	7.50	7.00	mm
<b>D</b>	12.80	0.00	0.50	12.80	12.30	mm
<b>E</b>	8.70	0.50	0.00	9.20	8.70	mm
<b>F</b>	7.50	0.00	0.50	7.50	7.00	mm

Inductance factor

Material	Value	Tol +	Tol -	Unit
3C92	1450	25%	25%	nH/turns <sup>2</sup>
3C94	1900	25%	25%	nH/turns <sup>2</sup>
3C96	1650	25%	25%	nH/turns <sup>2</sup>
3F36	1300	25%	25%	nH/turns <sup>2</sup>

Power loss: 3C92

Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	1.500	W/set

Power loss: 3C94

Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	1.500	W/set

Power loss: 3C96

Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	1.300	W/set
400 kHz	50 mT	100 °C	0.540	W/set

Core **E25/13/7**

### Power loss: 3F36

Measuring conditions			Max	Unit
500 kHz	50 mT	100 °C	0.450	W/set
500 kHz	100 mT	100 °C	3.400	W/set

### Bsat

Measuring conditions			Material	Min	Unit
25 kHz	250 A/m	100 °C	3C92	370	mT
25 kHz	250 A/m	100 °C	3C94	320	mT
25 kHz	250 A/m	100 °C	3C96	340	mT
25 kHz	250 A/m	100 °C	3F36	340	mT

### Accessories

Ordering name	Description	Ordering code
CLI-E25/13/7	Clip	432202100401
CPH-E25/13/7-1S-10P	Coil former, termoplastic, horizontal	432202100391
CPV-E25/13/7-1S-10P-Z	Coil former, termoplastic, vertical	432202106421
CSH-E25/13/7-1S-8P-C	Coil former, termoset, horizontal	432202104091
CSV-E25/13/7-1S-6P-C	Coil former, termoset, vertical	432202104461