



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REVISION RECORD		
REV	DESCRIPTION	DRFT
15	ADD DATE CODE	VICTOR 3/13/2012
16	ADD PLANARITY ON PINS	Jacky 04/08/2013

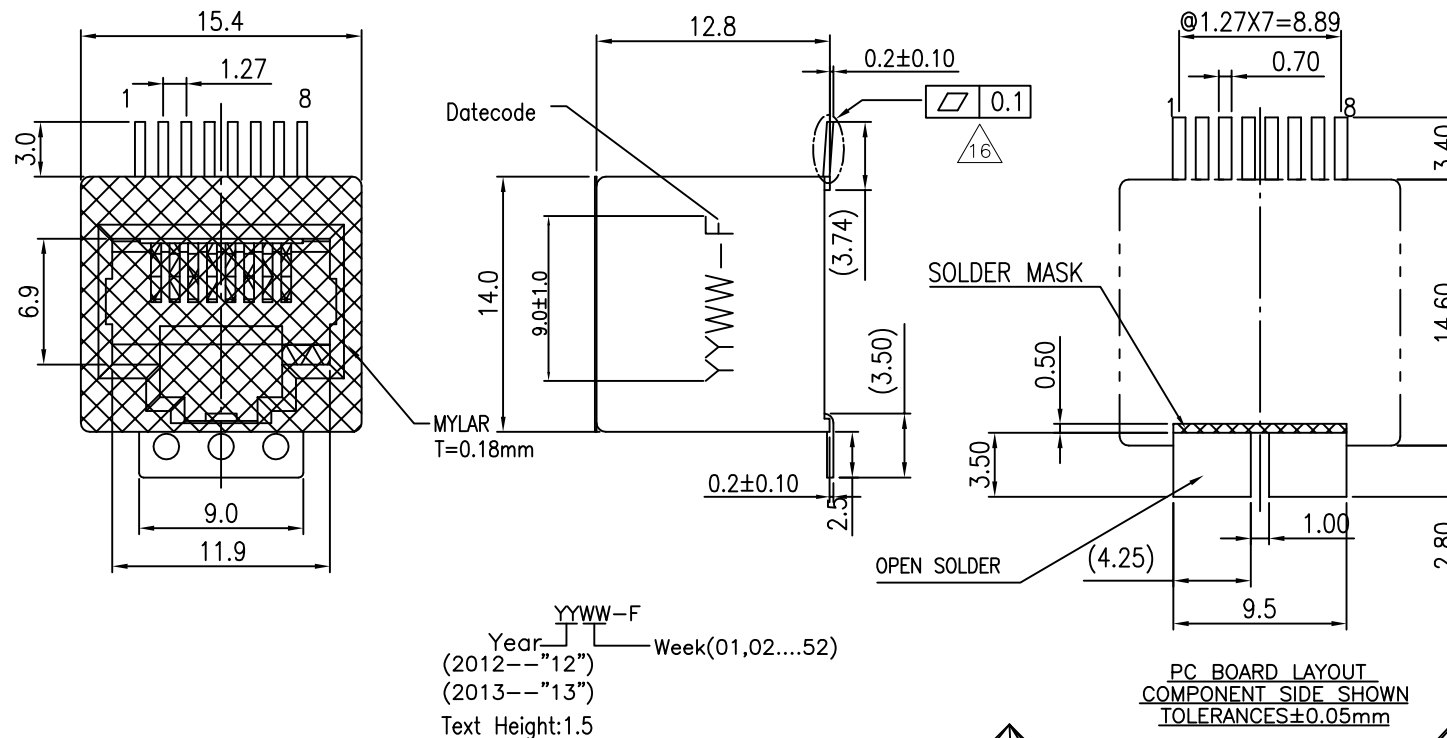

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:


- HOUSING MATERIAL : PA10T UL94V-0./COLOR:BLACK.
- INSERT : HIGH TEMP UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL ON CONTACT AREA.
: MATTE Sn PLATING FOR SOLDERING PINS.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION POST-SOLDER: 18 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- IR REFLOW PEAK SOLDERING TEMPERATURE:
255°C TO 265°C (5-10 SECONDS).
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER:	MYLAR THICKNESS	PLATING
E5288-006-02-L	0.18mm	30u''

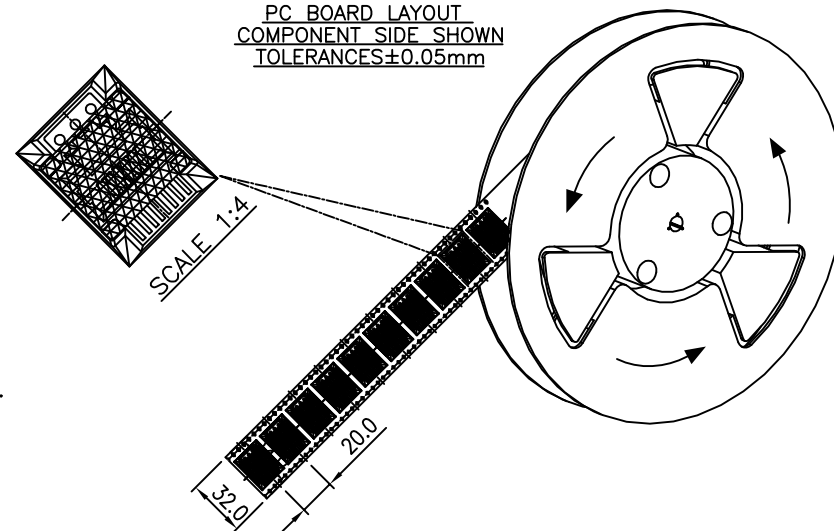

MM (INCH)		RoHS Compliant		Pulse Electronics	
TOLERANCES EXCEPT AS NOTED		TITLE WITH 0.18mm MYLAR			
MM		TOP ENTRY SMD (15.4x14.0)			
.0 ± 0.25	±	DFTO : Jacky		DRAWING NO. CE5288-006-02-L	
.00 ± 0.20	±	DATE : 04/08/2013		/PART NO. E5288-006-02-L	
.000 ± 0.10	±	SCALE : 10:3		DO NOT SCALE DRAWING	
ANGLES ± 1°		THIRD ANGLE PROJECTION		SIZE A3	
				REV 16	
				SHEET 1 OF 1	