



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us





Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REVISION RECORD	
REV	DESCRIPTION
	DFT

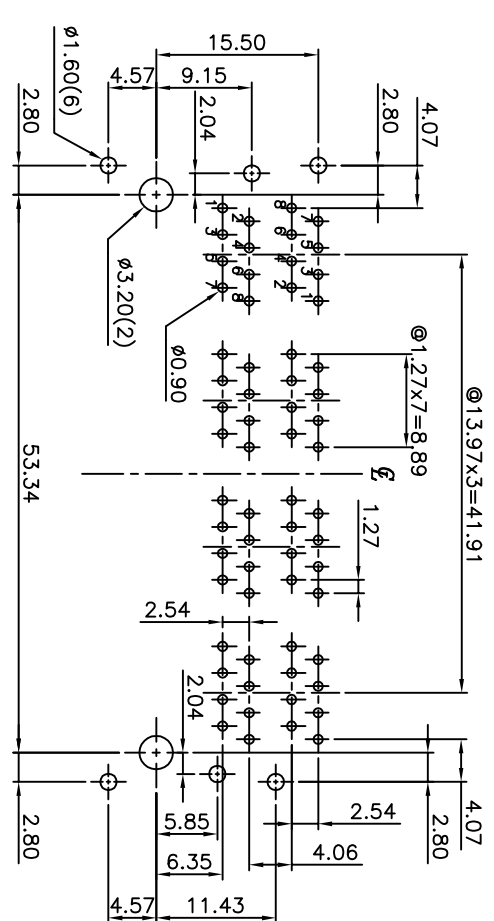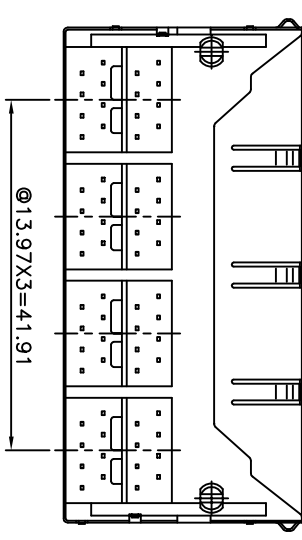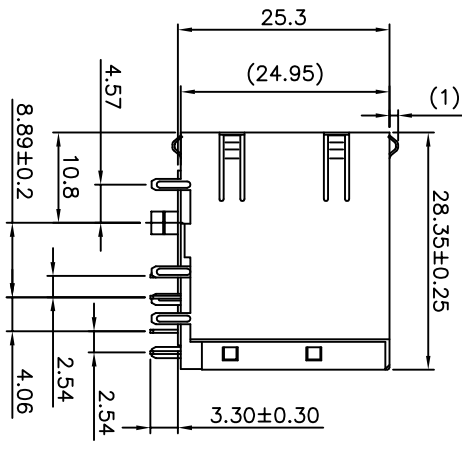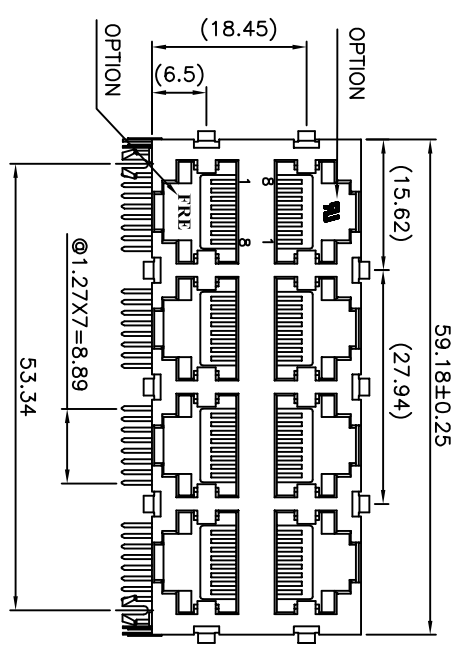

PC BOARD LAYOUT T=1.60mm
COMPONENT SIDE SHOWN
TOLERANCES±0.05mm

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60HZ, 1MIN.

MECHANICAL:

- HOUSING & IN'S MATERIAL : PBT FIBER GLASS FILLED . UL94V-0
- CONTACT MATERIAL : PHOSPHOR BRONZE, T=0.35mm.
- SHIELD MATERIAL : COPPER ALLOY, T=0.25mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C TO +85°C.
 - OPERATION TEMPERATURE: -40°C TO +85°C.
 - WAVE SOLDERING TEMPERATURE: 235°C TO 245°C (3~5 SECONDS).
 - RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191

DETACHED LISTS	
MM	INCH
TOLERANCES EXCEPT AS NOTED	
MM	±
0 ± 0.25	±
.00 ± 0.20	±
.000 ± 0.10	±
ANGLES ± 1°	
THIRD ANGLE PROJECTION	
RoHS Compliant	
Pulse Electronics	
STAMPED PIN III	
TITLE	STACKED GANGED JACK, 2X4
DFTO :	KURT
DATE :	05/07/2012
SCALE :	3:2
DRAWING NO.	CE5908-SVC14X-L
/PART NO.	E5908-SVC145-L
DO NOT SCALE DRAWING	
SHEET	1 OF 1
SIZE	A3
REV	0

ES908-SVC145-L	NICKEL	BLACK	500*	W/
PART NO.	SHIELD PLATING	COLOR	AU PLATING	FRE & UL LOGO