



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




ENERGIZER E96

AAAA



Industry Standard Dimensions

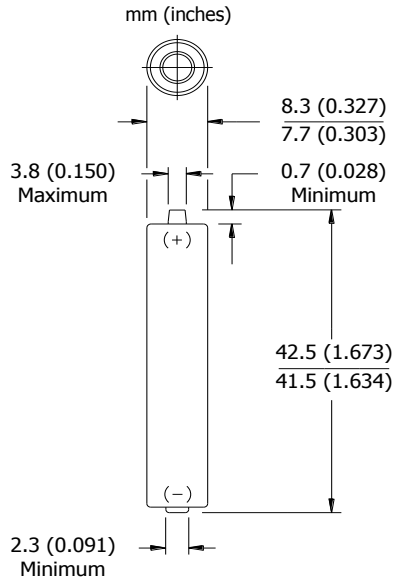


Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-25A, IEC-LR8D425, LR61
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	6.5 grams (0.2 oz.)
Typical Volume:	2.2 cubic centimeters (0.1 cubic inch)
Jacket:	Plastic Label
Shelf Life:	5 years at 21°C
Terminal:	Flat Contact

Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

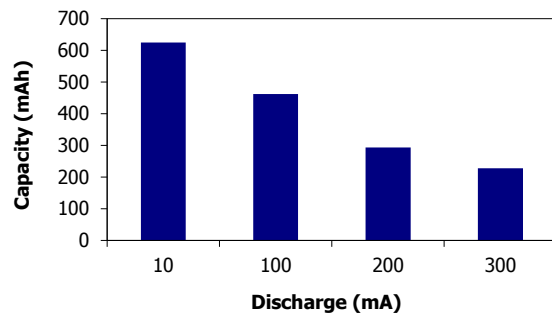

Device Selection Guide:

- Tape Player 
- Lighting 
- Laser pointer 

Battery Selection Indicator

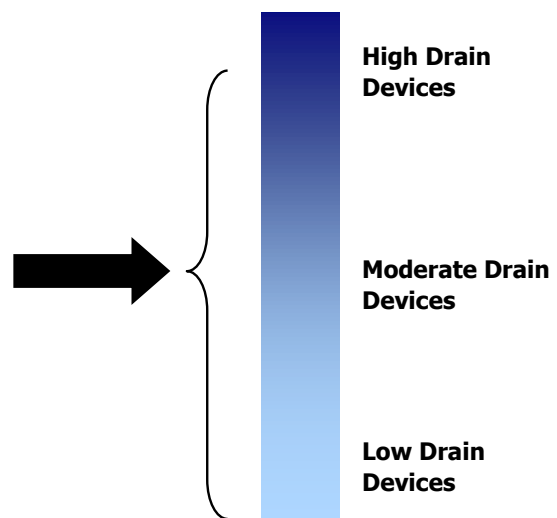

Important Notice


This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E96

AAAA


Constant Resistance Performance

Typical Characteristics (21°C)

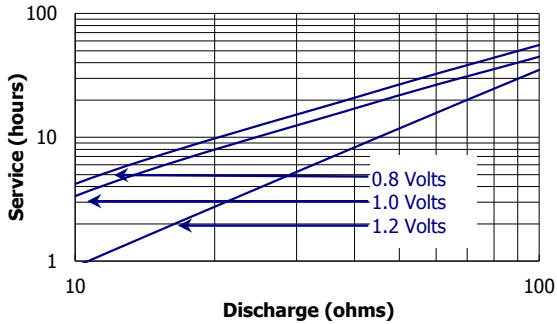


Constant Current Performance

Typical Characteristics (21°C)

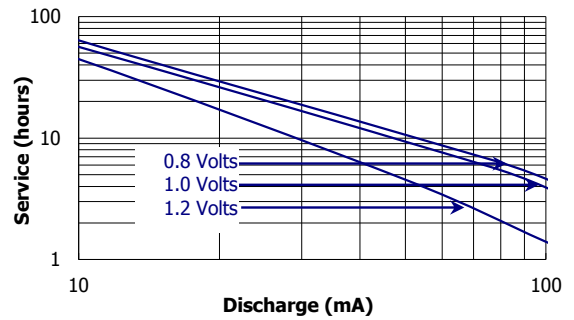


Constant Power Performance

Typical Characteristics (21°C)

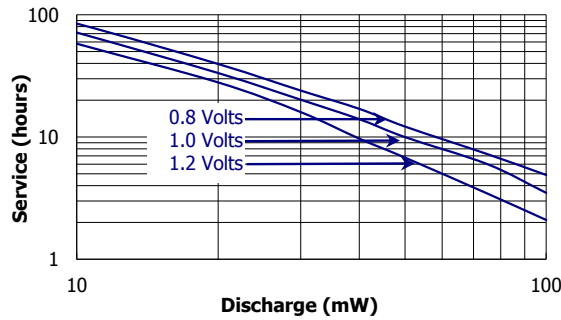


Industry Standard Tests (21°C)

LASER POINTER
75 ohm 1 hr/day

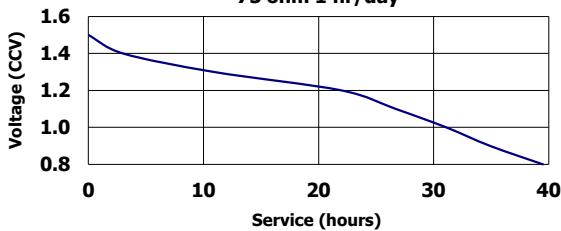

LIGHTING
3.9 ohm LIF

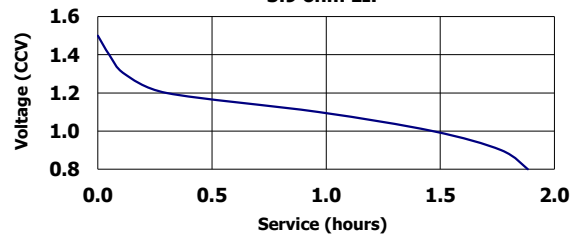

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.