



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### Technical Data Sheet Opto Interrupter EAITRDA2

#### Features

- Fast response time
- High analytic
- High sensitivity
- Cut-off visible wavelength  $\lambda_P=940\text{nm}$
- Pb Free
- This product itself will remain within RoHS compliant version.

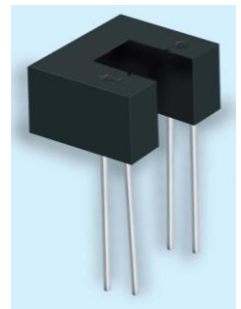

#### Description

The **EAITRDA2** consist of an infrared emitting diode and an NPN silicon phototransistor, encased side-by-side on converging optical axis in a black thermoplastic housing, The phototransistor receives radiation from the IRED only .This is the normal situation. But when an object is in between , phototransistor could not receives the radiation. For additional component information , please refer to IR928-6C-F and PT928-6C-F

#### Applications

- Mouse Copier
- Switch Scanner
- Floppy disk driver
- Non-contact Switching
- For Direct Board

### Device Selection Guide

| Device No. | Chip Material | LENS COLOR  |
|------------|---------------|-------------|
| IR         | GaAlAs        | Water clear |
| PT         | Silicon       | Water clear |

### Absolute Maximum Ratings (Ta=25°C)

| Parameter   |   | Symbol             | Ratings  | Unit |
|---|---|--------------------|----------|------|
| Input   | Power Dissipation at(or below) 25°C Free Air Temperature    | Pd                 | 75       | mW   |
|   | Reverse Voltage   | V <sub>R</sub>     | 5        | V    |
|   | Forward Current   | I <sub>F</sub>     | 50       | mA   |
|   | Peak Forward Current (*1) Pulse width ≤100μs, Duty cycle=1% | I <sub>FP</sub>    | 1        | A    |
| Output  | Collector Power Dissipation                                 | P <sub>C</sub>     | 75       | mW   |
|   | Collector Current   | I <sub>C</sub>     | 20       | mA   |
|   | Collector-Emitter Voltage                                   | B V <sub>CEO</sub> | 30       | V    |
|   | Emitter-Collector Voltage                                   | B V <sub>ECO</sub> | 5        | V    |
| Operating Temperature   |   | T <sub>opr</sub>   | -25~+85  | °C   |
| Storage Temperature   |   | T <sub>stg</sub>   | -40~+100 | °C   |
| Lead Soldering Temperature (*2) (1/16 inch form body for 5 seconds) |   | T <sub>sol</sub>   | 260      | °C   |



**Notes:** (\*1)  $t_w=100 \mu\text{sec.}$ ,  $T=10 \text{ msec.}$  (\*2)  $t=5 \text{ Sec}$


**Electro-Optical Characteristics (Ta=25°C)**

| Parameter               |                        | Symbol        | Min. | Typ. | Max. | Unit          | Condition   |
|-------------------------|------------------------|---------------|------|------|------|---------------|---|
| Input                   | Forward Voltage        | $V_F$         | -    | 1.2  | 1.5  | V             | $I_F=20\text{mA}$                                       |
|                         | Reverse Current        | $I_R$         | -    | -    | 10   | $\mu\text{A}$ | $V_R=5\text{V}$   |
|                         | Peak Wavelength        | $\lambda_P$   | -    | 940  | -    | nm            | $I_F=20\text{mA}$                                       |
| Output                  | Dark Current           | $I_{CEO}$     | -    | -    | 100  | nA            | $V_{CE}=20\text{V}, E_e=0\text{mW/cm}^2$                |
|                         | C-E Saturation Voltage | $V_{CE(sat)}$ | -    | 0.15 | 0.4  | V             | $I_C=2\text{mA}, E_e=1\text{mW/cm}$                     |
| Collector Current( * 3) |                        | $I_{C(ON)}$   | 0.5  | -    | -    | mA            | $V_{CE}=5\text{V}, I_F=20\text{mA}$                     |
|                         |                        | $I_{C(OFF)}$  | ---  | ---  | 20   | $\mu\text{A}$ |   |
| Response Time           | Rise Time              | $t_R$         | -    | 15   | -    | $\mu\text{s}$ | $V_{CE}=5\text{V}, I_C=1\text{mA}, R_L=1\text{K}\Omega$ |
|                         | Fall Time              | $t_F$         | -    | 15   | -    | $\mu\text{s}$ |   |




Typical Electrical/Optical/Characteristics Curves for IR

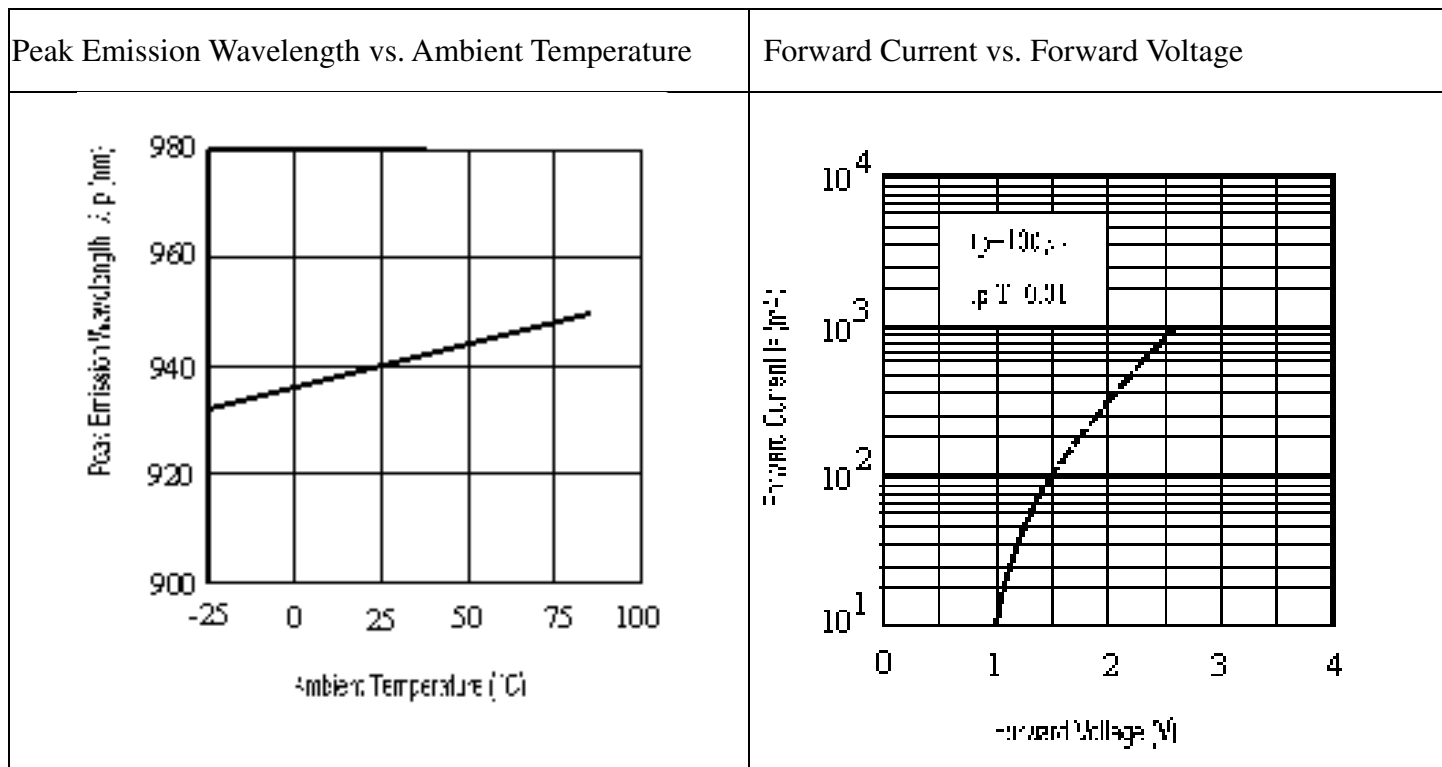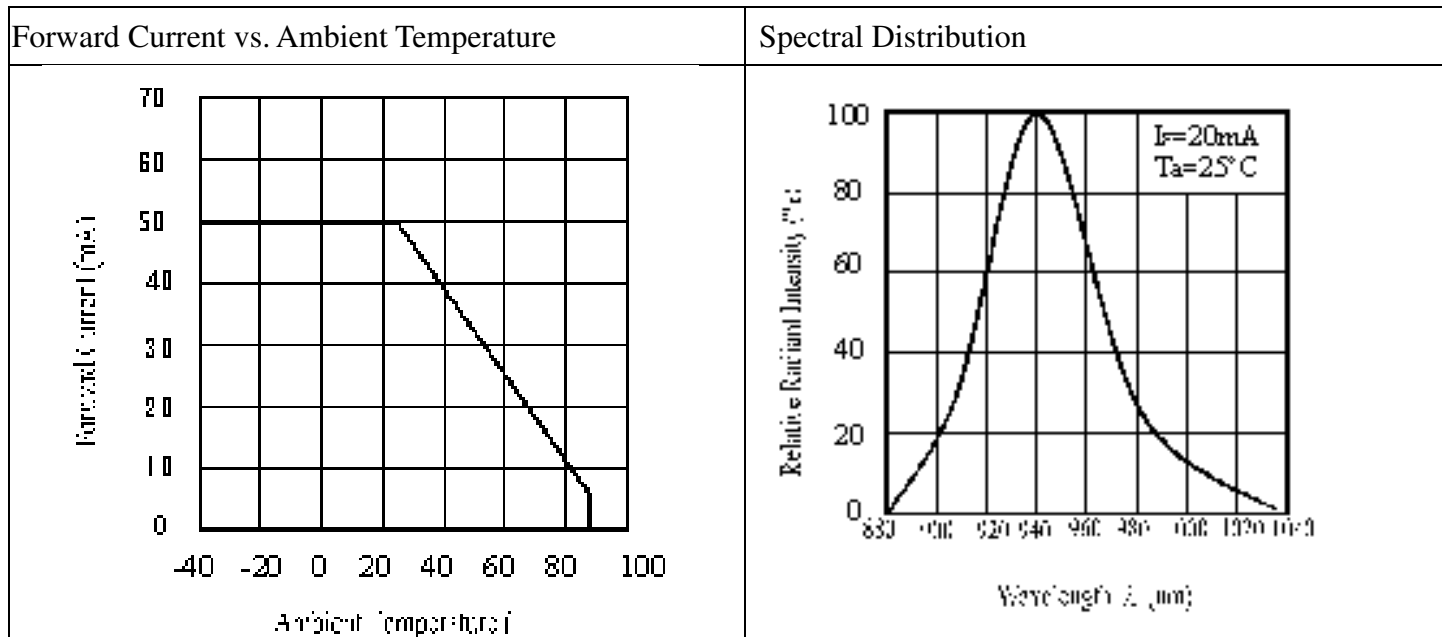


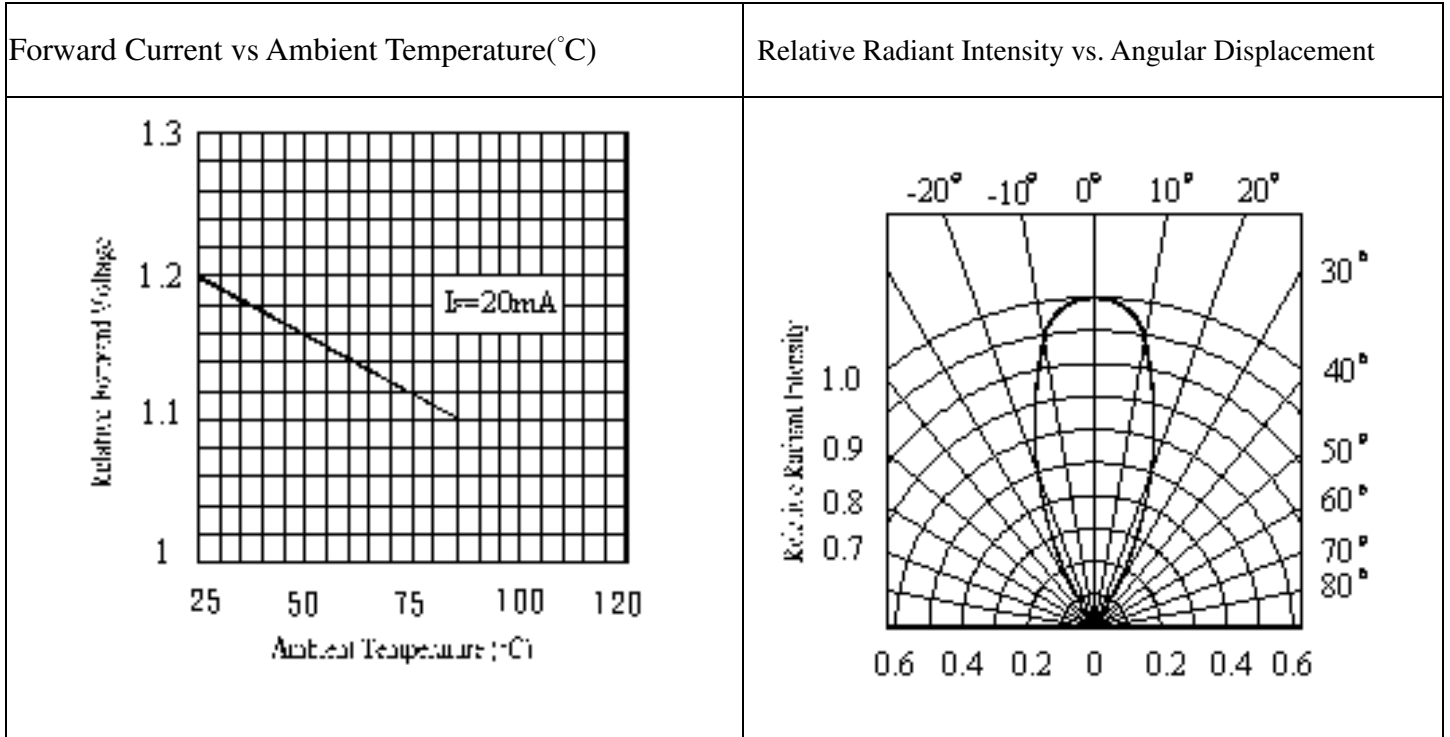


**Typical Electro/Optical/Characteristics Curves for PT**

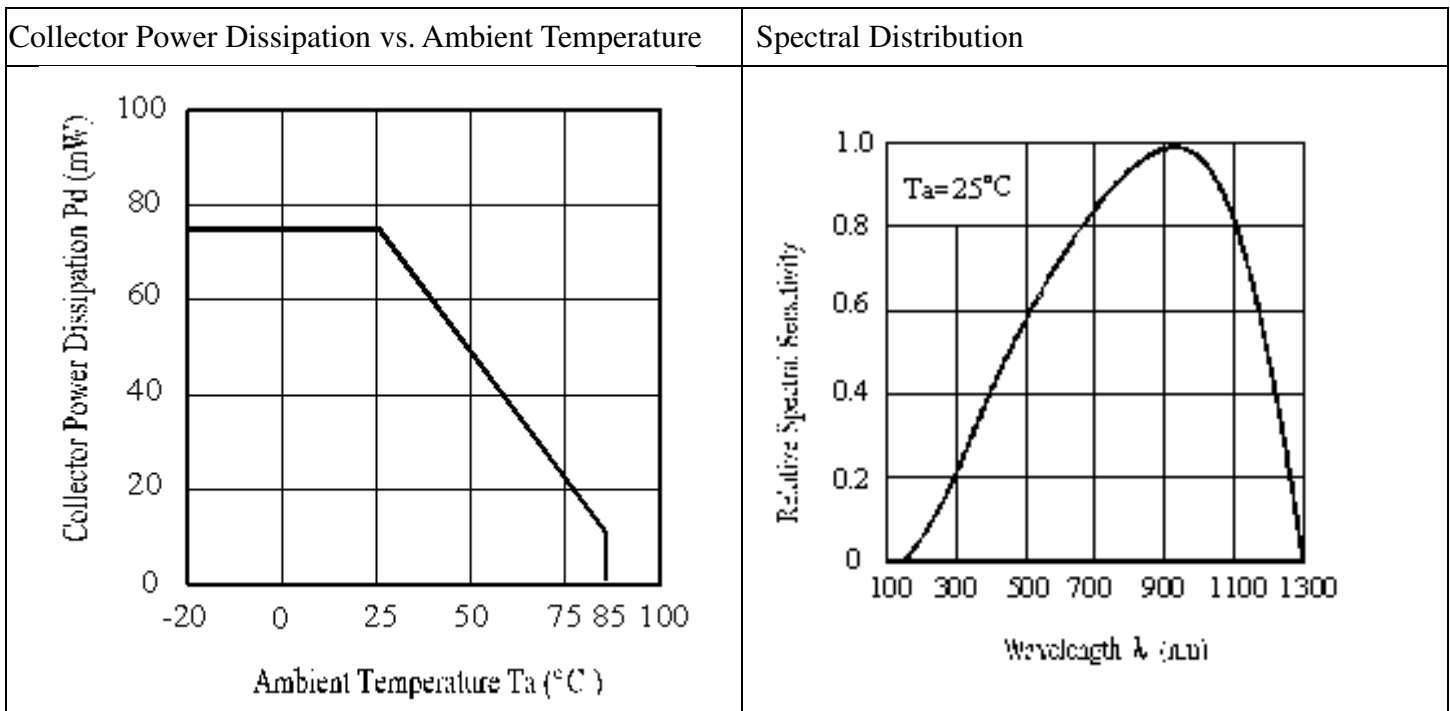


Relative Collector Current vs. Ambient Temperature

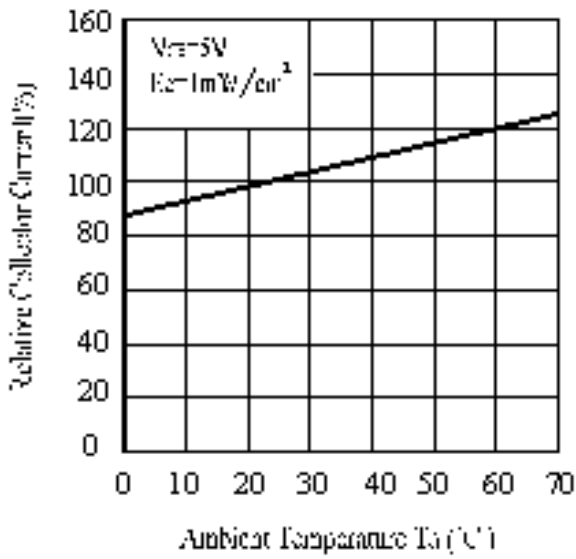


Collector Current vs. Irradiance

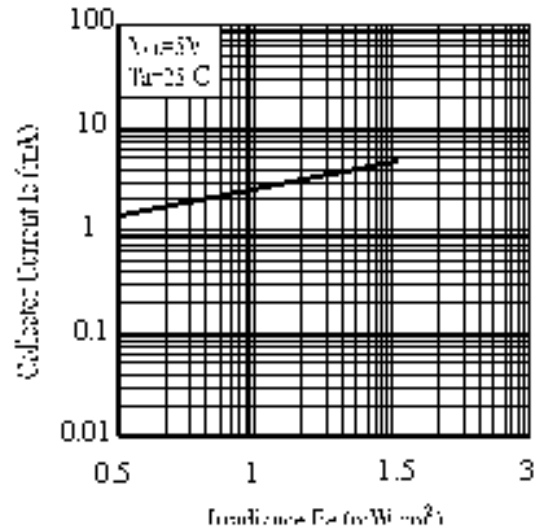

Collector Dark Current vs. Ambient Temperature

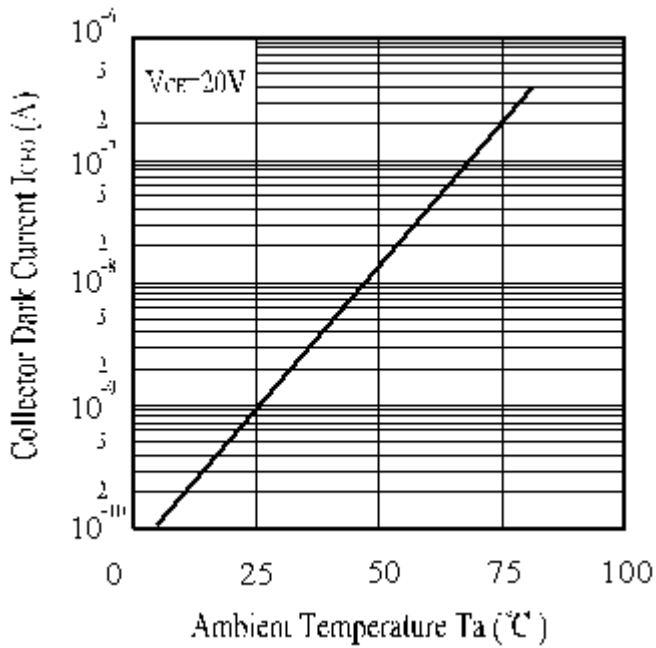

Collector Current vs. Collector-Emitter Voltage

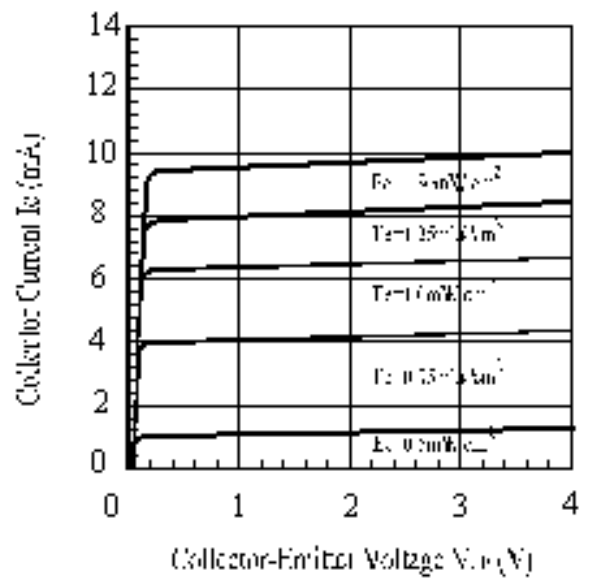

**Reliability Test Item And Condition**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

| NO. | Item                             | Test Condition  | Test Hours/<br>Cycle | Sample Size | Failure Judgement Criteria                         | Ac/Re |
|-----|----------------------------------|---|----------------------|-------------|--|-------|
| 1   | Solder Heat                      | TEMP : 260°C ± 5 °C                                       | 10 sec               | 22 PCs      | Ic(on) ≤ L×0.8<br><br>L :Lower specification limit | 0/1   |
| 2   | Temperature Cycle                | H : +100°C 15 mins<br>↑<br>5 min<br>↓<br>L : -40°C 15 min | 300 cycle            | 22 PCs      |  | 0/1   |
| 3   | Thermal Shock                    | H : +100°C 5 min<br>↑<br>10 sec<br>↓<br>L : -10°C 5 min   | 300 cycle            | 22 PCs      |  | 0/1   |
| 4   | High Temperature Storage         | TEMP. : +100°C  | 1000 hrs             | 22 PCs      |  | 0/1   |
| 5   | Low Temperature Storage          | TEMP. : -40°C   | 1000 hrs             | 22 PCs      |  | 0/1   |
| 6   | DC Operating Life                | V <sub>CE</sub> =5V<br>I <sub>F</sub> =20mA               | 1000 hrs             | 22 PCs      |  | 0/1   |
| 7   | High Temperature / High Humidity | 85°C / 85% R.H.   | 1000 hrs             | 22 PCs      |  | 0/1   |



## Package Dimension

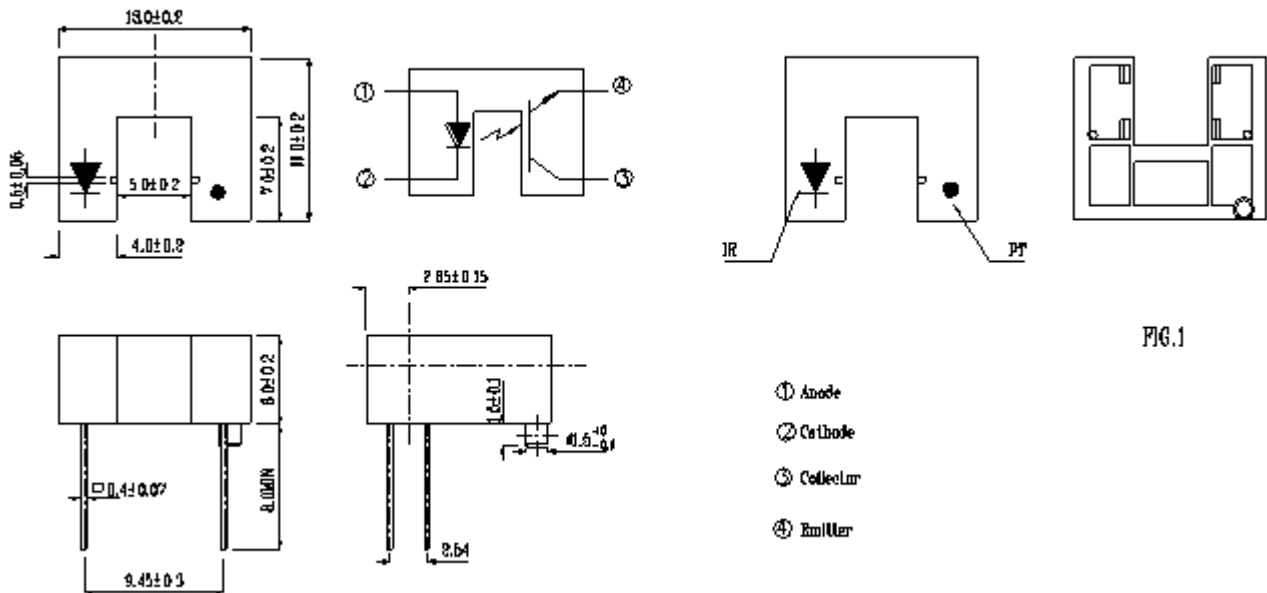


FIG.1


### Notes:

1. All dimensions are in millimeters
2. Tolerances unless dimensions  $\pm 0.2\text{mm}$
3. Lead spacing is measured where the lead emerge from the package
4. Above specification may be changed without notice. EVERLIGHT Americas will reserve authority on material change for above specification
5. These specification sheets include materials protected under copyright of EVERLIGHT Americas corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's Americas consent
6. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERIGHT Americas assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

### Packing Quantity Specification

1. 80PCS/1Plate,5Plates/1Boxe
2. 10Boxes/1Carton

### Label Form Specification

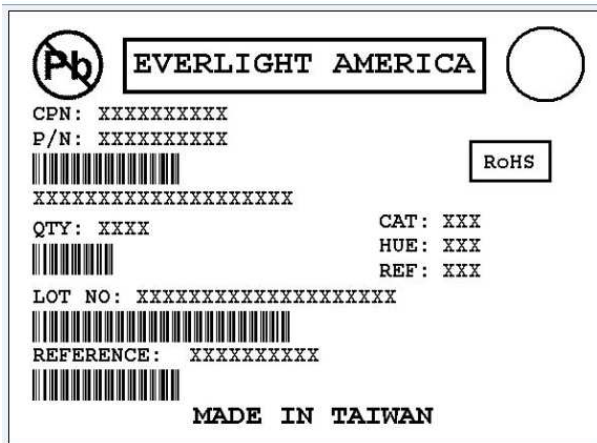

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number
- X: Month
- Reference: Identify Label Number

### Notes

1. Above specification may be changed without notice. EVERLIGHT Americas will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT Americas assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT Americas corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT Americas consent.