



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Proximity Sensors Capacitive Stainless Steel Housing Type EC, M30, DC

**TRIPLESIELD™**

**CARLO GAVAZZI**



- Featuring **TRIPLESIELD™** sensor protection
- Rated operational voltage: 10-40 VDC
- Adjustable sensing distance 2-16 mm or 4-25 mm
- Output: DC 200 mA, NPN or PNP
- Make and break switching function
- LED indication
- High noise immunity
- Flush and non-flush types
- Plug and cable versions available
- AC versions in the same housing

## Product Description

Capacitive proximity switches with either sensing distance 16 mm flush mounted or sensing distance 25 mm non-flush mounted. 4-wire DC output with both make (NO)

and break (NC) switching. M30 stainless steel housing with 2 m PVC cable or plug. Ideal for use in level and plastic machinery applications.

## Ordering Key

**EC 3025 PPA S L-1**

Capacitive proximity switch  
Housing diameter (mm)  
Rated operating dist. (mm)  
Output type  
Housing material  
Housing type  
Connection type

## Type Selection

Housing diameter	Rated operating dist. (S <sub>n</sub> ) <sup>1)</sup>	Mounting	Ordering no. Transistor NPN/cable Make & break switching	Ordering no. Transistor NPN/plug Make & break switching	Ordering no. Transistor PNP/cable Make & break switching	Ordering no. Transistor PNP/plug Make & break switching
M30	16 mm	Flush (built-in)	<b>EC 3016 NPASL</b>	<b>EC 3016 NPASL-1</b>	<b>EC 3016 PPASL</b>	<b>EC 3016 PPASL-1</b>
M30	25 mm	Non-flush	<b>EC 3025 NPASL</b>	<b>EC 3025 NPASL-1</b>	<b>EC 3025 PPASL</b>	<b>EC 3025 PPASL-1</b>



<sup>1)</sup> Object: Grounded steel plate

## Specifications

<b>Rated operating dist. (S<sub>n</sub>)</b> 3016:	2 to 16 mm factory set at 16 mm	<b>Frequency of operating cycles (f)</b>	50 Hz
3025:	4 to 25 mm factory set at 25 mm	<b>Indication for output ON</b>	LED, yellow
<b>Sensitivity</b>	Adj. multiturn pot.meter	<b>Environment</b> Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
<b>Effective operating dist. (S<sub>r</sub>)</b>	0.9 x S <sub>n</sub> ≤ S <sub>r</sub> ≤ 1.1 x S <sub>n</sub>	<b>Temperature</b> Operating temperature	-25° to +80°C (-13° to +176°F)
<b>Usable operating dist. (S<sub>u</sub>)</b>	0.8 x S <sub>r</sub> ≤ S <sub>u</sub> < 1.2 x S <sub>r</sub>	Storage temperature	-40° to +85°C (-40° to +185°F)
<b>Repeat accuracy (R)</b>	≤ 5%	<b>Housing material</b> Body	Stainless steel (St 304)
<b>Hysteresis (H)</b>	3 to 20% of sensing distance	Front	Grey, polyester
<b>Rated operational volt. (U<sub>B</sub>)</b>	10 to 40 VDC (ripple included)	Cable end	Polyester
<b>Ripple</b>	≤ 10%	Nuts	Nickel plated brass
<b>Rated operational current (I<sub>o</sub>)</b> Continuous	≤ 200 mA	<b>Connection</b> Cable	Grey, 2 m, 4 x 0.34 mm <sup>2</sup> Oil proof, PVC
<b>No-load supply current (I<sub>o</sub>)</b>	≤ 10 mA (no load)	Plug (-1)	M12 x 1
<b>Voltage drop (U<sub>d</sub>)</b>	≤ 2.5 VDC at max. load	Cable for plug (-1)	CON.1A-series
<b>Protection</b>	Reverse polarity, short-circuit, transients	<b>Weight (incl. nuts)</b>	<b>3016:</b> 140 g <b>3025:</b> 150 g
		<b>Approvals</b>	UL
		<b>CE-marking</b>	Yes





## Dimensions

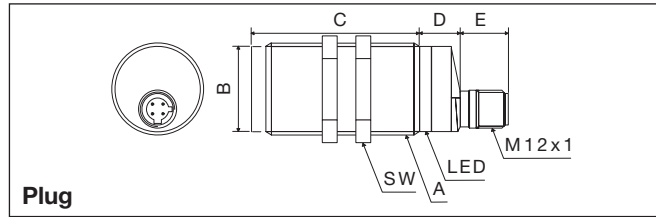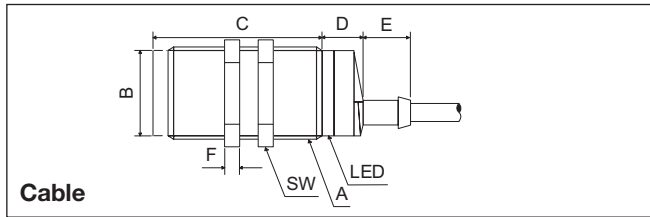

Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
EC 3016xPASL(-1)	M30 x 1.5 x 50	28	50	13.6	15.4	5	36
EC 3025xPASL(-1)	M30 x 1.5 x 50	28	62	13.6	15.4	5	36

## Wiring Diagrams

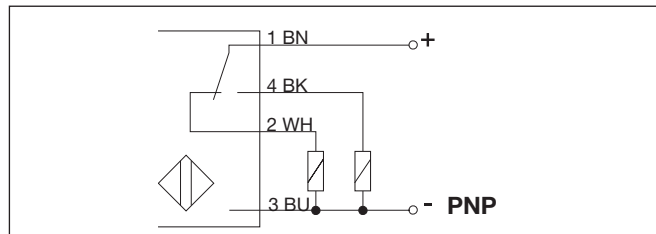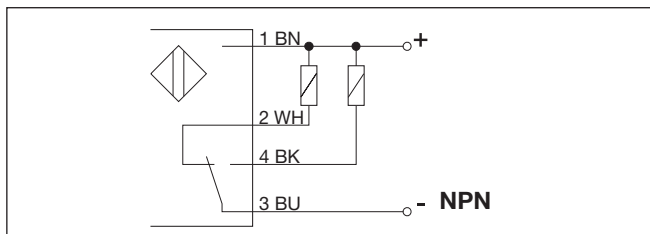


## Adjustment Guide

The environments in which capacitive sensors are installed can often be unstable regarding temperature, humidity, object distance and industrial (noise) interference. Because of this, Carlo Gavazzi offers as standard features in all TRIPLESIELD™ capacitive sensors a user-friendly sensitivity adjustment instead of having a fixed sensing range,

extended sensing range to accommodate mechanically demanding areas, temperature stability to ensure minimum need for adjusting sensitivity if temperature varies and high immunity to electromagnetic interference (EMI).

**Note:** Sensors are factory set (default) to maximum rated sensing range.

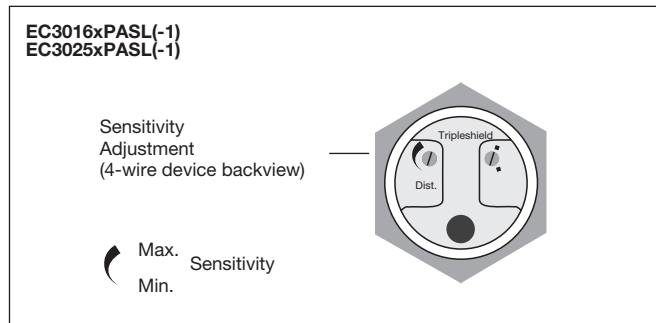

## Installation Hints

Capacitive sensors have the unique ability to detect almost all materials, either in liquid or solid form. Capacitive sensors can detect metallic as well as non-metallic objects, however, their traditional use is for non-metallic materials such as:

• **Plastic Industry**

Resins, regrinds or moulded products.

• **Chemical Industry**

Cleanders, fertilisers, liquid soaps, corrosives and petrochemicals.

• **Wood Industry**

Saw dust, paper products, door and window frames.

• **Ceramic & Glass Industry**

Raw material, clay or finished products, bottles.






• **Packaging Industry**

Package inspection for level or contents, dry goods, fruits and vegetables, dairy products.

Materials are detected due to their dielectric constant. The bigger the size of an object, the higher the density of material, the better or easier it is to detect the object. Nominal sensing distance for a capac-

itive sensor is referenced to a grounded metal plate (ST37). For additional information regarding dielectric ratings of materials please refer to Technical Information.

## Installation Hints (cont.)
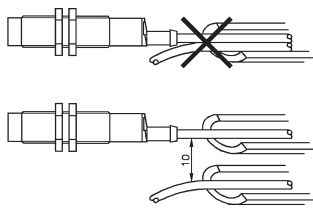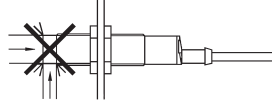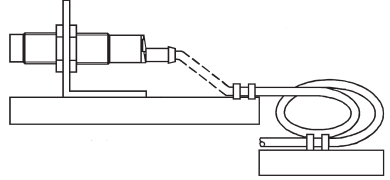
<p>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</p> 	<p>Relief of cable strain</p> <p>Incorrect</p>  <p>Correct</p>  <p>The cable should not be pulled</p>	<p>Protection of the sensing face</p>  <p>A proximity switch should not serve as mechanical stop</p>	<p>Switch mounted on mobile carrier</p>  <p>Any repetitive flexing of the cable should be avoided</p>
---	---	--	--

## Delivery Contents

- Capacitive switch: EC 30.. PASL(-1)
- Screw driver
- 2 nuts
- **Packaging:** Cardboard box
- Installation & Adjustment Guide

## Accessories

- Plugs CON.1A.. serie