



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



INDUSTRIAL REMOTE ACCESS GATEWAY

Highlights

- Integrated WiFi or Cellular options, including 4G versions for Europe (EU) or North America (NA)
- Firewall friendly outbound connection
- Standard ports used: 443 (HTTPS), 1194 (UDP)
- Possible to configure the Digital Inputs to control internet connection with external key switch or to send alarm notification
- SD card option for easy commissioning
- USB connectivity for micro-PLCs
- 24 VDC power supply and DIN rail mount

Typical Applications


- Remote access to PLC, IPC, HMI or IP camera
- PLC remote Service and Support



The eWON Cosy is an industrial remote access gateway that is designed to offer scalable and secure remote access to machines in the factory.

Machine Builders, Line Builders, and System Integrators can troubleshoot machines, debug PLC programs, upload projects, and gain remote control of an HMI or an IP camera, all without going on site. This drastically reduces support costs for them and their customers.

The eWON Cosy establishes a secure VPN connection from the machine to anywhere in the world via Talk2M, a cloud-based remote connectivity solution. The router seamlessly communicates on the local area network with the PLC and the HMI, and allows remote connection from a computer, tablet, or smartphone. eWON Cosy and Talk2M make connectivity easy, and don't require the user to be an IT expert to take advantage of the time and cost saving advantages.

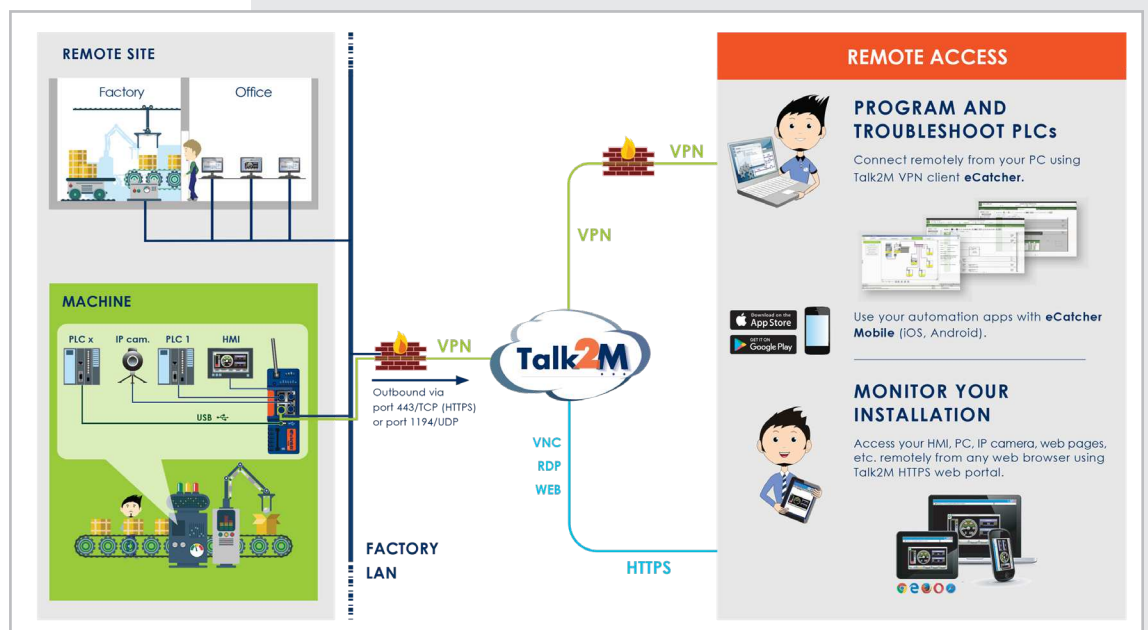



Standards & Directives

WAN Ethernet	Up to 3 ports, 10/100 Mb Ethernet
LAN Ethernet	Up to 4 ports, 10/100Mb Ethernet
Field interface	Up to 10 USB 2.0 connections, female connector 2.0
SD card reader	YES, for Cosy commissioning (firmware upgrade, backup, Talk2M registration)
Router	IP filtering, IP forwarding, NAT, Port forwarding, Proxy, Routing table, DHCP client/server
Internet	Outbound connection for Talk2M using HTTPS (port 443 or UDP 1194)
VPN Tunneling	OpenVPN either in SSL UDP or HTTPS
Talk2M	Talk2M Free+ or Talk2M Pro, natively supported
VPN Security	Communications between the remote user and the eWON are fully encrypted using the SSL/TLS protocol, thereby ensuring data authenticity, integrity & confidentiality. All users and eWON units are authenticated using x509 SSL certificates and end-to-end traffic is encrypted using strong symmetric & asymmetric algorithms that are part of the SSL/TLS protocol cipher suite.
Synchronization	Embedded real-time clock, manual setup via HTTP or automatic via NTP
File Management	FTP server for configuration, firmware update
Web-based configuration	Embedded web interface with setup wizards for configuration and maintenance (no additional software needed). Basic authentication (login/password) and session control for security.
Mechanicals	Dimensions: 108 x 99 x 42 mm (H x D x W) Weight: 191 gr DIN rail or wall screw fixing system
Power supply	12-24 VDC +/-20%, LPS
Extended Temperature Range	Operating: -25°C to +70°C, 10 to 95% relative humidity (non-condensing) Storage: -40°C to +70°C, 10 to 95% relative humidity (non-condensing)
Hardware	1xDO: open drain (MOSFET) 200mA; isolation 1.5kV, 2xDI: 0 to 24VDC; 1.5 kV isolation
Marking	CE, cULus listed, FCC
Warranty	36 months

Features for the EC6133G (cellular 4G EU)

Bands	4G: B1, B3, B7, B8, B20 3G: B1, B8 Automatic fallback to 3G
Antenna Connector	Type SMA - Female
Antenna	not included in the delivery
Weight	202 gr

Features for the EC6133H (cellular 4G NA)

Bands	4G: B2, B4, B5, B12/B13 3G: B2, B5 Automatic fallback to 3G
Antenna Connector	Type SMA - Female
Antenna	not included in the delivery
Weight	202 gr

Features for the EC6133D (cellular 3G)

Frequencies	GSM/GPRS/EDGE Quad-Band (850, 900, 1800, 1900 MHz) - HSPA+ UMTS Pentaband module (800/850, 900, AWS 1700, 1900, 2100 MHz)
Antenna Connector	Type SMA - Female
Antenna	not included in the delivery
Weight	202 gr

Features for the EC 6133C (WiFi)

WAN Connectivity	Ethernet or WiFi 802.11 b/g/n
Frequencies	Channels: 1 to 11 (inclusive)
Security	WPA2, WPA and WEP
Antenna Connector	RP-SMA female connector
Antenna	Included in the delivery; frequency: 2.4GHz; impedance: 50 Ohms, gain: 2.0dBi
Weight	199 gr

Standards & Directives

Type tests	<p>Temperature - Operating & Storage tested according to:</p> <ul style="list-style-type: none"> IEC 60068-2-1 Cold test IEC 60068-2-2 Dry heat test IEC 60068-2-14 Change of temperature IEC 60068-2-30 Cyclic damp heat test <p>Vibration & shocks tested according to:</p> <ul style="list-style-type: none"> IEC 60068-2-27 Bumps IEC 60068-2-64 Vibration (broad-band random) IEC 60068-2-6 Vibration (sinusoidal)
CE	<p>Compliant with:</p> <ul style="list-style-type: none"> EMC directive 2014/30/EU RE directive 2014/53/EU RoHS directive 2011/65/EU REACH regulation 1907/2006 <p>According to standards:</p> <ul style="list-style-type: none"> EMC: ITE; emission Class A EN55032; EN55024 EN301489-1; EN301489-7; EN301489-17; EN301489-24; EN301489-52 <p>Spectrum:</p> <ul style="list-style-type: none"> EN301511; EN301908-1 & -2 EN300328 <p>Health: EN62311</p> <p>Safety: EN60950</p>
FCC	Compliant with CFR 47, part 15B Class A; 15C; 22H; 24E; 27
IC	Compliant with IC (Industry Canada) RSS-132; RSS-133; RSS-139; RS-210
Japan	This equipment has the Type Approval Certification based on the Radio Law

Safety**Conform to:**

EN60950-1; UL60950-1; CSA-C22.2 n° 60950-1-07

UL listed: file number# 350576

CB Certificate n° DK-42240-A1-UL

Part Number**Description**

EC61330	Industrial Gateway COSY131 WAN/LAN/USB
EC6133C	Industrial Gateway COSY131 WAN/LAN/USB + WIFI
EC6133D	Industrial Gateway COSY131 WAN/LAN/USB + Cellular 3G
EC6133G	Industrial Gateway COSY131 WAN/LAN/USB + Cellular 4G EU
EC6133H	Industrial Gateway COSY131 WAN/LAN/USB + Cellular 4G NA

HMS - Sweden (HQ)Tel : +46 35 17 29 00 (Halmstad HQ)
E-mail: sales@hms-networks.com**HMS - Belgium (eWON)**Tel: +32 67 895 800
E-mail: ewon@hms-networks.com**HMS - China**Tel : +86 010 8532 3183
E-mail: cn-sales@hms-networks.com**HMS - France**Tel: +33 (0) 67 88 02 50 (Mulhouse office)
E-mail: fr-sales@hms-networks.com**HMS - Germany**Tel: +49 721 989777-000
E-mail: ge-sales@hms-networks.com**HMS - India**Tel: +91 83800 66578
E-mail: in-sales@hms-networks.com**HMS - Italy**Tel : +39 039 59662 27
E-mail: it-sales@hms-networks.com**HMS - Japan**Tel: +81 45 478 5340
E-mail: jp-sales@hms-networks.com**HMS - Switzerland**Tel: +41 61 511342-0
E-mail: sales@hms-networks.ch**HMS - UK**Tel: +44 1926 405599
E-mail: uk-sales@hms-networks.com**HMS - United States**Tel: +1 312 829 0601
E-mail: us-sales@hms-networks.com
