



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
K	3369	UPDATE MIN PIN HOLE SIZE TO .043 FOR ALL TERMINATIONS	1/19/2016	MG
L	3577	ADD 02 & 03 POS TO DIM TABLE	12/7/2016	MG
M	3652	REMOVE 'A' MATERIAL, ADD 'Q' MATERIAL, UPDATE 'R' MATERIAL OPERATING TEMPERATURE, REMOVE 'Y' & 'S' PLATING	4/6/2017	EP

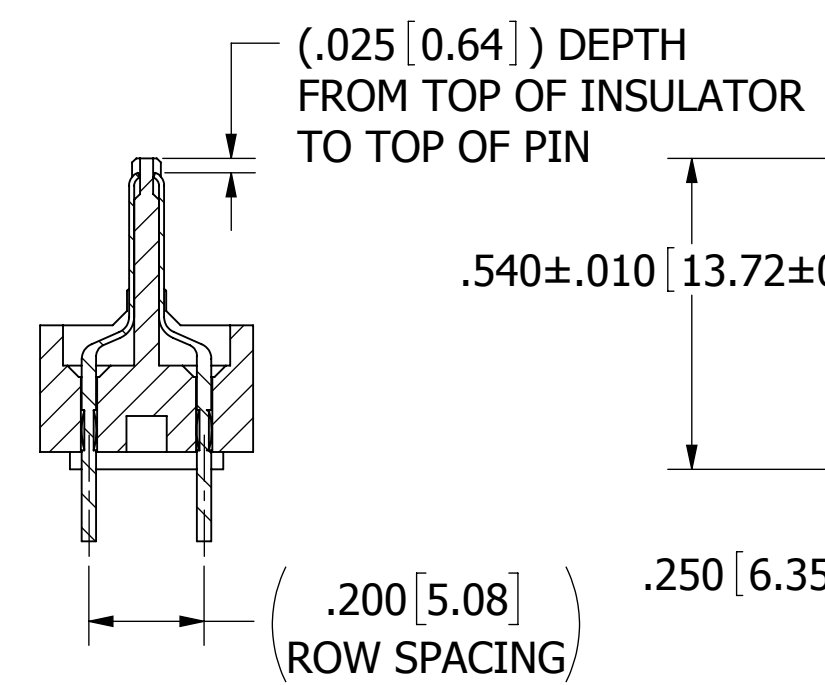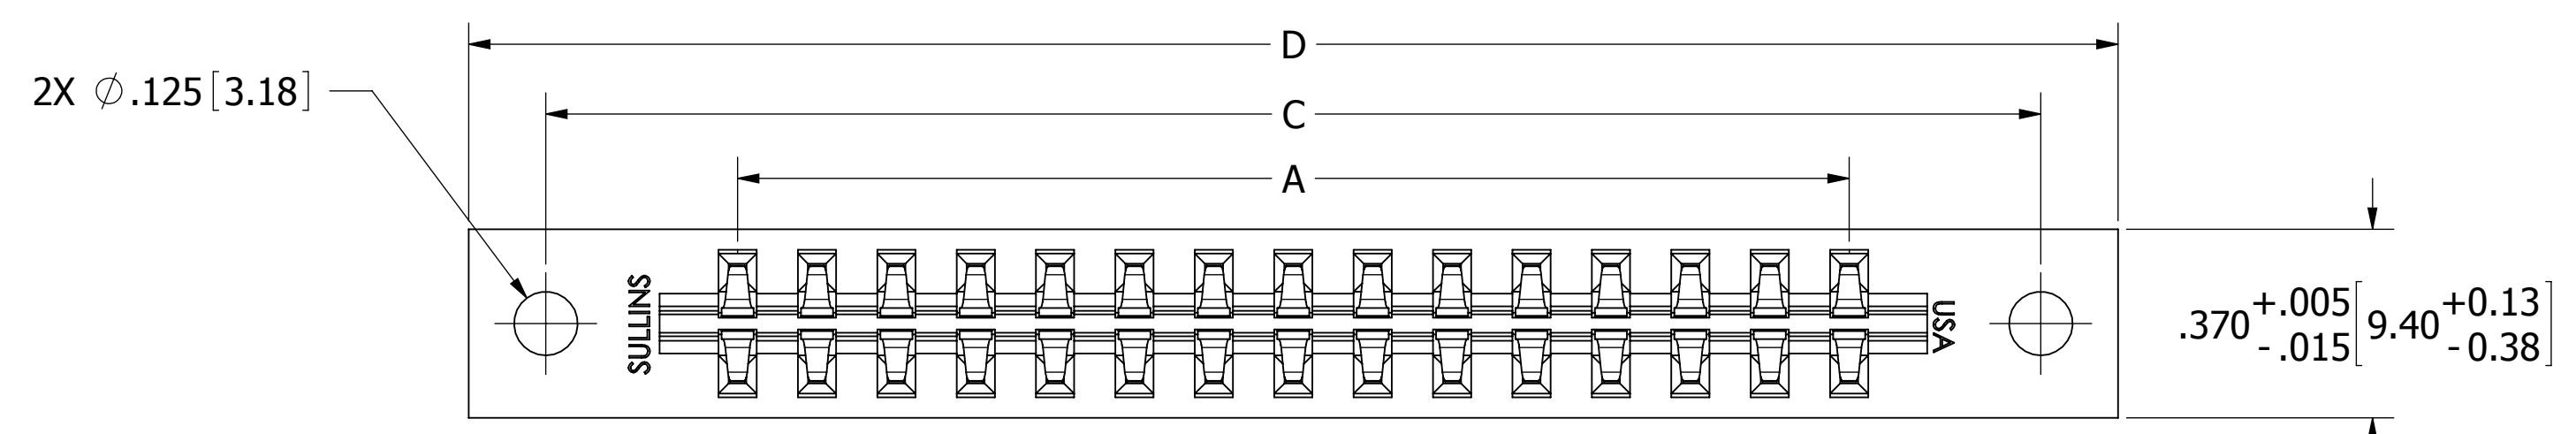


SECTION A-A

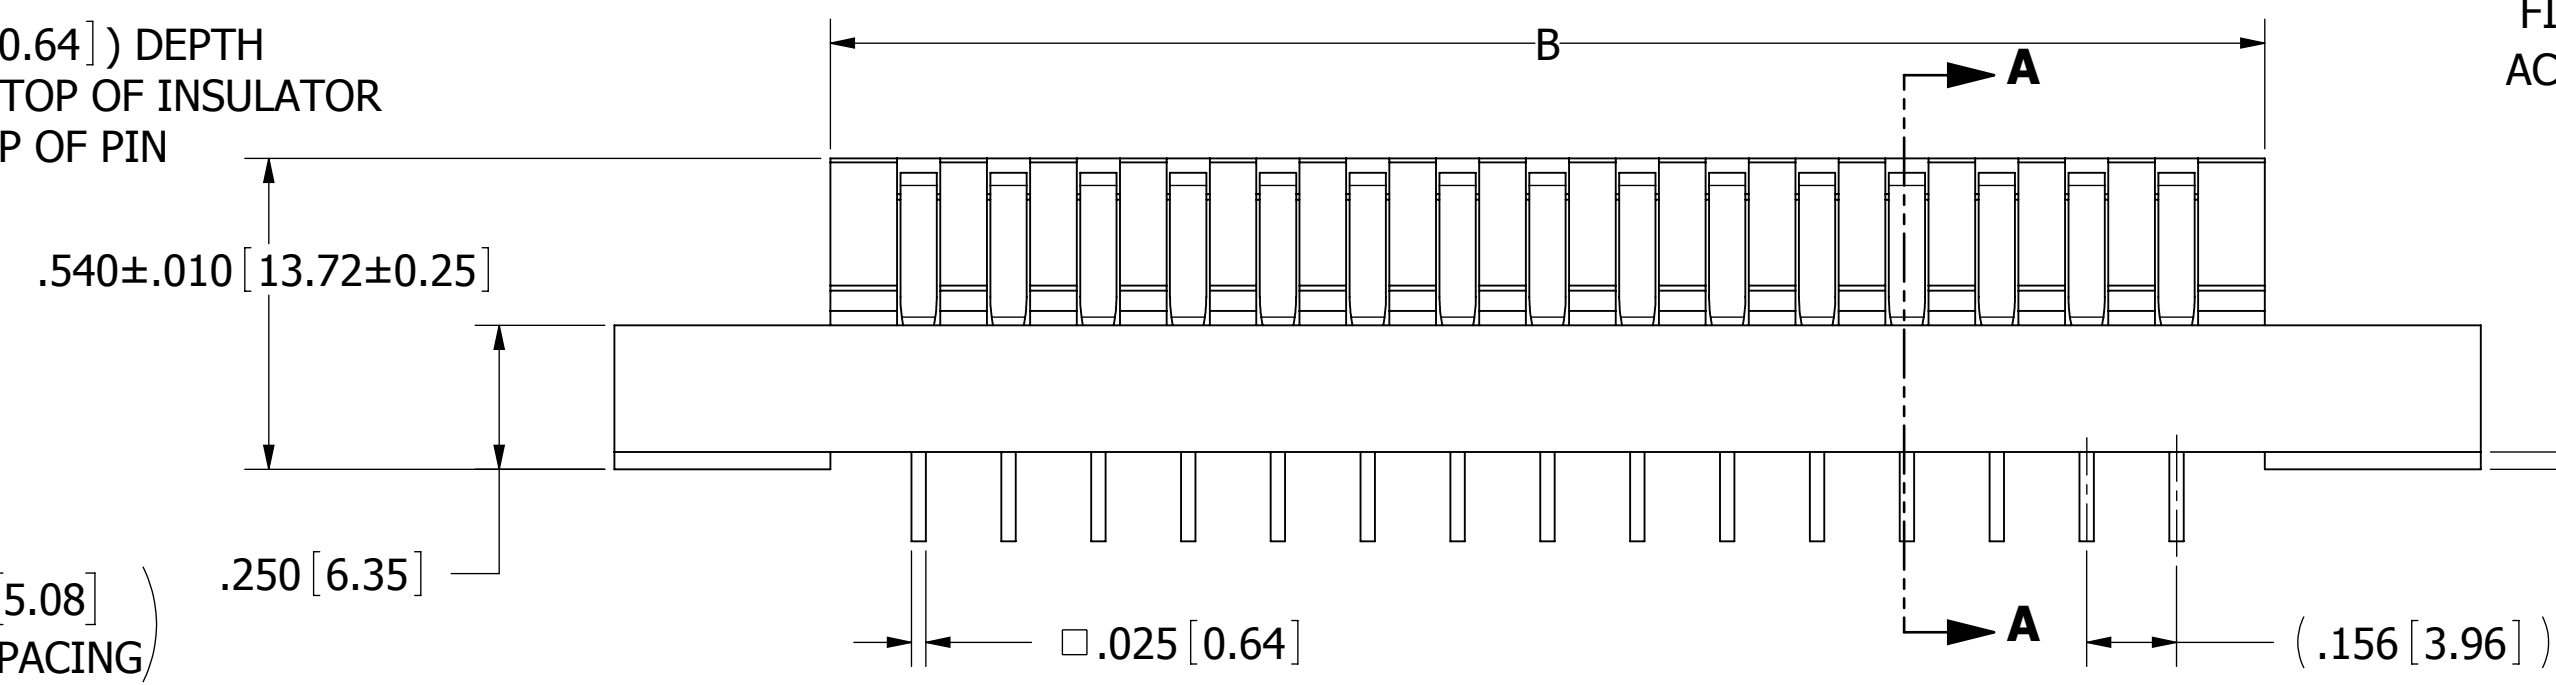

--M_M_D

FITS EDGECARDS THAT ACCEPT .062 [1.57] PCB's

MW = .125 ± .025 [3.18 ± 0.64]
 MS = .190 ± .025 [4.83 ± 0.64]
 MM = .560 ± .025 [14.22 ± 0.64]

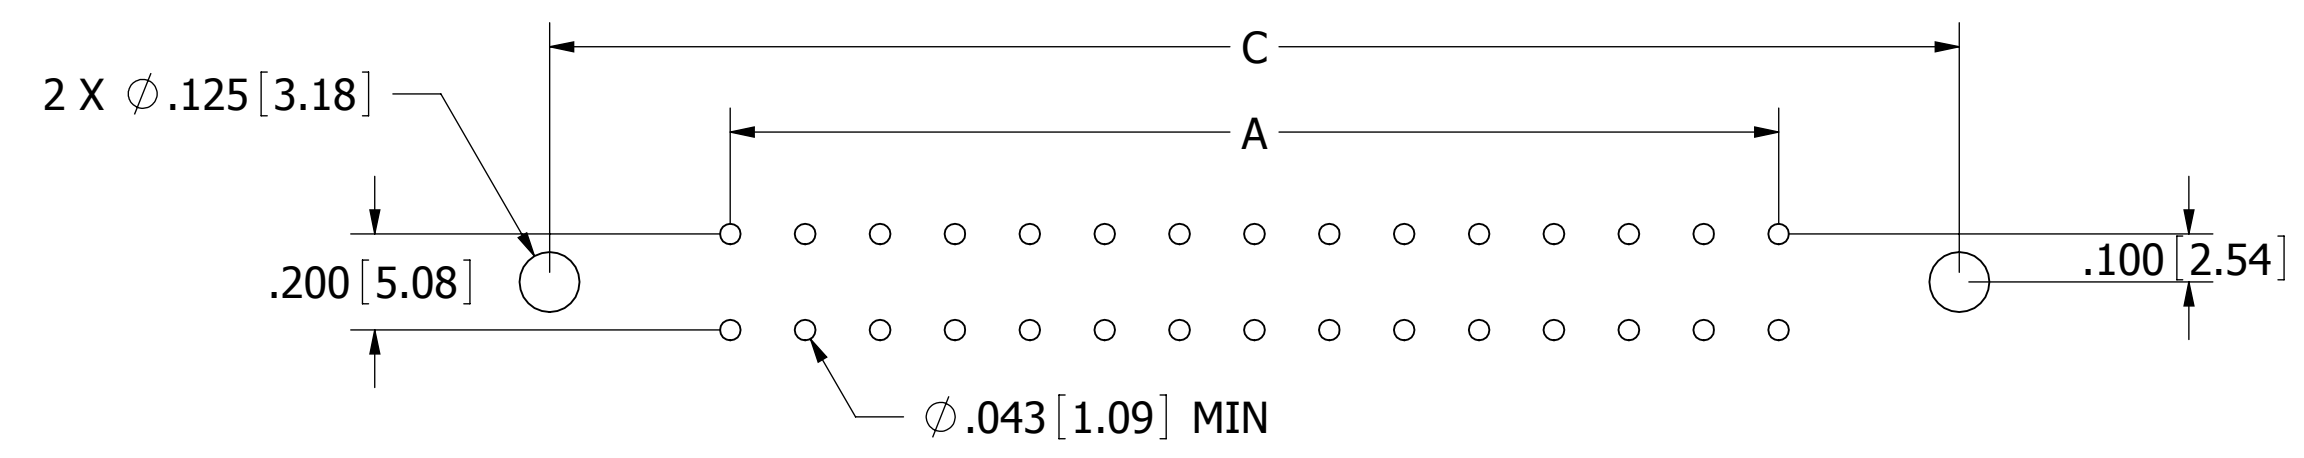

RECOMMENDED PCB LAYOUT

CUSTOMER COPY

- NOTES:
1. INSULATOR MATERIAL: SEE PART NUMBER CODING
 2. CONTACT MATERIAL: SEE PART NUMBER CODING
 3. PLATING: SEE PART NUMBER CODING
 4. OPERATING TEMPERATURE: SEE PART NUMBER CODING
 5. PROCESSING TEMP: SEE PART NUMBER CODING
 6. UL FLAMMABILITY RATING: 94V-0
 7. OPERATING VOLTAGE: 950 VAC
 8. CURRENT RATING: 3 AMP
 9. CONTACT RESISTANCE: 30 MILLI OHMS MAX
 10. INSULATION RESISTANCE: 5000 MEGA OHMS
 11. CONNECTOR IDENTIFICATION: PART SHALL BE MARKED WITH A PART NUMBER AND LOT CODE



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]

TOLERANCES:
 ANGULAR: ± 1°
 DECIMALS
 .XX = ± .02 [.5]
 .XXX = ± .005 [.13]
 .XXXX = ± .0005 [.013]



DRAWN	DATE	NAME
	03/14/08	MNH
THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.		
TITLE MALE, EDGE CARD, .156 CC		
PART NUMBER _M_M(MW,MS,MM)_		
SIZE C	CAGE CODE 54453	DWG. NO. C11075
SCALE: 3:1	SHEET 1 OF 3	

TITLE MALE, EDGE CARD, .156 CC	
PART NUMBER _M_M(MW,MS,MM)_	
SIZE C	CAGE CODE 54453
DWG. NO. C11075	REV M
SCALE: 3:1	
SHEET 1 OF 3	

8 7 6 5 4 3 2 1



F
E
D
C
B
A

F
E
D
C
B
A

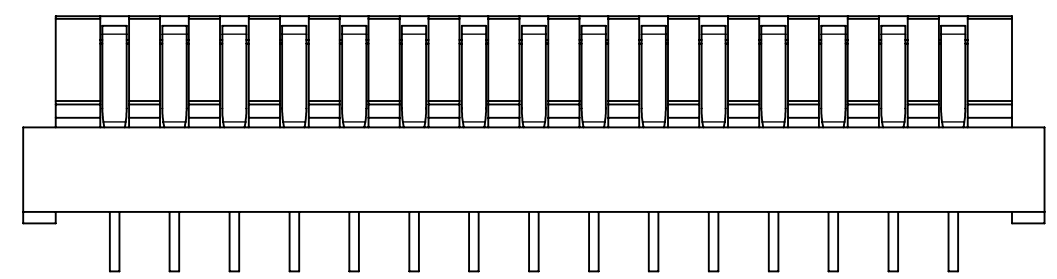
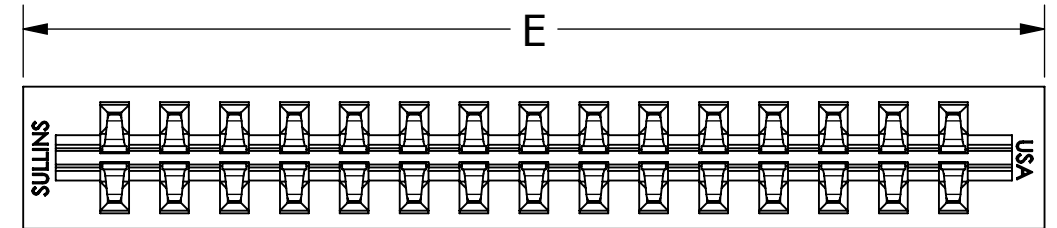


__M_M_N



2X #4-40
THREADED
INSERTS

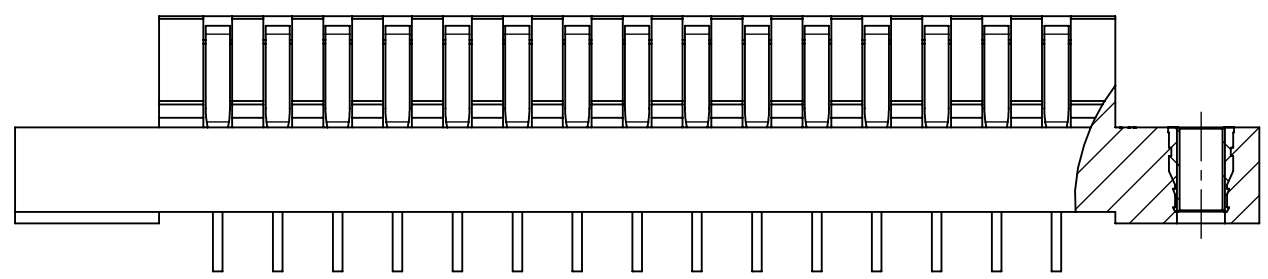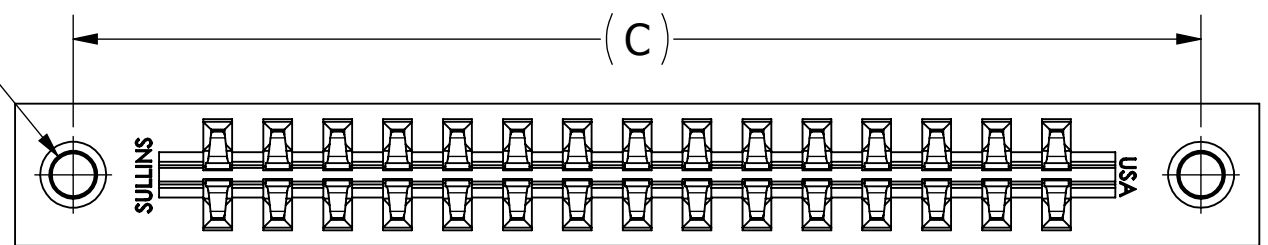

__M_M_T

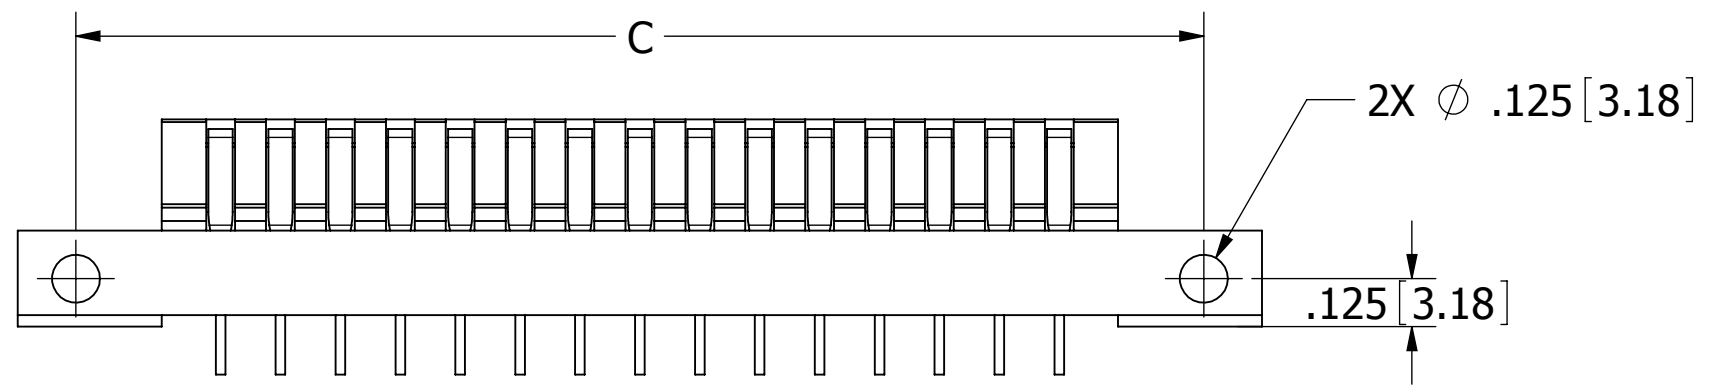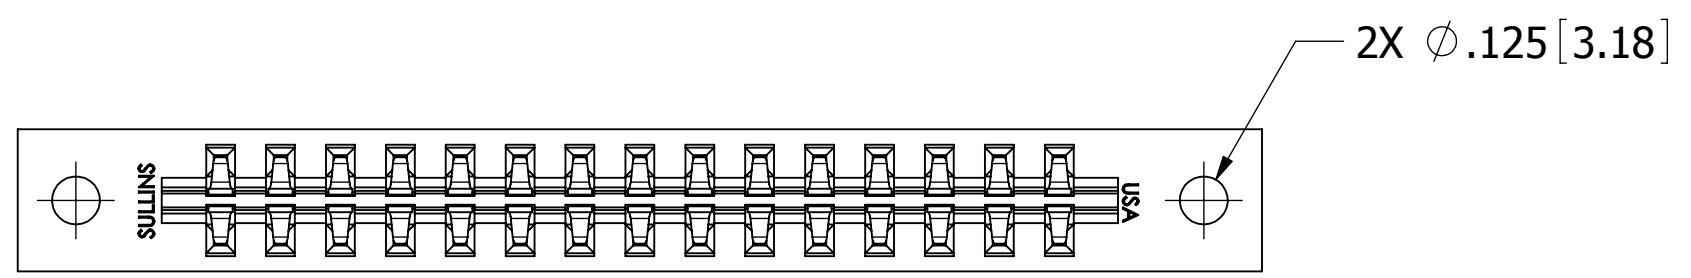

__M_M_Z

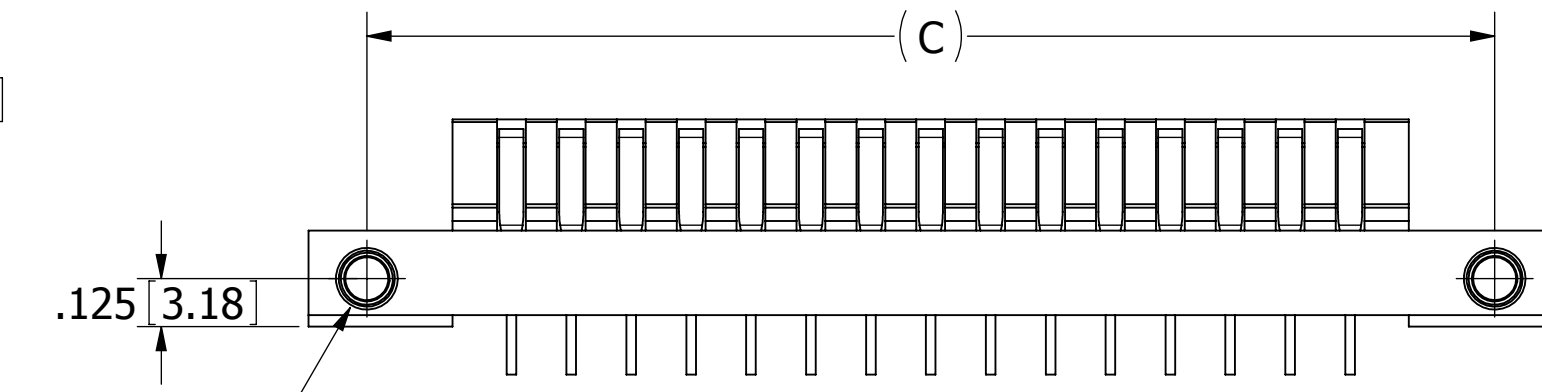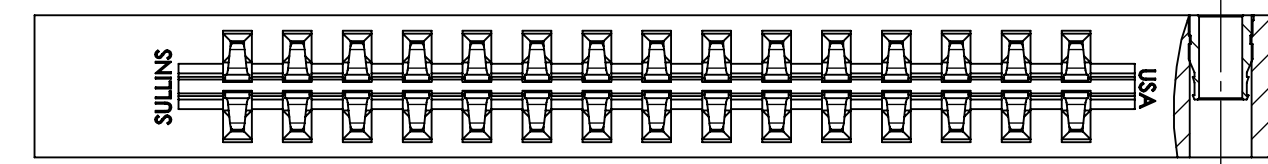

2X #4-40
THREADED
INSERTS

__M_M_V

CUSTOMER COPY



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]

TOLERANCES:
ANGULAR: ± 1°

DECIMALS
.XX = ± .02 [.5]
.XXX = ± .005 [.13]
.XXXX = ± .0005 [.013]

DRAWN DATE NAME
03/14/08 MNH

THE INFORMATION HEREIN CONTAINS
PROPRIETARY INFORMATION OF
SULLINS ELECTRONICS AND IS NOT
TO BE REPRODUCED, USED OR
DISCLOSED TO OTHERS FOR ANY
PURPOSE EXCEPT AS SPECIFICALLY
AUTHORIZED IN WRITING BY AN
OFFICER OF SULLINS ELECTRONICS.



TITLE MALE, EDGE CARD, .156 CC			
PART NUMBER __M_M(MW,MS,MM)_			
SIZE C	CAGE CODE 54453	DWG. NO. C11075	REV M
SCALE: 2:1		SHEET 2 OF 3	

8 7 6 5 4 3 2 1

