



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ECP180 Series

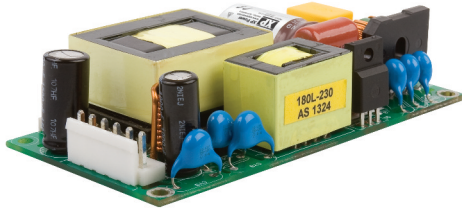

GREEN XP POWER

- Low 1" Profile with 2" x 4" Footprint
- 120 W Convection / 180 W Forced-cooled
- High Efficiency – up to 95%
- Medical & ITE Approvals
- Class I & Class II Applications
- <0.5 W No Load Input Power
- 3 Year Warranty

Specification

Input

Input Voltage	• 85-264 VAC, derate from 120 W at 100 VAC to 110 W at 90 VAC and 100 W at 85 VAC when convection cooled
Input Frequency	• 47-63 Hz
Input Current	• 1.8 A typical at 115 VAC, 0.9 A typical at 230 VAC
Inrush Current	• 120 A max at 230 VAC, cold start at 25 °C
Power Factor	• >0.95 at full load
Earth Leakage Current	• <230 µA at 264 VAC, 60 Hz
No Load Input Power	• <0.5 W
Input Protection	• Internal T3.15A/250VAC fitted in line and neutral

Output

Output Voltage	• See tables
Initial Set Accuracy	• 1% at 50 % load
Minimum Load	• No minimum load requirement
Start Up Delay	• 1 s max
Start Up Rise Time	• 55 ms typical
Hold Up Time	• 10 ms minimum at full load and 115 VAC 16 ms typical at 120 W
Line Regulation	• ±0.5% max
Load Regulation	• ±0.5% max
Transient Response	• 4% maximum deviation, recovering to less than 1% within 500 µs for 25% step load
Ripple & Noise	• 1% max pk-pk, 20 MHz bandwidth, (see note 2)
Overvoltage Protection	• 110% - 140% of nominal voltage on main output. Recycle mains to reset.
Overload Protection	• 110-160%
Short Circuit Protection	• Trip and restart (hiccup)
Thermal Protection	• Measured internally. Auto resetting.
Temperature Coefficient	• 0.02%/°C
Fan Supply	• 12 V at 500 mA

General

Efficiency	• See table
Isolation	• 4000 VAC Input to Output 1500 VAC Input to Ground 1500 VAC Output to Ground
Protection Level	• Primary to Secondary: 2 MOPP Primary to Earth: 1 MOPP Secondary to Earth: 1 MOPP
Power Density	• 15/22 W/in ³ convection/forced-cooled
Switching Frequency	• PFC: 70-130 KHz, PWM: 50-90 KHz
MTBF	• >300 kHrs to MIL-HDBK-217F at 25 °C, GB

Environmental

Operating Temperature	• -20 °C to +70 °C derate from 100% load at 50 °C to 50% load at 70 °C
Cooling	• Convection cooled: 120 W Forced cooled: 180 W with 10 CFM
Operating Humidity	• 5% to 90% RH, non condensing
Operating Altitude	• 5000 m
Storage Temperature	• -40 °C to +85 °C
Shock	• IEC68-2-27, 30 g, 11 ms half sine, 3 times in each of 6 axes
Vibration	• IEC68-2-6, 10-500 Hz, 2 g 10 mins / sweep. 60 mins for each of 3 axes

EMC & Safety

Emissions	• EN55022/11, Level B conducted & Level A radiated
Harmonic Currents	• EN61000-3-2 Class A
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, ±8 kV air, ±4 kV contact, Perf Criteria A
Radiated Immunity	• EN61000-4-3, 3 V/m, Perf Criteria A
EFT/Burst	• EN61000-4-4, level 3, Perf Criteria A
Surge	• EN61000-4-5, installation class 3, Perf Criteria A
Conducted Immunity	• EN61000-4-6, 3 V, Perf Criteria A
Dips & Interruptions	• EN55024, 100% 10 ms, 30%, 500 ms, 100%, 5000 ms Perf Criteria A, A, B for high line, A, B, B for low line at full load, EN60601-1-2, 30% 500 ms, 60% 100 ms, 100% 10 ms, 100% 5000 ms, Perf Criteria A, A, A, B for high line, A, B, A, B for low line at full load
Safety Approvals	• UL60950-1, IEC60950-1, EN60950-1, ANSI/AAMI ES 60601-1, IEC60601-1, EN60601-1

Models and Ratings

Output Voltage	Output Current		Ripple and Noise pk-pk ⁽²⁾	Fan Output	Efficiency ⁽³⁾	Model Number ⁽⁴⁾
	Convection-cooled	Forced-cooled ⁽¹⁾				
12.0 V	10.00 A	15.00 A	120 mV	12 V/0.5 A	92%	ECP180PS12
15.0 V	8.00 A	12.00 A	150 mV	12 V/0.5 A	92%	ECP180PS15
24.0 V	5.00 A	7.50 A	240 mV	12 V/0.5 A	93%	ECP180PS24
28.0 V	4.30 A	6.43 A	280 mV	12 V/0.5 A	93%	ECP180PS28
36.0 V	3.33 A	5.00 A	360 mV	12 V/0.5 A	94%	ECP180PS36
48.0 V	2.50 A	3.75 A	480 mV	12 V/0.5 A	94%	ECP180PS48

Notes

- Requires 10 CFM.
- Measured with 20 MHz bandwidth and 10 μ F electrolytic capacitor in parallel with 0.1 μ F ceramic capacitor
- Minimum average efficiencies measured at 25%, 50%, 75% & 100% of 180 W load and 230 VAC input.

Mechanical Details

CN1 - Input Connector	
Pin 1	Neutral
Pin 2	Not Fitted
Pin 3	Line

Mates with JST housing
VHR-3N and JST Series
SVH-21T-P1.1 crimp terminals


Mounting holes marked with \oplus must be connected to safety earth

CN2 - Output Connector	
Pin 1	-Vout
Pin 2	-Vout
Pin 3	-Vout
Pin 4	+Vout
Pin 5	+Vout
Pin 6	+Vout

Mates with JST housing
VHR-6N and JST Series
SVH-21T-P1.1 crimp terminals

CN3 - Fan Connector	
Pin 1	Fan -
Pin 2	Fan +

Mates with Molex housing
22-01-1022 and 2759 crimp terminals

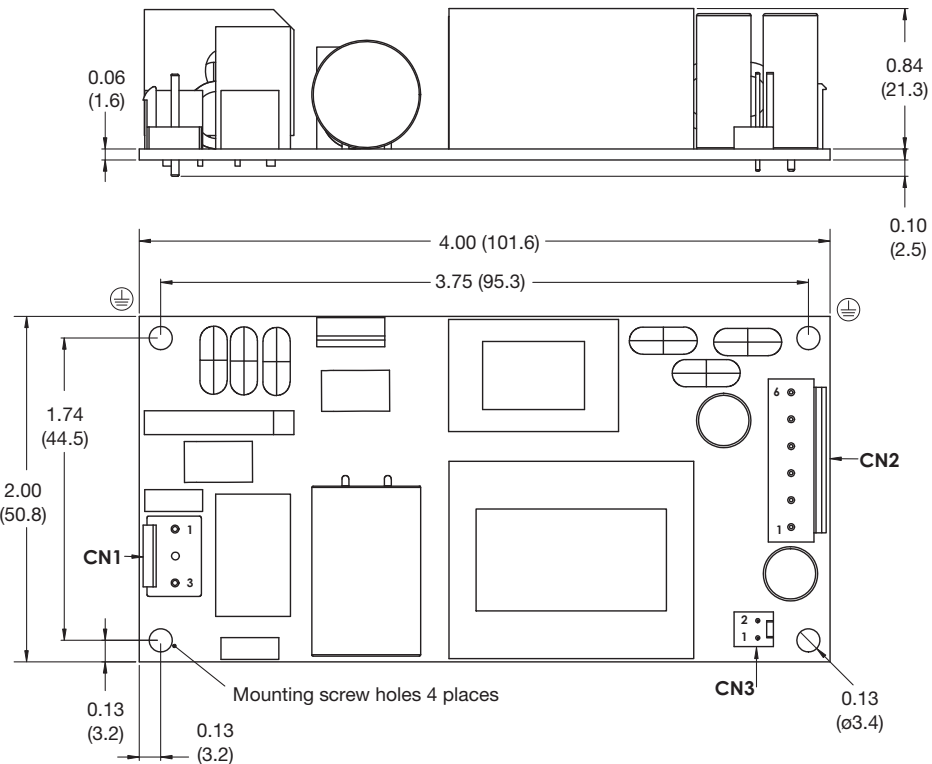

Mounting holes marked with \oplus must be connected to safety earth for class I applications and connected together for class II applications for optimum EMC performance

Notes

- All dimensions shown in inches (mm).
Tolerance: ± 0.02 (0.5)
- Weight: 0.51 lbs (230 g) approx.

Derating Curve

