

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Polyester Film Capacitor

Type: **ECQB(F)**

Designed for high density insertion applications

■ Features


- Small in size
- Excellent electric characteristics in non-inductive construction
- RoHS directive compliant

■ Recommended Applications

- General purpose



■ Explanation of Part Numbers

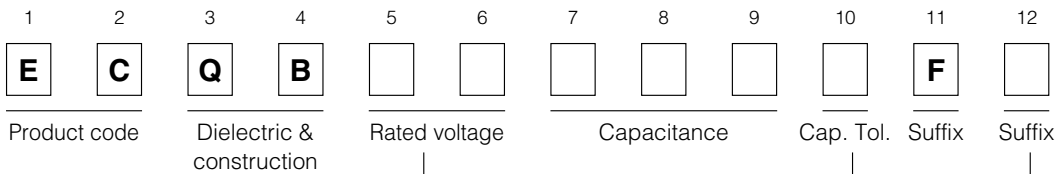


50 VDC	63 VDC	100 VDC	200 VDC
1H	1J	1	2

±5 %	±10 %
J	K

Taping				lead	
Ammo		Reel		Type1	Type2
Straight	Crimped	Straight	Crimped		style N style T
4	3	5	9	Blank	W

● Explanation of Part Number for Odd Size Taping

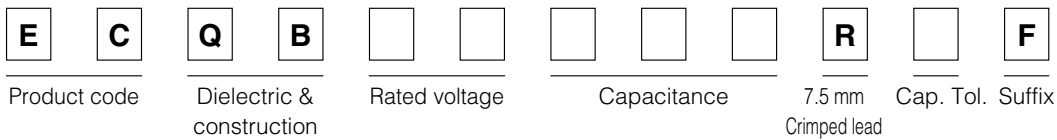


■ Specifications

Category temp. range (Including temperature-rise on unit surface)	-40 °C to +105 °C
Rated voltage	50 VDC, 63 VDC, 100 VDC, 200 VDC (Derating of rated voltage by 2.5 %/°C at more than 85 °C)
Capacitance range	0.00010 μF to 0.47 μF
Capacitance tolerance	±5 % (J), ±10 % (K) (0.00010 μF to 0.00039 μF/50 V, 63 VDC : ±10 % only)
Dissipation factor (tan δ)	tan δ ≤ 0.8 % (ECQB(F)100 VDC : tan δ ≤ 1.0 %) (20 °C, 1 kHz)
Withstand voltage	Between terminals : Rated voltage(VDC) × 250 % 1 s to 5 s
Insulation resistance (IR)	$C \leq 0.33 \mu\text{F} : IR \geq 30000 \text{ M}\Omega$ (20 °C, 50 VDC, 60 s : ECQB1H(F), ECQB1J(F)) $C > 0.33 \mu\text{F} : IR \geq 10000 \text{ M}\Omega \cdot \mu\text{F}$ (20 °C, 100 VDC, 60 s : ECQB1(F), ECQB2(F))

* In case of applying voltage in alternating current (50 Hz or 60 Hz sine wave) to a capacitor with DC rated voltage, please refer to the page of "Permissible voltage (R.M.S) in alternating current corresponding to DC rated voltage".

■ Dimensions in mm (not to scale)

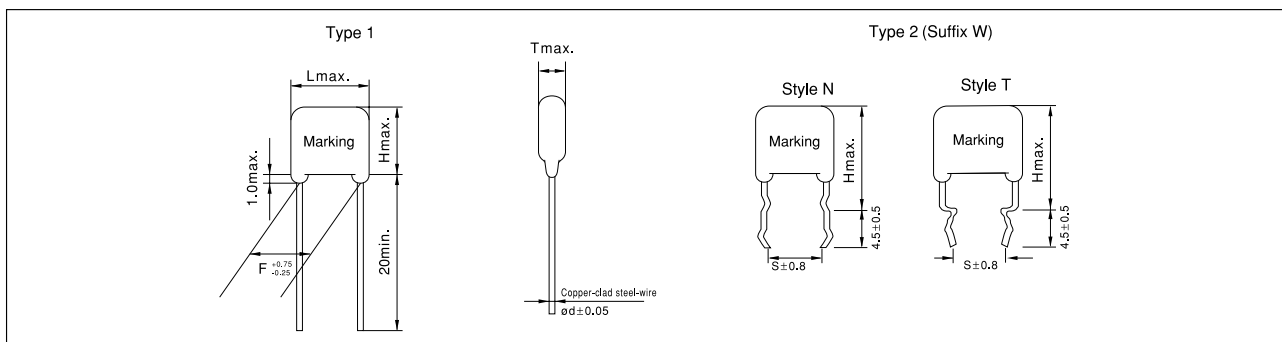


■ Packaging Specifications for Bulk Package

Packing quantity : 100 pcs./bag

■ Taping Specifications for Automatic Insertion

● Taping style

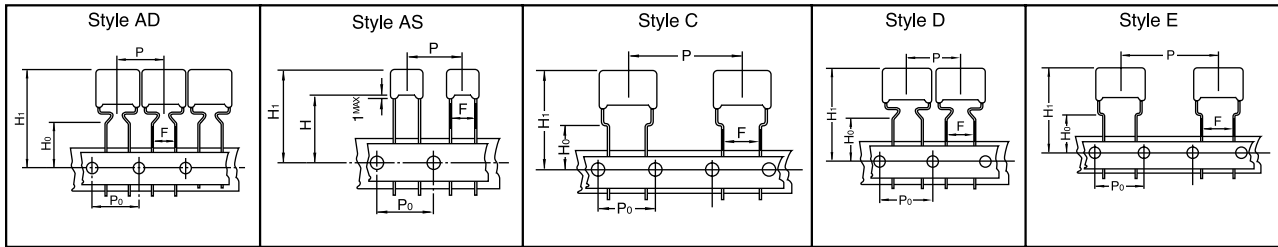

※ Refer to the page of taping specifications.

● Packaging Specifications

Type	Rated volt.	Cap.range (μF)	Taping Style					Packing	
			AD	AS	B	C	D		E
ECQB (F)	50 VDC	0.00010 to 0.22	○						Ammo
		0.00010 to 0.10		○					Ammo
		0.00010 to 0.22	○						Reel
		0.00010 to 0.10		○					Reel
	63 VDC	0.00010 to 0.033	○	○					Ammo
		0.00010 to 0.033	○	○					Reel
	100 VDC	0.00010 to 0.12	○						Ammo
		0.00010 to 0.047		○					Ammo
		0.00010 to 0.10	○						Reel
		0.00010 to 0.047		○					Reel
	200 VDC	0.15 to 0.47				○			Ammo
		0.0010 to 0.033	○						Ammo
		0.0033 to 0.056					○		Ammo
		0.068 to 0.47						○	Ammo
0.039 to 0.22					○			Ammo	
									Ammo

● Lead Spacing

Style	Lead Spacing
AD	5.0 mm
AS	5.0 mm
C	5.0 mm
D	7.5 mm
E	7.5 mm

※ See the column "Rating, Dimensions & Quantity Box" for packing quantity.

■ Rating, Dimensions & Quantity/Ammo Box & Reel

● Type ECQB(F), Rated voltage:50 VDC, Capacitance tolerance: ±5 %(J), ±10 %(K)

Only ±10 %(K) is available from 0.00010 μF to 0.00039 μF

Part No.	Cap. (μF)	Dimensions (mm)							Quantity	
		L _{max.}	T _{max.}	H _{max.}		F	S	ød	Ammo	Reel
				Type 1	Type 2					
ECQB1H101KF()	0.00010	7.0	3.0	6.0	11.0	5.00	5.0	0.50	2000	2000
ECQB1H121KF()	0.00012	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H151KF()	0.00015	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H181KF()	0.00018	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H221KF()	0.00022	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H271KF()	0.00027	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H331KF()	0.00033	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H391KF()	0.00039	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H471 □F()	0.00047	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H561 □F()	0.00056	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H681 □F()	0.00068	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H821 □F()	0.00082	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H102 □F()	0.0010	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H122 □F()	0.0012	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H152 □F()	0.0015	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H182 □F()	0.0018	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H222 □F()	0.0022	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H272 □F()	0.0027	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H332 □F()	0.0033	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H392 □F()	0.0039	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H472 □F()	0.0047	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H562 □F()	0.0056	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H682 □F()	0.0068	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H822 □F()	0.0082	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H103 □F()	0.010	7.0	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H123 □F()	0.012	7.3	3.3	6.3	11.3	5.00	5.0	0.50		
ECQB1H153 □F()	0.015	7.5	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H183 □F()	0.018	7.5	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H223 □F()	0.022	7.5	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1H273 □F()	0.027	7.5	3.5	6.5	11.5	5.00	5.0	0.50		
ECQB1H333 □F()	0.033	7.5	3.5	6.5	11.5	5.00	5.0	0.50		
ECQB1H393 □F()	0.039	7.5	4.0	7.0	12.0	5.00	5.0	0.50		
ECQB1H473 □F()	0.047	7.5	4.0	7.0	12.0	5.00	5.0	0.50		
ECQB1H563 □F()	0.056	8.0	4.3	7.5	12.5	5.00	5.0	0.50		
ECQB1H683 □F()	0.068	8.0	4.3	8.5	13.5	5.00	5.0	0.50		
ECQB1H823 □F()	0.082	8.0	4.5	8.5	13.5	5.00	5.0	0.50		
ECQB1H104 □F()	0.10	8.0	5.0	10.0	15.0	5.00	5.0	0.50		
ECQB1H124 □F()	0.12	11.0	5.0	9.5	14.5	7.50	5.0	0.60		
ECQB1H154 □F()	0.15	11.0	5.0	10.0	15.0	7.50	5.0	0.60		
ECQB1H184 □F()	0.18	11.0	5.5	10.5	15.5	7.50	5.0	0.60		
ECQB1H224 □F()	0.22	11.0	6.0	11.5	16.5	7.50	5.0	0.60		
ECQB1H274 □F()	0.27	13.0	6.0	12.0	17.0	10.00	5.0	0.60		
ECQB1H334 □F()	0.33	13.0	6.5	13.0	18.0	10.00	5.0	0.60		
ECQB1H394 □F()	0.39	13.0	7.0	14.0	19.0	10.00	5.0	0.60		
ECQB1H474 □F()	0.47	13.0	7.5	14.5	19.5	10.00	5.0	0.60		

Suffix for lead crimped or taped type
 Cap. tol. code

Style N: 0.00010 μF to 0.10 μF
 Style T: 0.12 μF to 0.47 μF

■ Rating, Dimensions & Quantity/Ammo Box & Reel

● Type ECQB(F), Rated voltage: 63 VDC, Capacitance tolerance: ±5 %(J), ±10 %(K)

Only ±10 %(K) is available from 0.00010 μF to 0.00039 μF

Part No.	Cap. (μF)	Dimensions (mm)							Quantity		
		L _{max.}	T _{max.}	H _{max.}		F		S	ød	Ammo	Reel
				Type 1	Type 2	Type 1	Type 2				
ECQB1J101KF()	0.00010	7.0	3.0	6.0	11.0	5.00	5.0	0.50	2000	2000	
ECQB1J121KF()	0.00012	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J151KF()	0.00015	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J181KF()	0.00018	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J221KF()	0.00022	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J271KF()	0.00027	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J331KF()	0.00033	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J391KF()	0.00039	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J471 □F()	0.00047	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J561 □F()	0.00056	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J681 □F()	0.00068	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J821 □F()	0.00082	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J102 □F()	0.0010	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J122 □F()	0.0012	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J152 □F()	0.0015	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J182 □F()	0.0018	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J222 □F()	0.0022	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J272 □F()	0.0027	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J332 □F()	0.0033	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J392 □F()	0.0039	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J472 □F()	0.0047	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J562 □F()	0.0056	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J682 □F()	0.0068	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J822 □F()	0.0082	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J103 □F()	0.010	7.0	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J123 □F()	0.012	7.3	3.3	6.3	11.3	5.00	5.0	0.50			
ECQB1J153 □F()	0.015	7.5	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J183 □F()	0.018	7.5	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J223 □F()	0.022	7.5	3.0	6.0	11.0	5.00	5.0	0.50			
ECQB1J273 □F()	0.027	7.5	3.5	6.5	11.5	5.00	5.0	0.50			
ECQB1J333 □F()	0.033	7.5	3.5	6.5	11.5	5.00	5.0	0.50			

□ Suffix for lead crimped or taped type
 □ Cap. tol. code

Style N: 0.00010 μF to 0.033 μF

■ Rating, Dimensions & Quantity/Ammo Box & Reel

● Type ECQB(F), Rated voltage: 100 VDC, Capacitance tolerance: ±5 % (J), ±10 % (K)

Only ±10 % (K) is available from 0.00010 μF to 0.00039 μF

Part No.	Cap. (μF)	Dimensions (mm)							Quantity	
		L _{max.}	T _{max.}	H _{max.}		F	S	ød	Ammo	Reel
				Type 1	Type 2					
ECQB1101KF()	0.00010	7.2	3.0	6.0	11.0	5.00	5.0	0.50	2000	2000
ECQB1121KF()	0.00012	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1151KF()	0.00015	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1181KF()	0.00018	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1221KF()	0.00022	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1271KF()	0.00027	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1331KF()	0.00033	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1391KF()	0.00039	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1471□F()	0.00047	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1561□F()	0.00056	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1681□F()	0.00068	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1821□F()	0.00082	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1102□F()	0.0010	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1122□F()	0.0012	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1152□F()	0.0015	7.2	3.0	6.0	11.0	5.00	5.0	0.50		
ECQB1182□F()	0.0018	7.2	3.0	6.5	11.5	5.00	5.0	0.50		
ECQB1222□F()	0.0022	7.2	3.0	6.5	11.5	5.00	5.0	0.50		
ECQB1272□F()	0.0027	7.2	3.0	6.5	11.5	5.00	5.0	0.50		
ECQB1332□F()	0.0033	7.2	3.0	6.5	11.5	5.00	5.0	0.50		
ECQB1392□F()	0.0039	7.2	3.0	6.5	11.5	5.00	5.0	0.50		
ECQB1472□F()	0.0047	7.2	3.0	6.5	11.5	5.00	5.0	0.50		
ECQB1562□F()	0.0056	7.2	3.0	6.5	11.5	5.00	5.0	0.50		
ECQB1682□F()	0.0068	7.2	3.0	6.5	11.5	5.00	5.0	0.50		
ECQB1822□F()	0.0082	7.2	3.2	7.0	12.0	5.00	5.0	0.50		
ECQB1103□F()	0.010	7.2	3.2	7.0	12.0	5.00	5.0	0.50		
ECQB1123□F()	0.012	7.2	3.5	7.0	12.0	5.00	5.0	0.50		
ECQB1153□F()	0.015	7.2	4.0	7.5	12.5	5.00	5.0	0.50		
ECQB1183□F()	0.018	7.5	4.5	8.0	13.0	5.00	5.0	0.50		
ECQB1223□F()	0.022	7.5	4.5	9.0	14.0	5.00	5.0	0.50		
ECQB1273□F()	0.027	7.5	5.0	9.5	14.5	5.00	5.0	0.50		
ECQB1333□F()	0.033	7.5	5.5	10.0	15.0	5.00	5.0	0.50		
ECQB1393□F()	0.039	7.5	6.0	11.2	16.2	5.00	5.0	0.50		
ECQB1473□F()	0.047	7.5	6.5	11.8	16.8	5.00	5.0	0.50		
ECQB1563□F()	0.056	10.0	5.0	12.0	17.0	7.50	5.0	0.60		
ECQB1683□F()	0.068	10.0	5.5	12.4	17.4	7.50	5.0	0.60		
ECQB1823□F()	0.082	10.0	5.5	14.0	19.0	7.50	5.0	0.60		
ECQB1104□F()	0.10	10.5	6.0	14.6	19.6	7.50	5.0	0.60		
ECQB1124□F()	0.12	10.5	7.0	15.2	20.2	7.50	5.0	0.60		
ECQB1154□F()	0.15	13.0	7.0	13.8	18.8	10.00	5.0	0.60		
ECQB1184□F()	0.18	13.0	7.5	14.4	19.4	10.00	5.0	0.60		
ECQB1224□F()	0.22	13.0	8.0	15.2	20.2	10.00	5.0	0.60		
ECQB1274□F()	0.27	13.0	8.5	17.2	22.2	10.00	5.0	0.60		
ECQB1334□F()	0.33	13.0	9.0	18.0	23.0	10.00	5.0	0.60		
ECQB1394□F()	0.39	13.0	10.5	19.0	24.0	10.00	5.0	0.60		
ECQB1474□F()	0.47	13.0	11.5	19.2	24.2	10.00	5.0	0.60		

↑ Suffix for lead crimped or taped type
 ↑ Cap. tol. code

Style N: 0.00010 μF to 0.047 μF
 Style T: 0.056 μF to 0.47 μF

■ Rating, Dimensions & Quantity/Ammo Box & Reel

● Type ECQB(F), Rated voltage: 200 VDC, Capacitance tolerance: ±5 % (J), ±10 % (K)

Part No.	Cap. (μ F)	Dimensions (mm)							Quantity
		L _{max.}	T _{max.}	H _{max.}		F	S	ϕ d	
				Type 1	Type 2	Type 1	Type 2		Ammo
ECQB2102□F()	0.0010	8.5	4.0	7.0	12.0	5.00	5.0	0.50	1000
ECQB2122□F()	0.0012	8.5	4.0	7.5	12.5	5.00	5.0	0.50	
ECQB2152□F()	0.0015	8.5	4.0	7.5	12.5	5.00	5.0	0.50	
ECQB2182□F()	0.0018	8.5	4.5	7.5	12.5	5.00	5.0	0.50	
ECQB2222□F()	0.0022	8.5	4.5	7.5	12.5	5.00	5.0	0.50	
ECQB2272□F()	0.0027	8.5	4.5	8.0	13.0	5.00	5.0	0.50	
ECQB2332□F()	0.0033	11.0	4.5	7.5	12.5	7.50	5.0	0.60	
ECQB2392□F()	0.0039	11.0	4.5	7.5	12.5	7.50	5.0	0.60	
ECQB2472□F()	0.0047	11.0	4.5	8.5	13.5	7.50	5.0	0.60	
ECQB2562□F()	0.0056	11.0	4.5	8.5	13.5	7.50	5.0	0.60	
ECQB2682□F()	0.0068	11.0	4.5	9.0	14.0	7.50	5.0	0.60	
ECQB2822□F()	0.0082	11.0	4.5	9.0	14.0	7.50	5.0	0.60	
ECQB2103□F()	0.010	11.0	4.5	10.0	15.0	7.50	5.0	0.60	
ECQB2123□F()	0.012	11.0	5.0	10.5	15.5	7.50	5.0	0.60	
ECQB2153□F()	0.015	11.0	5.5	10.5	15.5	7.50	5.0	0.60	
ECQB2183□F()	0.018	11.0	5.5	10.0	15.0	7.50	5.0	0.60	
ECQB2223□F()	0.022	11.0	6.0	10.5	15.5	7.50	5.0	0.60	
ECQB2273□F()	0.027	11.0	6.5	11.5	16.5	7.50	5.0	0.60	
ECQB2333□F()	0.033	11.0	7.0	12.0	17.0	7.50	5.0	0.60	
ECQB2393□F()	0.039	13.5	5.0	12.5	17.5	10.00	7.5	0.60	
ECQB2473□F()	0.047	13.5	5.5	13.0	18.0	10.00	7.5	0.60	
ECQB2563□F()	0.056	13.5	6.0	13.5	18.5	10.00	7.5	0.60	
ECQB2683□F()	0.068	16.0	5.5	13.0	18.0	12.50	10.0	0.60	
ECQB2823□F()	0.082	16.0	6.0	13.5	18.5	12.50	10.0	0.60	
ECQB2104□F()	0.10	16.0	7.0	14.5	19.5	12.50	10.0	0.60	
ECQB2124□F()	0.12	19.0	6.5	16.0	21.0	15.00	12.5	0.60	
ECQB2154□F()	0.15	19.0	7.5	17.0	22.0	15.00	12.5	0.60	
ECQB2184□F()	0.18	19.0	8.0	17.5	22.5	15.00	12.5	0.60	
ECQB2224□F()	0.22	19.0	9.0	18.5	23.5	15.00	12.5	0.60	
ECQB2274□F()	0.27	24.0	8.0	17.5	22.5	20.00	15.0	0.80	
ECQB2334□F()	0.33	24.0	9.0	18.5	23.5	20.00	15.0	0.80	
ECQB2394□F()	0.39	24.0	10.0	19.5	24.5	20.00	15.0	0.80	
ECQB2474□F()	0.47	24.0	11.5	20.5	25.5	20.00	15.0	0.80	

Suffix for lead crimped or taped type
 Cap. tol. code

Style N: 0.0010 μ F to 0.0027 μ F
 Style T: 0.0033 μ F to 0.47 μ F