



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### Polypropylene Film Capacitor

Type: **ECQP(Z)**

Non-inductive construction using Polypropylene film with epoxy resin coating

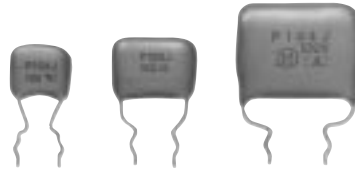



#### ■ Features

- Excellent temperature and frequency characteristics
- Excellent long term stability

#### ■ Recommended Applications



- Dolby circuits
- Oscillation circuits

#### ■ Explanation of Part Numbers

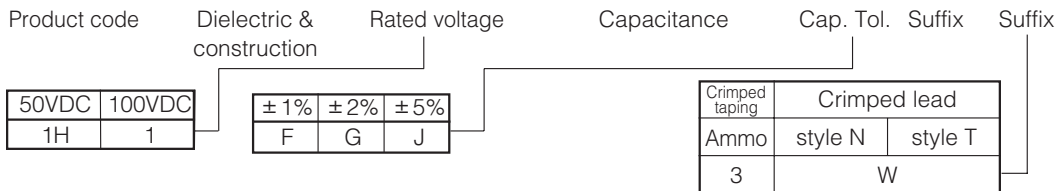

**NOTE: Straight lead not recommended**


#### ● Explanation of Part Number for Odd Size Taping



#### ■ Specifications

Category temp. range	-40 to +85°C (For a higher temperature than 70°C, derating is required. see page7)
Rated voltage	50VDC, 100VDC (Derating is required according to cap. value. see page7)
Capacitance range	0.0001 to 0.47μF
Capacitance tolerance	±1%(F), ±2%(G), ±5%(J) 50VDC : For cap. value 0.0001 to 0.0003 μF, ±5%(J) only 50VDC : For cap. value 0.00033 to 0.00091 μF, ±2%(G), ±5%(J) only 100VDC : For cap. value 0.0001 to 0.00043 μF, ±5%(J) only 100VDC : For cap. value 0.00047 to 0.00091 μF, ±2%(G), ±5%(J) only
Dissipation factor	0.1% max. (20°C 1kHz)
Withstand voltage	Between terminals: Rated volt. (VDC) × 250% 1 to 5s
Insulation resistance	C ≤ 0.33μF : 45000 MΩ min. C > 0.33μF : 15000 MΩ · μF min. ( 20°C Rated volt. 60s )

■Dimensions in mm(not to scale)

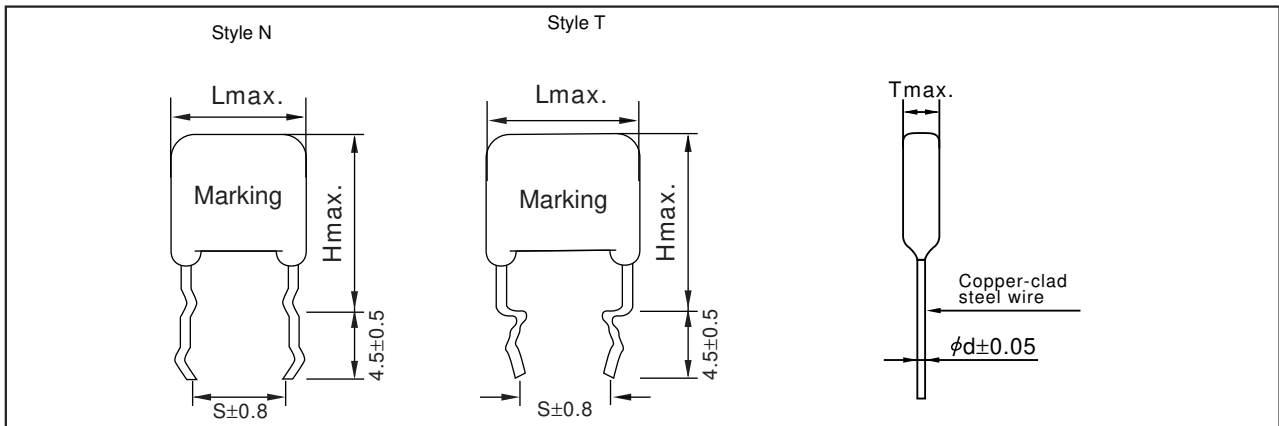


■Packaging Specifications for Bulk Package

■Packing quantity: 100pcs./bag

■Taping Specifications for Automatic Insertion

●Taping style

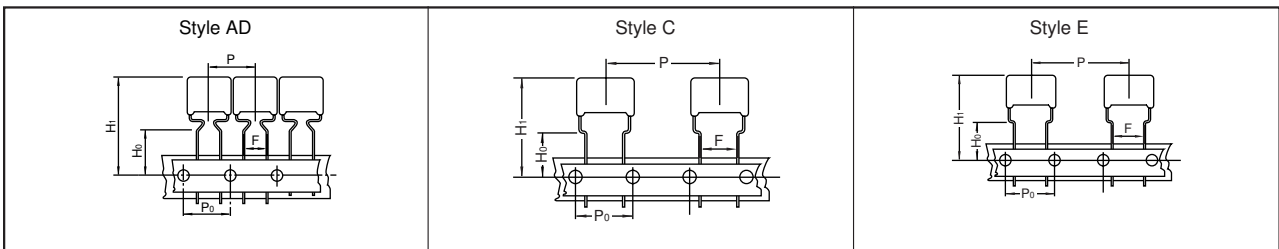

\*Cap. Tol.  $\pm 1\%$ (F) is not available for taping

\*See page 22 for Taping dimensions

●Packaging Specifications

Type	Rated volt.	Cap. range ( $\mu\text{F}$ )	Taping style						Packing
			AD	AS	B	C	D	E	
ECQP	50VDC	0.0001 to 0.033	○						Ammo
		0.036 to 0.13				○			Ammo
		0.15 to 0.33						○	Ammo
	100VDC	0.0001 to 0.018	○						Ammo
		0.02 to 0.16				○			Ammo
		0.22						○	Ammo

●Lead Spacing

Style	Lead Spacing
AD	5.0mm
C	5.0mm
E	7.5mm

\*See the column "Rating, Dimensions & Quantity Box" for packing quantity.

■ Rating, Dimensions & Quantity/Ammo Box

● Rated voltage : 50VDC, Capacitance tolerance : ±1%(F), ±2%(G), ±5%(J)

Only ±5%(J) is available from 0.0001 to 0.0003 μF, Only ±2%(G), ±5%(J) is available from 0.00033 to 0.00091 μF

Part No.	Cap. (μF)	Dimensions (mm)					Quantity
		L <sub>max.</sub>	T <sub>max.</sub>	H <sub>max.</sub>	S	ød	Ammo
ECQP1H101JZ( )	0.0001	8.5	4.5	12.5	5.0	0.50	1000
ECQP1H111JZ( )	0.00011	8.5	4.5	12.5	5.0	0.50	
ECQP1H121JZ( )	0.00012	8.5	4.5	12.5	5.0	0.50	
ECQP1H131JZ( )	0.00013	8.5	4.5	12.5	5.0	0.50	
ECQP1H151JZ( )	0.00015	8.5	4.5	12.5	5.0	0.50	
ECQP1H161JZ( )	0.00016	8.5	4.5	12.5	5.0	0.50	
ECQP1H181JZ( )	0.00018	8.5	4.5	12.5	5.0	0.50	
ECQP1H201JZ( )	0.0002	8.5	4.5	12.5	5.0	0.50	
ECQP1H221JZ( )	0.00022	8.5	4.5	12.5	5.0	0.50	
ECQP1H241JZ( )	0.00024	8.5	4.5	12.5	5.0	0.50	
ECQP1H271JZ( )	0.00027	8.5	4.5	12.5	5.0	0.50	
ECQP1H301JZ( )	0.0003	8.5	4.5	12.5	5.0	0.50	
ECQP1H331□Z( )	0.00033	8.5	4.5	12.5	5.0	0.50	
ECQP1H361□Z( )	0.00036	8.5	4.5	12.5	5.0	0.50	
ECQP1H391□Z( )	0.00039	8.5	4.5	12.5	5.0	0.50	
ECQP1H431□Z( )	0.00043	8.5	4.5	12.5	5.0	0.50	
ECQP1H471□Z( )	0.00047	8.5	4.5	12.5	5.0	0.50	
ECQP1H511□Z( )	0.00051	8.5	4.5	12.5	5.0	0.50	
ECQP1H561□Z( )	0.00056	8.5	4.5	12.5	5.0	0.50	
ECQP1H621□Z( )	0.00062	8.5	4.5	12.5	5.0	0.50	
ECQP1H681□Z( )	0.00068	8.5	4.5	12.5	5.0	0.50	
ECQP1H751□Z( )	0.00075	8.5	4.5	12.5	5.0	0.50	
ECQP1H821□Z( )	0.00082	8.5	4.5	12.5	5.0	0.50	
ECQP1H911□Z( )	0.00091	8.5	4.5	12.5	5.0	0.50	
ECQP1H102□Z( )	0.001	8.5	4.5	12.5	5.0	0.50	
ECQP1H112□Z( )	0.0011	8.5	4.5	12.5	5.0	0.50	
ECQP1H122□Z( )	0.0012	8.5	4.5	12.5	5.0	0.50	
ECQP1H132□Z( )	0.0013	8.5	4.5	12.5	5.0	0.50	
ECQP1H152□Z( )	0.0015	8.5	4.5	12.5	5.0	0.50	
ECQP1H162□Z( )	0.0016	8.5	4.5	12.5	5.0	0.50	
ECQP1H182□Z( )	0.0018	8.5	4.5	12.5	5.0	0.50	
ECQP1H202□Z( )	0.002	8.5	4.5	12.5	5.0	0.50	
ECQP1H222□Z( )	0.0022	8.5	4.5	12.5	5.0	0.50	
ECQP1H242□Z( )	0.0024	8.5	4.5	12.5	5.0	0.50	
ECQP1H272□Z( )	0.0027	8.5	4.5	12.5	5.0	0.50	
ECQP1H302□Z( )	0.003	8.5	4.5	12.5	5.0	0.50	
ECQP1H332□Z( )	0.0033	8.5	4.5	12.5	5.0	0.50	
ECQP1H362□Z( )	0.0036	8.5	4.5	12.5	5.0	0.50	
ECQP1H392□Z( )	0.0039	8.5	4.5	12.5	5.0	0.50	
ECQP1H432□Z( )	0.0043	8.5	4.5	12.5	5.0	0.50	
ECQP1H472□Z( )	0.0047	8.5	4.5	12.5	5.0	0.50	
ECQP1H512□Z( )	0.0051	8.5	4.5	13.0	5.0	0.50	
ECQP1H562□Z( )	0.0056	8.5	4.5	13.0	5.0	0.50	
ECQP1H622□Z( )	0.0062	8.5	5.0	13.0	5.0	0.50	
ECQP1H682□Z( )	0.0068	8.5	5.0	13.0	5.0	0.50	

↑ Suffix for lead crimped or taped type  
 ↑ Cap. tol. code

StyleN:0.0001 to 0.0068 μF

■ Rating, Dimensions & Quantity/Ammo Box

● Rated voltage : 50VDC, Capacitance tolerance : ±1%(F), ±2%(G), ±5%(J)

Part No.	Cap. ( $\mu$ F)	Dimensions (mm)					Quantity
		L <sub>max.</sub>	T <sub>max.</sub>	H <sub>max.</sub>	S	ød	Ammo
ECQP1H752 □Z( )	0.0075	12.0	5.0	14.0	5.0	0.60	1000
ECQP1H822 □Z( )	0.0082	12.0	5.5	14.0	5.0	0.60	
ECQP1H912 □Z( )	0.0091	12.0	5.0	13.5	5.0	0.60	
ECQP1H103 □Z( )	0.01	12.0	5.0	13.5	5.0	0.60	
ECQP1H113 □Z( )	0.011	12.0	5.0	14.0	5.0	0.60	
ECQP1H123 □Z( )	0.012	12.0	5.5	14.0	5.0	0.60	
ECQP1H133 □Z( )	0.013	12.0	5.0	14.0	5.0	0.60	
ECQP1H153 □Z( )	0.015	12.0	5.0	14.0	5.0	0.60	
ECQP1H163 □Z( )	0.016	12.0	5.5	14.0	5.0	0.60	
ECQP1H183 □Z( )	0.018	12.0	5.5	14.5	5.0	0.60	
ECQP1H203 □Z( )	0.02	12.0	5.5	14.5	5.0	0.60	
ECQP1H223 □Z( )	0.022	12.0	5.5	15.5	5.0	0.60	
ECQP1H243 □Z( )	0.024	12.0	6.0	15.5	5.0	0.60	500
ECQP1H273 □Z( )	0.027	12.0	6.0	16.0	5.0	0.60	
ECQP1H303 □Z( )	0.03	12.0	6.5	16.0	5.0	0.60	
ECQP1H333 □Z( )	0.033	12.0	6.5	16.5	5.0	0.60	
ECQP1H363 □Z( )	0.036	14.5	5.5	17.0	5.0	0.60	
ECQP1H393 □Z( )	0.039	14.5	5.5	17.0	5.0	0.60	
ECQP1H433 □Z( )	0.043	14.5	6.0	17.0	5.0	0.60	
ECQP1H473 □Z( )	0.047	14.5	6.0	17.5	5.0	0.60	
ECQP1H513 □Z( )	0.051	14.5	6.5	18.5	5.0	0.60	
ECQP1H563 □Z( )	0.056	14.5	6.5	18.5	5.0	0.60	
ECQP1H623 □Z( )	0.062	14.5	7.0	19.0	5.0	0.60	
ECQP1H683 □Z( )	0.068	14.5	7.0	19.0	5.0	0.60	
ECQP1H753 □Z( )	0.075	17.0	6.5	18.5	7.5	0.60	400
ECQP1H823 □Z( )	0.082	17.0	7.0	19.0	7.5	0.60	
ECQP1H913 □Z( )	0.091	17.0	7.0	19.0	7.5	0.60	
ECQP1H104 □Z( )	0.1	17.0	7.5	19.5	7.5	0.60	
ECQP1H114 □Z( )	0.11	17.0	8.0	20.5	7.5	0.60	
ECQP1H124 □Z( )	0.12	17.0	8.5	20.5	7.5	0.60	
ECQP1H134 □Z( )	0.13	17.0	8.5	21.0	7.5	0.60	
ECQP1H154 □Z( )	0.15	20.0	8.0	20.5	10.0	0.60	
ECQP1H164 □Z( )	0.16	20.0	8.5	20.5	10.0	0.60	
ECQP1H184 □Z( )	0.18	20.0	9.0	21.0	10.0	0.60	
ECQP1H204 □Z( )	0.20	20.0	9.5	21.5	10.0	0.60	
ECQP1H224 □Z( )	0.22	20.0	9.5	22.0	10.0	0.60	
ECQP1H244 □Z( )	0.24	20.0	10.0	22.5	10.0	0.60	300
ECQP1H274 □Z( )	0.27	20.0	10.5	23.0	10.0	0.60	
ECQP1H304 □Z( )	0.30	22.5	9.5	24.0	12.5	0.80	
ECQP1H334 □Z( )	0.33	22.5	10.0	24.5	12.5	0.80	
ECQP1H364 □Z( )	0.36	22.5	10.5	25.0	12.5	0.80	
ECQP1H394 □Z( )	0.39	22.5	11.0	25.0	12.5	0.80	
ECQP1H434 □Z( )	0.43	22.5	11.5	25.5	12.5	0.80	
ECQP1H474 □Z( )	0.47	22.5	12.0	26.0	12.5	0.80	

— Suffix for lead crimped or taped type  
 — Cap. tol. code

StyleT:0.0075 to 0.47  $\mu$ F

■ Rating, Dimensions & Quantity/Ammo Box

● Rated voltage : 100VDC, Capacitance tolerance :  $\pm 1\%$  (F),  $\pm 2\%$  (G),  $\pm 5\%$  (J)

Only  $\pm 5\%$  (J) is available from 0.0001 to 0.00043  $\mu\text{F}$ , Only  $\pm 2\%$  (G),  $\pm 5\%$  (J) is available from 0.00047 to 0.00091  $\mu\text{F}$

Part No.	Cap. ( $\mu\text{F}$ )	Dimensions (mm)					Quantity
		L <sub>max.</sub>	T <sub>max.</sub>	H <sub>max.</sub>	S	$\phi$ d	Ammo
ECQP1101JZ( )	0.0001	10.0	5.0	13.0	5.0	0.60	1000
ECQP1111JZ( )	0.00011	10.0	5.0	13.0	5.0	0.60	
ECQP1121JZ( )	0.00012	10.0	5.0	13.0	5.0	0.60	
ECQP1131JZ( )	0.00013	10.0	5.0	13.0	5.0	0.60	
ECQP1151JZ( )	0.00015	10.0	5.0	13.0	5.0	0.60	
ECQP1161JZ( )	0.00016	10.0	5.0	13.0	5.0	0.60	
ECQP1181JZ( )	0.00018	10.0	5.0	13.0	5.0	0.60	
ECQP1201JZ( )	0.0002	10.0	5.0	13.0	5.0	0.60	
ECQP1221JZ( )	0.00022	10.0	5.0	13.0	5.0	0.60	
ECQP1241JZ( )	0.00024	10.0	5.0	13.0	5.0	0.60	
ECQP1271JZ( )	0.00027	10.0	5.0	13.0	5.0	0.60	
ECQP1301JZ( )	0.0003	10.0	5.0	13.0	5.0	0.60	
ECQP1331JZ( )	0.00033	10.0	5.0	13.0	5.0	0.60	
ECQP1361JZ( )	0.00036	10.0	5.0	13.0	5.0	0.60	
ECQP1391JZ( )	0.00039	10.0	5.0	13.0	5.0	0.60	
ECQP1431JZ( )	0.00043	10.0	5.0	13.0	5.0	0.60	
ECQP1471□Z( )	0.00047	10.0	5.0	13.0	5.0	0.60	
ECQP1511□Z( )	0.00051	10.0	5.0	13.0	5.0	0.60	
ECQP1561□Z( )	0.00056	10.0	5.0	13.0	5.0	0.60	
ECQP1621□Z( )	0.00062	10.0	5.0	13.0	5.0	0.60	
ECQP1681□Z( )	0.00068	10.0	5.0	13.0	5.0	0.60	
ECQP1751□Z( )	0.00075	10.0	5.0	13.0	5.0	0.60	
ECQP1821□Z( )	0.00082	10.0	5.0	13.0	5.0	0.60	
ECQP1911□Z( )	0.00091	10.0	5.0	13.0	5.0	0.60	
ECQP1102□Z( )	0.001	10.0	5.0	13.0	5.0	0.60	
ECQP1112□Z( )	0.0011	10.0	5.0	13.0	5.0	0.60	
ECQP1122□Z( )	0.0012	10.0	5.0	13.0	5.0	0.60	
ECQP1132□Z( )	0.0013	10.0	5.0	13.0	5.0	0.60	
ECQP1152□Z( )	0.0015	10.0	5.0	13.0	5.0	0.60	
ECQP1162□Z( )	0.0016	10.0	5.0	13.0	5.0	0.60	
ECQP1182□Z( )	0.0018	10.0	5.0	13.0	5.0	0.60	
ECQP1202□Z( )	0.002	10.0	5.0	13.0	5.0	0.60	
ECQP1222□Z( )	0.0022	10.0	5.0	13.0	5.0	0.60	
ECQP1242□Z( )	0.0024	10.0	5.0	13.0	5.0	0.60	
ECQP1272□Z( )	0.0027	10.0	5.0	13.0	5.0	0.60	
ECQP1302□Z( )	0.003	10.0	5.0	13.0	5.0	0.60	
ECQP1332□Z( )	0.0033	10.0	5.0	13.0	5.0	0.60	
ECQP1362□Z( )	0.0036	10.0	5.0	13.0	5.0	0.60	
ECQP1392□Z( )	0.0039	10.0	5.0	13.0	5.0	0.60	
ECQP1432□Z( )	0.0043	10.0	5.0	13.0	5.0	0.60	
ECQP1472□Z( )	0.0047	10.0	5.0	13.0	5.0	0.60	
ECQP1512□Z( )	0.0051	10.0	5.0	13.0	5.0	0.60	
ECQP1562□Z( )	0.0056	10.0	5.0	13.0	5.0	0.60	
ECQP1622□Z( )	0.0062	10.0	5.5	13.0	5.0	0.60	
ECQP1682□Z( )	0.0068	10.0	5.5	13.0	5.0	0.60	

Suffix for lead crimped or taped type  
 Cap. tol. code

StyleN:0.0001 to 0.0068  $\mu\text{F}$

■ Rating, Dimensions & Quantity/Ammo Box

● Rated voltage : 100VDC, Capacitance tolerance : ±1%(F), ±2%(G), ±5%(J)

Part No.	Cap. ( $\mu$ F)	Dimensions (mm)					Quantity
		L <sub>max.</sub>	T <sub>max.</sub>	H <sub>max.</sub>	S	ød	Ammo
ECQP1752□Z()	0.0075	13.0	5.5	14.0	5.0	0.60	1000
ECQP1822□Z()	0.0082	13.0	5.5	14.0	5.0	0.60	
ECQP1912□Z()	0.0091	13.0	5.0	13.0	5.0	0.60	
ECQP1103□Z()	0.01	13.0	5.0	13.5	5.0	0.60	
ECQP1113□Z()	0.011	13.0	5.0	13.5	5.0	0.60	
ECQP1123□Z()	0.012	13.0	5.0	13.5	5.0	0.60	
ECQP1133□Z()	0.013	13.0	5.0	13.5	5.0	0.60	
ECQP1153□Z()	0.015	13.0	5.5	14.0	5.0	0.60	
ECQP1163□Z()	0.016	13.0	5.5	14.0	5.0	0.60	
ECQP1183□Z()	0.018	13.0	6.0	15.0	5.0	0.60	
ECQP1203□Z()	0.02	16.0	5.5	15.0	5.0	0.60	500
ECQP1223□Z()	0.022	16.0	5.5	15.0	5.0	0.60	
ECQP1243□Z()	0.024	16.0	5.5	15.0	5.0	0.60	
ECQP1273□Z()	0.027	16.0	6.0	15.0	5.0	0.60	
ECQP1303□Z()	0.03	16.0	6.0	15.5	5.0	0.60	
ECQP1333□Z()	0.033	16.0	6.5	15.5	5.0	0.60	
ECQP1363□Z()	0.036	16.0	6.5	15.5	5.0	0.60	
ECQP1393□Z()	0.039	16.0	7.0	16.0	5.0	0.60	
ECQP1433□Z()	0.043	16.0	7.5	16.0	5.0	0.60	
ECQP1473□Z()	0.047	16.0	7.5	16.5	5.0	0.60	
ECQP1513□Z()	0.051	18.0	6.5	17.0	7.5	0.60	—
ECQP1563□Z()	0.056	18.0	6.5	17.0	7.5	0.60	
ECQP1623□Z()	0.062	18.0	7.0	17.5	7.5	0.60	
ECQP1683□Z()	0.068	18.0	7.0	17.5	7.5	0.60	
ECQP1753□Z()	0.075	18.0	7.0	18.0	7.5	0.60	
ECQP1823□Z()	0.082	18.0	7.0	18.5	7.5	0.60	
ECQP1913□Z()	0.091	18.0	7.5	18.5	7.5	0.60	
ECQP1104□Z()	0.1	18.5	7.5	19.0	7.5	0.60	
ECQP1114□Z()	0.11	18.5	7.5	19.0	10.0	0.60	
ECQP1124□Z()	0.12	18.5	8.5	19.5	10.0	0.60	
ECQP1134□Z()	0.13	18.5	9.0	20.0	10.0	0.60	300
ECQP1154□Z()	0.15	18.5	9.5	20.5	10.0	0.60	
ECQP1164□Z()	0.16	18.5	9.5	20.5	12.5	0.60	
ECQP1184□Z()	0.18	19.0	10.0	21.0	12.5	0.60	
ECQP1204□Z()	0.20	19.0	10.5	21.5	12.5	0.60	
ECQP1224□Z()	0.22	19.0	11.0	22.0	12.5	0.60	
ECQP1244□Z()	0.24	25.0	9.0	21.5	12.5	0.80	
ECQP1274□Z()	0.27	25.0	9.5	22.0	12.5	0.80	
ECQP1304□Z()	0.30	25.0	10.0	22.5	12.5	0.80	
ECQP1334□Z()	0.33	25.0	10.0	23.0	12.5	0.80	
ECQP1364□Z()	0.36	25.0	10.5	23.5	12.5	0.80	—
ECQP1394□Z()	0.39	25.0	11.0	24.0	12.5	0.80	
ECQP1434□Z()	0.43	25.0	11.5	24.5	12.5	0.80	
ECQP1474□Z()	0.47	25.0	12.0	25.0	12.5	0.80	

StyleT: 0.0075 to 0.15, 0.24 to 0.47  $\mu$ F  
 StyleN: 0.16 to 0.22  $\mu$ F