



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





- ▶ Low Voltage PECL
- ▶ 7 x 5 mm Footprint
- ▶ Low Jitter
- ▶ Pb Free/RoHS Compliant

ECS-PEC25/PEC33 SMD PECL OSCILLATOR

ECS-PEC25 (2.5V) and ECS-PEC33 (3.3V) miniature SMD PECL oscillators. Ideal for low jitter applications.

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECS-PEC25 (+2.5V)			ECS-PEC33 (+3.3V)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
Frequency Range		40.0		300.0	40.0		300.0	MHz
Operating Temperature	Standard	0		+70	0		+70	°C
	Extended (N Option)	-40		+85	-40		+85	°C
Storage Temperature		-50		+125	-50		+125	°C
Supply Voltage	VDD	+2.375	+2.5	+2.625	+3.135	+3.3	+3.465	VDC
Frequency Stability *	Option A			± 100			± 100	ppm
	Option B			± 50			± 50	ppm
	Option C			± 25			± 25	ppm
Input Current	Pin 1 open or VIH			90			90	mA
Stand-by Current	Pin 1 = VIL			30			30	µA
Output Symmetry	@ 50% VDD level			40/60			45/55	%
Rise and Fall Times	20% VDD to 80% level			1			1	ns
"0" level	VOL			+1.195			+1.745	VDC
"1" level	VOH	+1.415			+2.215			VDC
Output Load	50Ω into VDD -2V							
Disable delay time				200			200	ns
Enable/Startup time				10			10	ms
RMS Jitter	12 KHz to 20 MHz band			1			1	ps
Aging				± 5			± 5	ppm

DIMENSIONS (mm)

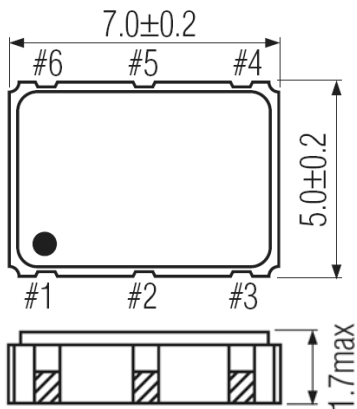


Figure 1) Top, Side and Bottom views

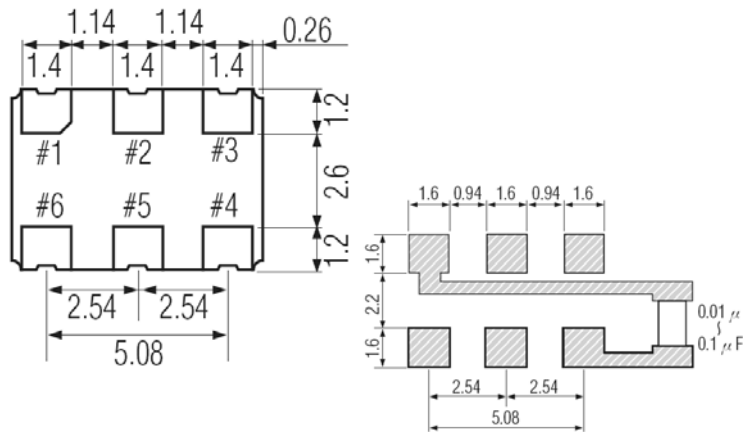


Figure 2) Suggested Land Pattern

Pin Connections	
Pin #1	Tri-State
Pin #2	N.C.
Pin #3	Ground
Pin #4	Output
Pin #5	C-Output
Pin #6	VDD

Tri-State Control Voltage	
Pad 1	Pad 4 & 5
Open	Oscillation
VIH 70% VDD Min	Oscillation
VIL 30% VDD Max	No Oscillation

Note: Internal crystal oscillation to be halted (Pin #1=VIL)

PART NUMBERING GUIDE: Example ECS-PEC33-1000-B-N

ECS - Series - Frequency Abbreviation - Stability - Temperature

PEC25 = +2.5V
PEC33 = +3.3V

1000 = 100.000 MHz
See Frequency Abbreviations (Pg 2)


A = ± 100 ppm
B = ± 50 ppm
C = ± 25 ppm

Blank = 0 ~ +70°C
M = -20 ~ +70°C
N = -40 ~ +85°C



Frequency Abbreviations


FREQUENCY MHz	CODE
100.000	1000
106.250	1062.5
125.000	1250
155.520	1555.2
156.250	1562.5

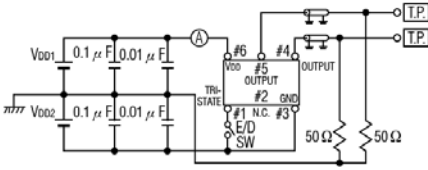

Termination : 50 Ω impedance matching

V _{DD}	V _{DD1}	V _{DD2}
+3.3V	+2.0V	-1.3V
+2.5V	+2.0V	-0.5V

Figure 1) Test Circuit (1)

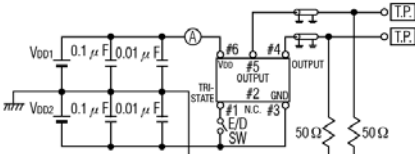

Termination : 50 Ω impedance matching

V _{DD}	V _{DD1}	V _{DD2}
+3.3V	+2.0V	-1.3V
+2.5V	+2.0V	-0.5V

Figure 2) Test Circuit (2)

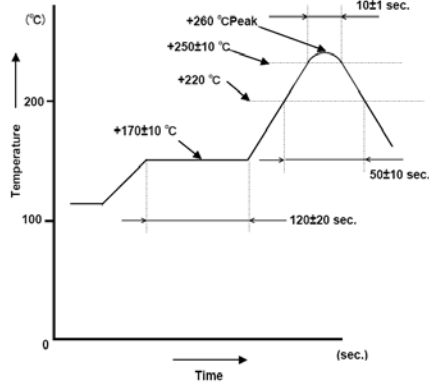


Figure 4) Suggested Reflow Profile

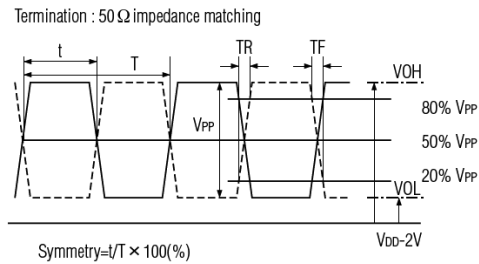


Figure 5) Output Waveform (1)


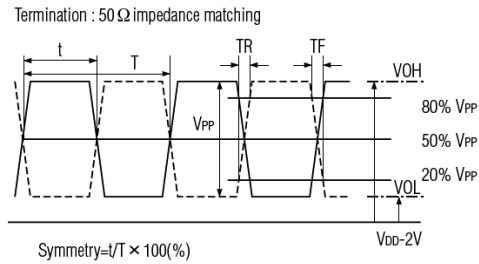


Figure 6) Output Waveform (2)

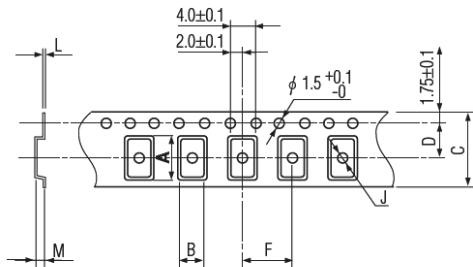

A	B	C	D	F	J	L	M	Reel Dia.	Qty/Reel
7.5	5.5	16.0	7.5	8.0	2.0	0.3	2.2	245	1000pcs

Figure 3) Pocket Tape Dimensions

Package Data	
Item	Description
Lid	Metal
Base	Ceramic
Sealing	Seam
Terminal	Tungsten (metalized)
Plating	Gold/Nickel (Surface)/(Under)
RoHS	Compliant (Pb Free)