



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Metalized Polypropylene Film Capacitor

Type : **ECWF(L)**

Non-inductive construction using metallized polypropylene film with flame retardant epoxy resin coating.

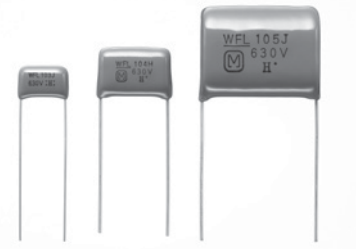


### Features

- Small size
- Excellent frequency characteristics
- Low loss
- 85 °C, 85 % RH, W.V. × 1.0 for 500 hours
- RoHS directive compliant


### Recommended applications

- Lighting
- High frequency and high current circuits (Televisions, Monitors, Power Supplies, etc.)

### Explanation of part number

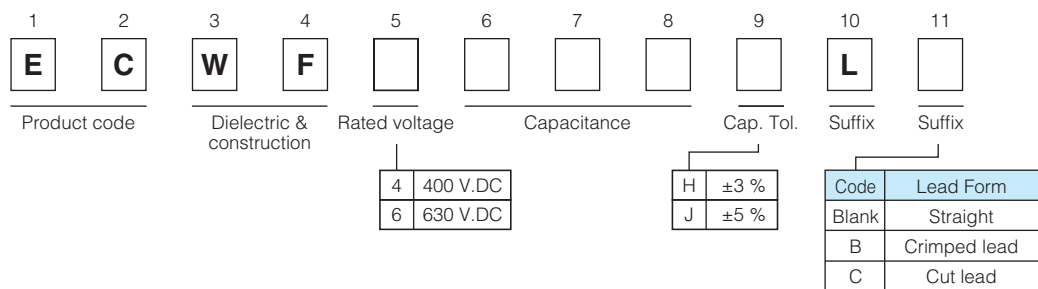

- Odd size taping

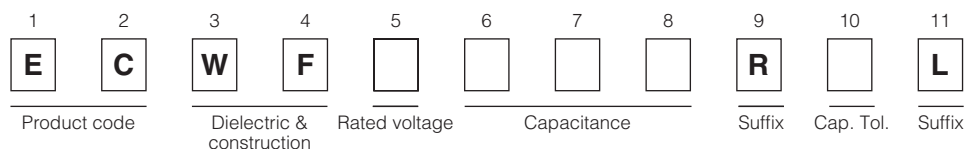


### Specifications

Category temp. range (Including temperature-rise on unit surface)	- 40 °C to +105 °C	
Rated voltage	400 V.DC, 630 V.DC	
Capacitance range	400 V.DC	0.022 μF to 2.4 μF
	630 V.DC	0.010 μF to 1.3 μF
Capacitance tolerance	±3 % (H), ±5 % (J)	
Dissipation factor (tan δ)	tan δ ≤ 0.05 % ( 20 °C, 1 kHz ) tan δ ≤ 0.20 % ( 20 °C, 10 kHz )	
Withstand voltage	Between terminals : Rated volt. (V.DC) × 150 %, 60 s	
Insulation resistance (IR)	C ≤ 0.33 μF : IR ≥ 9000 MΩ (20 °C, 100 V.DC, 60 s for 400 V.DC)	
	C > 0.33 μF : IR ≥ 3000 MΩ · μF (20 °C, 500 V.DC, 60 s for 630 V.DC)	

\* In case of applying voltage in alternating current (50 Hz or 60 Hz sine wave) to a capacitor with DC rated voltage, please refer to the page of "Permissible voltage (R.M.S) in alternating current corresponding to DC rated voltage".

## Dimensions

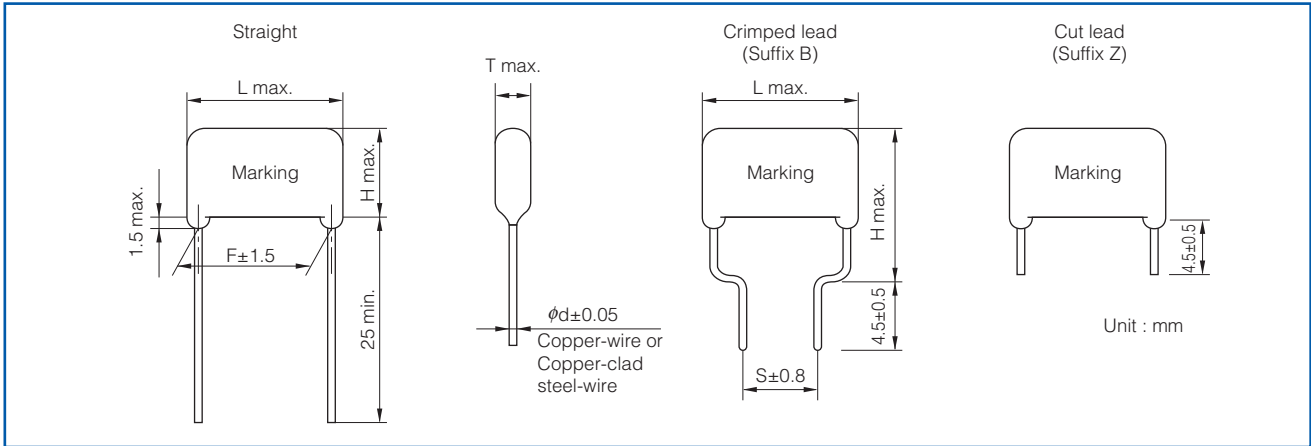


## Packaging specifications for bulk package

- Packing quantity : 100 pcs./bag

## Taping specifications for automatic insertion

- Taping style

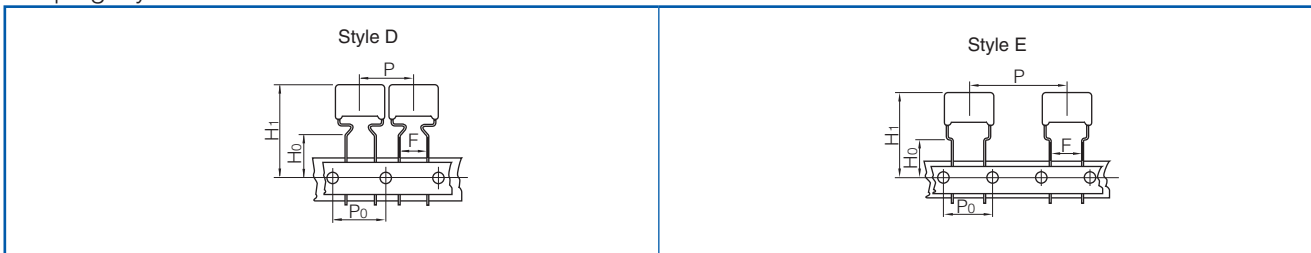

\* Refer to the page of taping specifications.

- Packaging specifications

Type	Rated voltage (V.DC)	Capacitance range (μF)	Taping style					Packing	suffix
			AD	AB	C	D	E		
ECWF(L)	400	0.022 to 0.091				○		Ammo	R( ) L
		0.10 to 1.0				○		Ammo	R( ) L
	630	0.010 to 0.043				○		Ammo	R( ) L
		0.047 to 0.43				○		Ammo	R( ) L

- Lead spacing

Style	Lead spacing
D	7.5 mm
E	7.5 mm

## Rating · Dimensions · Quantity

● Rated voltage : 400 V.DC, Capacitance tolerance : ± 3 % (J), ± 5 % (K)

Part No.	Cap. ( $\mu$ F)	Dimensions (mm)							Min. order Q'ty	
		L max.	T max.	H max.		F	S	$\phi$ d	Taping	Bulk
				Straight	Crimped lead				7.5 mm	
ECWF4223□L( )	0.022	12.5	5.8	8.6	13.6	10.0	7.5	0.6	1100	500
ECWF4243□L( )	0.024	12.5	6.0	8.8	13.8	10.0	7.5	0.6		
ECWF4273□L( )	0.027	12.5	6.2	9.0	14.0	10.0	7.5	0.6	1000	
ECWF4303□L( )	0.030	12.5	6.4	9.3	14.3	10.0	7.5	0.6		
ECWF4333□L( )	0.033	12.5	6.7	9.5	14.5	10.0	7.5	0.6	900	
ECWF4363□L( )	0.036	12.5	5.7	8.4	13.4	10.0	7.5	0.6		
ECWF4393□L( )	0.039	12.5	5.8	8.6	13.6	10.0	7.5	0.6	1100	
ECWF4433□L( )	0.043	12.5	6.0	8.8	13.8	10.0	7.5	0.6		
ECWF4473□L( )	0.047	12.5	6.2	9.0	14.0	10.0	7.5	0.6	1000	
ECWF4513□L( )	0.051	12.5	6.4	9.2	14.2	10.0	7.5	0.6		
ECWF4563□L( )	0.056	12.5	6.6	9.4	14.4	10.0	7.5	0.6	900	
ECWF4623□L( )	0.062	13.0	6.8	9.6	14.6	10.0	7.5	0.8		
ECWF4683□L( )	0.068	13.0	7.0	9.9	14.9	10.0	7.5	0.8	800	
ECWF4753□L( )	0.075	13.0	7.3	10.1	15.1	10.0	7.5	0.8		
ECWF4823□L( )	0.082	13.0	7.5	10.4	15.4	10.0	7.5	0.8	500	
ECWF4913□L( )	0.091	13.0	7.8	10.7	15.7	10.0	7.5	0.8		
ECWF4104□L( )	0.10	15.5	6.5	11.0	16.0	12.5	7.5	0.8	400	
ECWF4114□L( )	0.11	15.5	6.8	11.3	16.3	12.5	7.5	0.8		
ECWF4124□L( )	0.12	15.5	7.0	11.5	16.5	12.5	7.5	0.8	300	
ECWF4134□L( )	0.13	15.5	7.2	11.8	16.8	12.5	7.5	0.8		
ECWF4154□L( )	0.15	15.5	7.6	12.2	17.2	12.5	7.5	0.8	200	
ECWF4164□L( )	0.16	15.5	7.8	12.4	17.4	12.5	7.5	0.8		
ECWF4184□L( )	0.18	15.5	8.2	12.8	17.8	12.5	7.5	0.8	300	
ECWF4204□L( )	0.20	15.5	8.6	13.3	18.3	12.5	7.5	0.8		
ECWF4224□L( )	0.22	15.5	9.0	13.6	18.6	12.5	7.5	0.8	200	
ECWF4244□L( )	0.24	18.0	8.3	13.0	18.0	15.0	10.0	0.8		
ECWF4274□L( )	0.27	18.0	8.8	13.4	18.4	15.0	10.0	0.8	300	
ECWF4304□L( )	0.30	18.0	9.2	13.9	18.9	15.0	10.0	0.8		
ECWF4334□L( )	0.33	18.0	9.6	14.3	19.3	15.0	10.0	0.8	200	
ECWF4364□L( )	0.36	18.0	9.9	14.7	19.7	15.0	10.0	0.8		
ECWF4394□L( )	0.39	18.0	10.3	15.1	20.1	15.0	10.0	0.8	300	
ECWF4434□L( )	0.43	18.0	10.7	15.6	20.6	15.0	10.0	0.8		
ECWF4474□L( )	0.47	18.0	11.2	16.1	21.1	15.0	10.0	0.8	200	
ECWF4514□L( )	0.51	20.5	10.3	16.8	21.8	17.5	12.5	0.8		
ECWF4564□L( )	0.56	20.5	10.7	17.3	22.3	17.5	12.5	0.8	300	
ECWF4624□L( )	0.62	20.5	11.3	17.9	22.9	17.5	12.5	0.8		
ECWF4684□L( )	0.68	20.5	11.8	18.5	23.5	17.5	12.5	0.8	200	
ECWF4754□L( )	0.75	20.5	12.3	19.1	24.1	17.5	12.5	0.8		
ECWF4824□L( )	0.82	23.0	11.8	18.5	23.5	20.0	12.5	0.8	300	
ECWF4914□L( )	0.91	23.0	12.4	19.2	24.2	20.0	12.5	0.8		
ECWF4105□L( )	1.0	23.0	13.0	19.8	24.8	20.0	12.5	0.8	200	
ECWF4115□L( )	1.1	23.0	13.6	20.5	25.5	20.0	12.5	0.8		
ECWF4125□L( )	1.2	28.0	12.3	19.1	24.1	25.0	17.5	0.8	-	
ECWF4135□L( )	1.3	28.0	12.8	19.6	24.6	25.0	17.5	0.8		
ECWF4155□L( )	1.5	28.0	13.7	20.7	25.7	25.0	17.5	0.8	-	
ECWF4165□L( )	1.6	28.0	14.2	21.2	26.2	25.0	17.5	0.8		
ECWF4185□L( )	1.8	28.0	15.2	22.2	27.2	25.0	17.5	0.8	-	
ECWF4205□L( )	2.0	28.0	16.0	23.1	28.1	25.0	17.5	0.8		
ECWF4225□L( )	2.2	28.0	16.8	24.0	29.0	25.0	17.5	0.8	-	
ECWF4245□L( )	2.4	28.0	17.5	24.8	29.8	25.0	17.5	0.8		

\* □ : Capacitance tolerance code  
( ) : Suffix for lead crimped

## Rating · Dimensions · Quantity

● Rated voltage : 630 V.DC, Capacitance tolerance :  $\pm 3 \%$ (J),  $\pm 5 \%$ (J)

Part No.	Cap. ( $\mu$ F)	Dimensions (mm)							Min. order Q'ty	
		L max.	T max.	H max.		F	S	$\phi$ d	Taping	Bulk
				Straight	Crimped lead				7.5 mm	
ECWF6103□L( )	0.010	12.5	5.2	8.0	13.0	10.0	7.5	0.6	1200	500
ECWF6113□L( )	0.011	12.5	5.4	8.2	13.2	10.0	7.5	0.6		
ECWF6123□L( )	0.012	12.5	5.5	8.3	13.3	10.0	7.5	0.6		
ECWF6133□L( )	0.013	12.5	5.6	8.5	13.5	10.0	7.5	0.6	1100	
ECWF6153□L( )	0.015	12.5	5.9	8.7	13.7	10.0	7.5	0.6		
ECWF6163□L( )	0.016	12.5	6.0	8.9	13.9	10.0	7.5	0.6		
ECWF6183□L( )	0.018	12.5	6.2	9.1	14.1	10.0	7.5	0.6	1000	
ECWF6203□L( )	0.020	12.5	6.5	9.3	14.3	10.0	7.5	0.6		
ECWF6223□L( )	0.022	12.5	6.2	9.0	14.0	10.0	7.5	0.6		
ECWF6243□L( )	0.024	12.5	6.4	9.2	14.2	10.0	7.5	0.6	900	
ECWF6273□L( )	0.027	13.0	6.6	9.5	14.5	10.0	7.5	0.8		
ECWF6303□L( )	0.030	13.0	6.9	9.7	14.7	10.0	7.5	0.8		
ECWF6333□L( )	0.033	13.0	7.1	10.0	15.0	10.0	7.5	0.8	800	
ECWF6363□L( )	0.036	13.0	7.3	10.2	15.2	10.0	7.5	0.8		
ECWF6393□L( )	0.039	13.0	7.6	10.4	15.4	10.0	7.5	0.8		
ECWF6433□L( )	0.043	13.0	7.9	10.7	15.7	10.0	7.5	0.8	500	
ECWF6473□L( )	0.047	15.5	6.4	10.8	15.8	12.5	7.5	0.8		
ECWF6513□L( )	0.051	15.5	6.6	11.0	16.0	12.5	7.5	0.8		
ECWF6563□L( )	0.056	15.5	6.8	11.2	16.2	12.5	7.5	0.8	400	
ECWF6623□L( )	0.062	15.5	7.1	11.5	16.5	12.5	7.5	0.8		
ECWF6683□L( )	0.068	15.5	7.4	11.8	16.8	12.5	7.5	0.8		
ECWF6753□L( )	0.075	15.5	7.7	12.1	17.1	12.5	7.5	0.8		
ECWF6823□L( )	0.082	15.5	8.0	12.4	17.4	12.5	7.5	0.8		
ECWF6913□L( )	0.091	15.5	8.3	12.7	17.7	12.5	7.5	0.8		
ECWF6104□L( )	0.10	18.0	7.7	12.1	17.1	15.0	10.0	0.8	300	
ECWF6114□L( )	0.11	18.0	8.0	12.4	17.4	15.0	10.0	0.8		
ECWF6124□L( )	0.12	18.0	8.3	12.7	17.7	15.0	10.0	0.8		
ECWF6134□L( )	0.13	18.0	8.5	13.0	18.0	15.0	10.0	0.8		
ECWF6154□L( )	0.15	18.0	9.1	13.5	18.5	15.0	10.0	0.8		
ECWF6164□L( )	0.16	18.0	9.3	13.8	18.8	15.0	10.0	0.8		
ECWF6184□L( )	0.18	18.0	9.8	14.2	19.1	15.0	10.0	0.8	200	
ECWF6204□L( )	0.20	18.0	10.3	14.7	19.7	15.0	10.0	0.8		
ECWF6224□L( )	0.22	18.0	10.8	15.5	20.5	15.0	10.0	0.8		
ECWF6244□L( )	0.24	18.0	11.2	15.9	20.9	15.0	10.0	0.8	300	
ECWF6274□L( )	0.27	20.5	10.4	16.7	21.7	17.5	12.5	0.8		
ECWF6304□L( )	0.30	20.5	10.9	17.2	22.2	17.5	12.5	0.8		
ECWF6334□L( )	0.33	20.5	11.4	17.7	22.7	17.5	12.5	0.8	200	
ECWF6364□L( )	0.36	20.5	11.9	18.5	23.5	17.5	12.5	0.8		
ECWF6394□L( )	0.39	20.5	12.4	19.0	24.0	17.5	12.5	0.8		
ECWF6434□L( )	0.43	20.5	13.0	19.5	24.5	17.5	12.5	0.8	-	
ECWF6474□L( )	0.47	20.5	13.5	20.1	25.1	17.5	12.5	0.8		
ECWF6514□L( )	0.51	28.0	11.1	17.3	22.3	25.0	17.5	0.8		
ECWF6564□L( )	0.56	28.0	11.6	17.8	22.8	25.0	17.5	0.8		
ECWF6624□L( )	0.62	28.0	12.1	18.7	23.7	25.0	17.5	0.8		
ECWF6684□L( )	0.68	28.0	12.7	19.3	24.3	25.0	17.5	0.8		
ECWF6754□L( )	0.75	28.0	13.3	19.9	24.9	25.0	17.5	0.8		
ECWF6824□L( )	0.82	28.0	13.9	20.5	25.5	25.0	17.5	0.8		
ECWF6914□L( )	0.91	28.0	14.6	21.2	26.2	25.0	17.5	0.8		
ECWF6105□L( )	1.0	28.0	15.5	22.3	27.3	25.0	17.5	0.8		
ECWF6115□L( )	1.1	28.0	16.3	23.0	28.0	25.0	17.5	0.8		
ECWF6125□L( )	1.2	28.0	17.0	23.7	28.7	25.0	17.5	0.8		
ECWF6135□L( )	1.3	28.0	17.6	24.4	29.4	25.0	17.5	0.8		

\* □ : Capacitance tolerance code  
( ) : Suffix for lead crimped