



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR (TRANSLUCENT)	MAX WIRE INSULATION DIA.	DIMENSIONS in. [mm]			CRIMP TOOLS
					L± .03 [0,8]	W± .01 [0,3]	H± .01 [0,3]	
EDNF18250F1MB	#22-18 [0,5-1,0]	.250 X .032 [6,3 X 0,8]	RED	.136 [3,45]	.91 [23,1]	.45 [11,4]	.34 [8,6]	CT-520 CT-600-A CT-1525 CT-2500
EDNF14250F1MB	#16-14 [1,5-2,5]	.250 X .032 [6,3 X 0,8]	BLUE	.160 [4,06]	.91 [23,1]	.45 [11,4]	.34 [8,6]	CT-600-A CT-1550 CT-1551 CT-2500
EDNF10250F1MB	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	YELLOW	.220 [5,59]	.96 [24,4]	.45 [11,4]	.36 [9,1]	CT-600-A CT-1550 CT-1551 CT-2500

NOTES:


- UL LISTED AND CSA CERTIFIED FOR:
 - A. STRANDED COPPER WIRE ONLY
 - B. 221°F (105°C) MAX TEMP RATING (CSA)
 - C. 257°F (125°C) MAX TEMP RATING (UL)
 - D. 600V MAX VOLTAGE

- MATERIAL:
 - A. STAMPING: .016" (0.41) THK BRASS, NICKEL PLATED
EDNF10250F1MB: .032" (0,81) THK COPPER, NICKEL PLATED
 - B. HOUSING: 6/6 NYLON

- WIRE STRIP LENGTH: 9/32" ^{+1/32}₋₀ [7,1mm ^{+0,8}₋₀]
 FOR EDNF10250F1MB: 3/8" ^{+1/32}₋₀ [9,5mm ^{+0,8}₋₀]

4. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

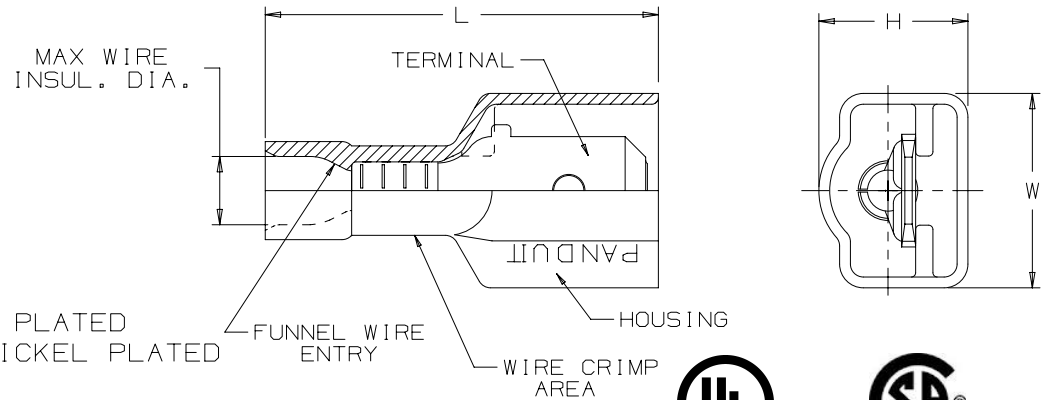

LISTED
20H3
E78522



CERTIFIED
LR31212

TITLE STRONGHOLD MALE DISCONNECT (250 SERIES) NYLON FULLY INSULATED #22-10 AWG		CUSTOMER DRAWING	
ITEM REVISION NAME 00123SHY/00		PANDUIT	
DATASET FILE NAME 00123SHY/00			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		MATERIAL: SEE NOTES	
DRAWING NUMBER: SH41402		DRAWING NUMBER: SHT 1 OF 1	
DRAWN BY JHNU	DATE 2/18	CHK TMR	SCALE NTS
REV	DATE	BY	CHK

00	2/18	JHNU	TMR	RGB	RELEASED	00123SH
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

D10100DA/20