

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Pan-Way® LD Surface Raceway System



LD Raceway

Raceway: LD3IW**-A LD5IW**-A LD10IW**-A

LD Raceway Fittings

Coupler: CF*IW-E Inside corner: ICFC*IW-X Outside corner: OCFC*IW-X Right angle: RAFC*IW-X ECF*IW-X End cap: TFC*IW-X Tee: Four-way cross: CRFC5IW-X

Drop ceiling/

entrance end: DCF*IW-X Right angle/

RAFFXIW-X

RF5X3IW-E

RF10X5IW-X

RF10X3IW-X

entrance end: LD5 to LD3

reducer: LD10 to LD5 reducer:

LD10 to LD3 reducer: LD5 fire box adapter:

FBA5IW-X LD10 fire box adapter: FBA10IW-X

LD Raceway Installation

Installation tool: LDW*-V

LD Raceway Surface Mount **Outlet/Junction Boxes**

Low Voltage: Single gang,

one-piece : JB1IW-A

Single gang,

one-piece, deep: JB1DIW-A

Single gang,

two-piece: JBX3510IW-A

Single gang, two-piece,

JB1FSIW-A fast snap: In-wall box adapter: JBA-X

Power rated: Single gang,

JBP1IW two-piece:

Single gang,

two-piece, deep: JBP1DIW

Single gang,

two-piece, extension: JBP1EIW

Single gang, two-piece, JBP1IIW intermediate:

Single gang, two-piece,

JBP1FSIW snap on:

Single gang,

two-piece, round: RJBX3510IW

Double gang, two-piece: Double gang,

JBP2IW

two-piece, deep: Double gang,

JBP2DIW


two-piece, divided: Double gang.

JBP2SIW JBP2FSIW

two-piece, snap on:

specifications

LD non-metallic series low voltage, one-piece hinged design, single channel surface raceway shall include adhesive backing and shall be made of impact resistant material with a smooth finish that shall not scratch, peel or corrode. The raceway shall include an assortment of bend radius and standard fittings that complement the offering to help route, protect and conceal low voltage data, voice and video cabling. LD raceway shall be available in three sizes and four standard colors that shall be optimized with the Panduit® Pan-Net® communication system.



technical information

Material:	Rigid PVC						
Flammability:	UL94V-0; FT4						
Capacity:	Single Channel						
Voltage Rating:	50V or less						
Operating and Storage Temperature:	0 to 50° C						

key features and henefits

Key leatures a	
1" bend radius control fittings:	Cables in the raceway will satisfy the minimum 1" bend radius requirement, preventing the potential degradation of cable performance; meets TIA/EIA standards
One-piece hinged design:	Cables can be laid into the raceway, speeding installation and preventing damage to cables
Adhesive backing:	Full length adhesive strip allows easy tool free installation and works well for temporary mounting
Available in different sizes & lengths:	Accommodates varying cable types and capacities. Available sizes - LD3, LD5,LD10; Available lengths - 6',8',10' (2m length available in Europe only)
Non-metallic construction:	Lightweight, reducing installer fatigue and labor required to install the raceway; solid color throughout will not chip, peel, rust or corrode; easy to cut with standard saws and saw blades, eliminating the need for special cutting devices
Distinct colors:	Available in four standard colors- IW,EI,IG,WH. AW available in Europe only. Raceway is field paintable to match walls and surrounding décor
Full selection of fittings and surface mount boxes:	Wide variety of fittings and surface mount boxes available for various LD raceway applications

applications

Pan-Way® LD Surface Raceways are designed to provide easy and economical solutions for routing any low voltage cable along smooth and clean perimeter walls,

baseboards or ceilings. This raceway is a perfect solution for schools, hospitals, offices, homes or anywhere a small, secure, low profile raceway is needed.

^{*} Insert raceway size of 3, 5, or 10


^{**} Insert raceway length of 6', 8', or 10' All parts listed in International White (IW) color. To order other colors substitute Electrical Ivory (EI), International Gray (IG), and White (WH).


Pan-Way® LD Surface Raceway System


Wire Fill

Raceway Type and Configuration	Fill Area (in²)	Electrical Cables												Audio/Video		Flber Optic Cable	
		14 AWG	12 AWG	10 AWG	Data Grade Cables 24 AWG/UTP CM												
		THHN/T90		Cat 5e – Plenum		Cat. 6		Cat. 6A		Cat. 6A (SD)		RG6		2 Strand			
		0.111	0.130	0.164	DIA. = 0.193		DIA. = 0.24		DIA. = 0.30		DIA. = 0.24		DIA. = 0.275		DIA. = 0.175		
		FILL		FILL		FILL		FILL		FILL		FILL		FILL			
		MAX	MAX	MAX	SPEC	MAX	SPEC	MAX	SPEC	MAX	SPEC	MAX	SPEC	MAX	SPEC	MAX	
		(UL Temp Rise Test)		40%	60%	40%	60%	40%	60%	40%	60%	40%	60%	40%	60%		
LD3	0.21	**	**	**	2	4	1	2	1	1	1	2	1	2	3	5	
LD5	0.38	**	**	**	5	7	3	5	2	3	3	5	2	3	6	9	
LD10	1.00	**	**	**	13	20	8	13	5	8	8	13	6	10	16	24	

LD Raceway







Fittings




CF



ICFC



OCFC



RAFC



ECF



TFC



CRFC5



DCF



RAEFX



RF



FBA



LDW

www.panduit.com


Pan-Way® LD Surface Raceway System

Compatible LD Raceway Surface Mount Outlet/Junction Boxes

Low Voltage or Fiber Optic ONLY						
JB1**-A	Single gang one-piece outlet box with adhesive backing.					
JB1D**-A	Single gang one-piece deep outlet box with adhesive backing					
JB1FS**-A	Fast-Snap™ Single Gang Two-Piece Snap Together Outlet Box with adhesive backing.					
JBX3510**-A	Single gang two-piece snap together outlet box with adhesive backing					
JBA-X	In-wall box adapters adapt single gang surface mount outlet boxes to in-wall conduit boxes.					
Power, Low Voltage or Fiber Optic						
RJBX3510**	Single gang two-piece screw together round outlet box.					
JBP1**	Single gang two-piece screw together outlet box.					
JBP1D**	Single gang two-piece screw together deep outlet box.					
JBP1E**	Single gang two-piece screw together extvension outlet box.					
JBP1I**	Single gang two-piece screw together intermediate outlet box.					
JBP2**	Double gang two-piece screw together deep outlet box					
JBP2S**	Double gang two-piece screw together divided outlet box					
JBP2D**	Double gang two-piece screw together deep outlet box					
JBP2FS**	Fast-Snap™ Double Gang Power Rated Two-Piece Snap Together Outlet Box					
PSJBX**	Single gang two-piece snap together power source box.					

^{** =} Available colors: International White (IW), Electrical Ivory (EI), International Gray (IG), White (WH) or Arctic White (AW).


Surface Mount Outlet/Junction Boxes

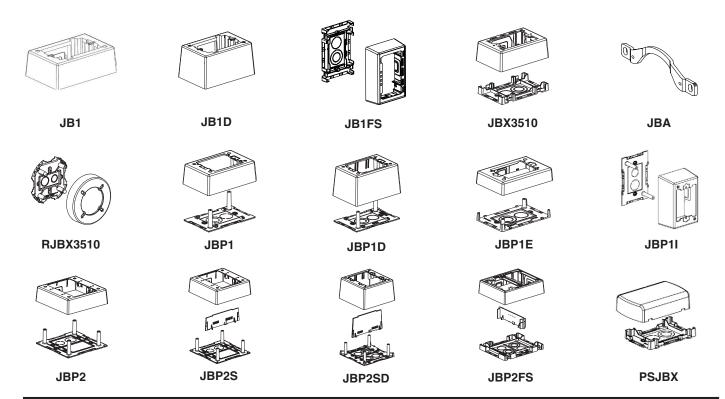

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty





Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300

© 2015 Panduit Corp.
ALL RIGHTS RESERVED.
SRSP21--WW-ENG
Replaces WW-SRSP10
6/2015

