



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




EE-SX1031

Dual Channel Phototransistor Output Ideal for Encoder Applications

- High resolution (0.5 mm) sensing
- Separate LED/Phototransistor combinations within a single housing
- PCB-mountable



Ordering Information

Appearance	Sensing method	Slot width	Slot depth	Sensing object	Output configuration	Part number
	Transmissive	3.4 mm	7.2 mm	Opaque, 0.5 x 2.1 mm min.	Phototransistor	EE-SX1031

Specifications

■ ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ (77°F))


Item		Symbol	Rated value
Input	Forward current	I_F	50 mA*
	Reverse voltage	V_R	4 V
Output	Collector-emitter voltage	V_{CEO}	30 V
	Collector current	I_C	20 mA
	Collector dissipation	P_C	100 mW
Ambient temperature	Operating	T_{opr}	-25°C to 85°C (-13°F to 185°F)
	Storage	T_{stg}	-30°C to 100°C (-22°F to 212°F)

*Refer to Engineering Data if the ambient temperature is not within the normal room temperature range.

CHARACTERISTICS (T_A = 25°C (77°F))

Item	Symbol	Value	Condition
Emitter	Forward voltage	V _F	1.2 V typ.; 1.5 V max.
	Reverse current	I _R	0.01 μA typ.; 10 μA max.
	Peak emission wavelength	λ _{p(L)}	940 nm typ.
Detector	Dark current	I _D	2 nA typ.; 200 nA max.
	Peak spectral sensitivity wavelength	λ _{p(P)}	850 nm typ.
Combination	Light current (collector current)	I _L	0.5 to 14 mA
	Collector-emitter saturated voltage	V _{CE (sat)}	0.15 V typ.; 0.4 V max.
	Rising time*	t _r	4 μs typ.
	Falling time*	t _f	4 μs typ.


*The following illustrations show the rising time, t_r, and the falling time, t_f.

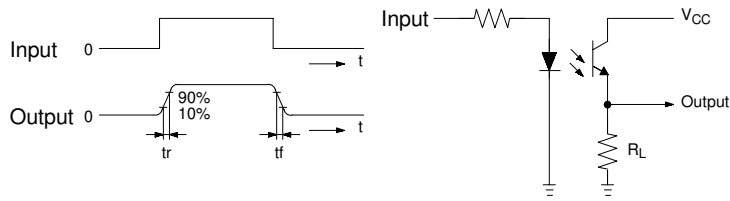


Engineering Data

Note: The operating conditions of the photomicrosensor must be within the absolute maximum rating ranges.


TEMPERATURE CHARACTERISTICS

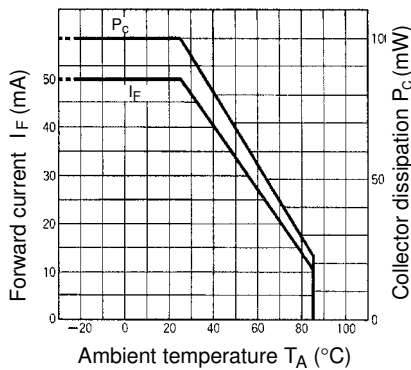


INPUT CHARACTERISTICS (TYPICAL)

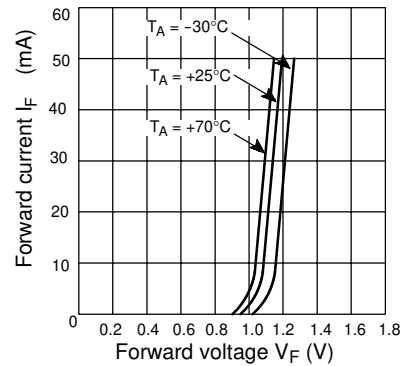


INPUT/OUTPUT CHARACTERISTICS (TYPICAL)

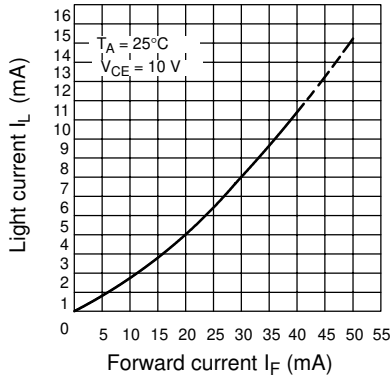


LIGHT CURRENT TEMPERATURE DEPENDENCY (TYPICAL)

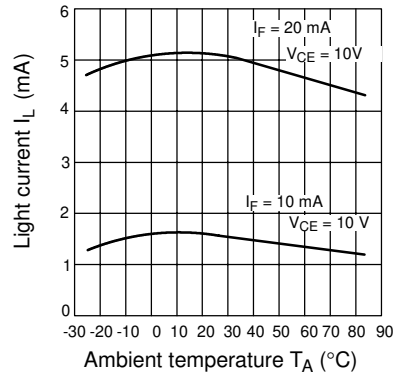


OUTPUT CHARACTERISTIC (TYPICAL)

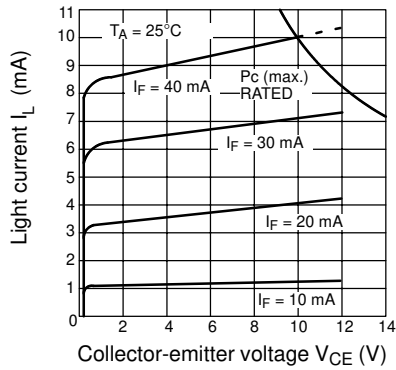


DARK CURRENT TEMPERATURE DEPENDENCY (TYPICAL)

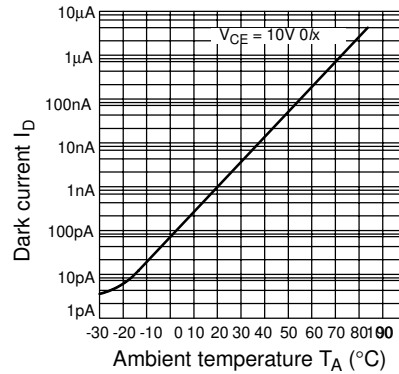

SENSING POSITION CHARACTERISTICS (TYPICAL)

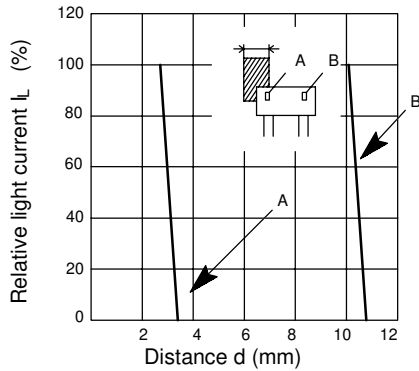

SWITCHING CHARACTERISTICS (TYPICAL)






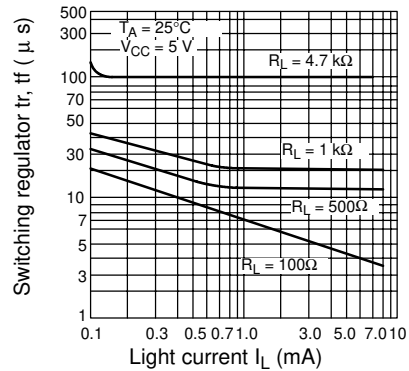


The t_r and t_f are almost the same in length.

Dimensions

Unit: mm (inch)

■ EE-SX1031

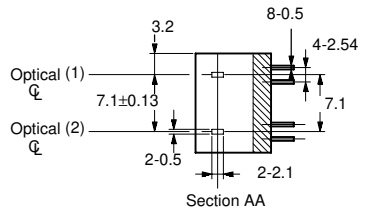

Precautions

Refer to the Technical Information Section for general precautions.

NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.



Omron Europe B.V. EMA-ISD, tel:+31 23 5681390, fax:+31 23 5681397, <http://www.eu.omron.com/ema>