



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## EE-SX4009-P1/P10

### Photo IC Output Photomicrosensors with AMP or Molex Connectors

- Photo IC receiver assures a high output of 16mA at 28 VDC and a high response speed of 3 kHz
- Directly compatible with TTL and CMOS
- Includes Schmitt trigger circuit
- Internal resistor included to protect the LED circuit
- Compatible with AMP (EE-SX4009-P1) or Molex (EE-SX4009-P10) connectors
- Easy screw-mount configuration



### Ordering Information

Appearance	Sensing method	Slot width	Slot depth	Output configuration	Weight	Applicable mating connector	Part number
	Transmissive	5 mm	10.5 mm	Photo IC Light-ON	3.1 g	Omron EE-1005 AMP 171822-3 AMP 171880-3 AMP 172142-3	<b>EE-SX4009-P1</b>
					3.5 g	U.S. Molex 50-57-9403 15-47-4033 14-56-2036 (AWG 28) 14-56-2034 (AWG 26) 14-56-2032 (AWG 24) 14-56-7037 (AWG 22)	<b>EE-SX4009-P10</b>

### Specifications

#### ■ ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C)

Item	Symbol	Rated value	
Supply voltage	V <sub>CC</sub>	10 VDC	
Output voltage	V <sub>OUT</sub>	28 V	
Output current	I <sub>OUT</sub>	16 mA	
Output power dissipation	P <sub>OUT</sub>	250 mW	
Ambient temperature	Operating	Topr	-20°C to +75°C (-4°F to 167°F)
	Storage	Tstg	-40°C to +85°C (-40°F to 185°F)


**ELECTRICAL CHARACTERISTICS**  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{ V} \pm 10\%$

Item	Symbol	Value	Condition
Consumption current	$I_{CC}$	30 mA max.	With or without incident light
Low level output voltage	$V_{OL}$	0.3 V max.	$I_{OUT} = 16\text{ mA}$ without object
High level output voltage	$V_{OH}$	$(V_{CC} \times 0.9)\text{ V min.}$	$V_{OUT} = V_{CC}$ , $R_L = 47\text{ k}\Omega$ with object
Response frequency	$f$	3 kHz. min.	$V_{OUT} = V_{CC}$ , $R_L = 47\text{ k}\Omega$

**RECOMMENDED OPERATING CONDITION (WITHIN THE RATED TEMPERATURE RANGE)**

Item	Symbol	Recommended Value	Remarks
Supply voltage	$V_{CC}$	$5\text{ V} \pm 10\%$	Refer to Engineering Data (Temperature Characteristics) and keep the output voltage and current as low as possible in the recommended range.
Output voltage	$V_{OUT}$	4.5 to 28 V	
Output current	$I_{OUT}$	16 mA max.	


Note: The value of the response frequency is measured by rotating the disk as shown below.

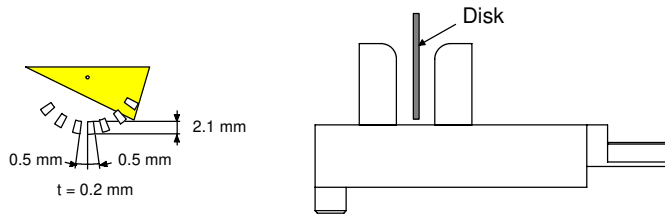


Engineering Data

Note: The operating conditions of the photomicrosensor must be within the absolute maximum rating ranges.


**TEMPERATURE CHARACTERISTICS**

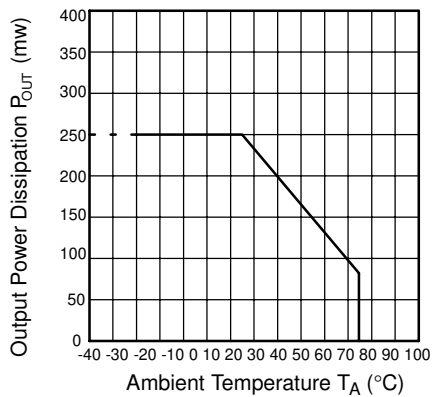

**SENSING POSITION CHARACTERISTICS**

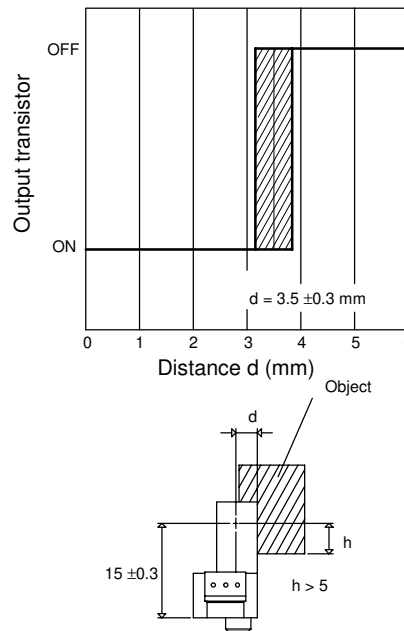


### REPEATED SENSING POSITION CHARACTERISTICS

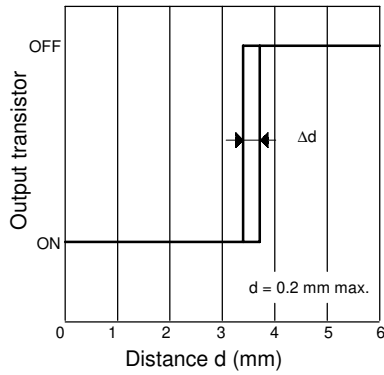


## Operation

### INTERNAL/EXTERNAL CIRCUIT DIAGRAM

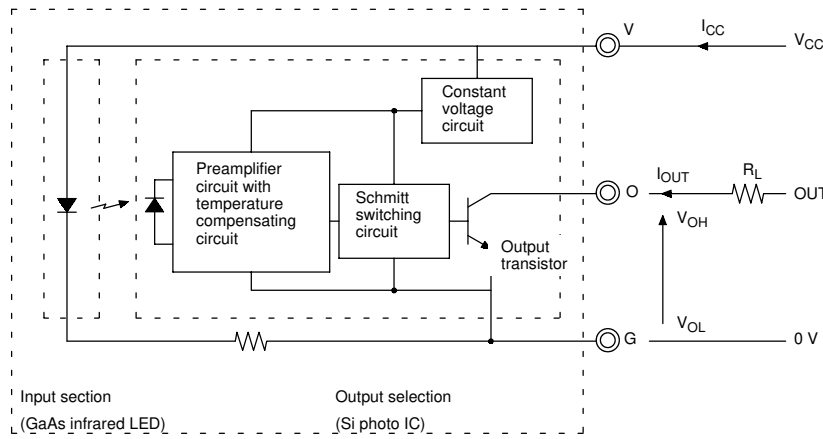





### TIMING CHART

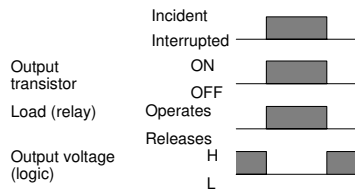

# Dimensions

Unit: mm (inch)

EE-SX4009-P1

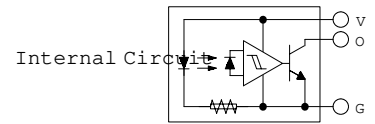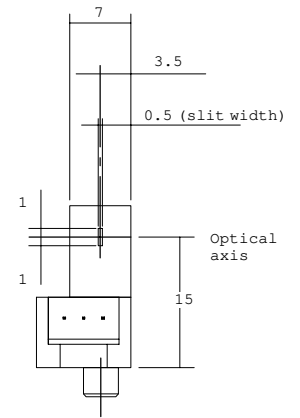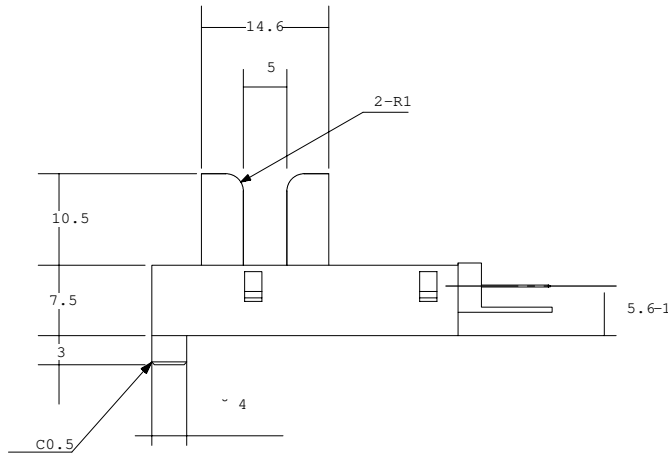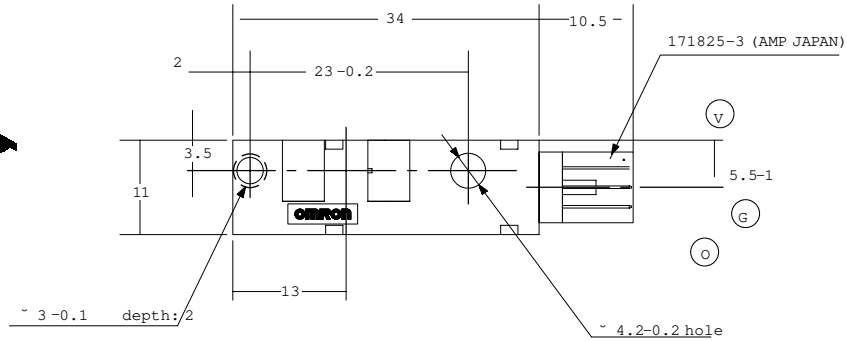

Terminal No.	Name