

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









EF-29615-000 SHT I.I


NOTES:

➤A POSITIVE GOING VOLTAGE AT TERMINAL 2, RELATIVE TO TERMINAL I, CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLET.

➤ LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED $TO \pm 0.17 [.007].$

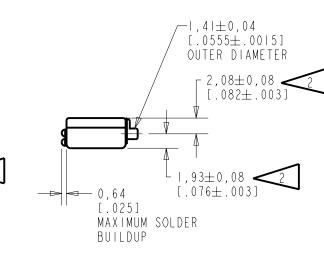

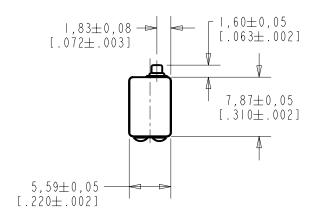

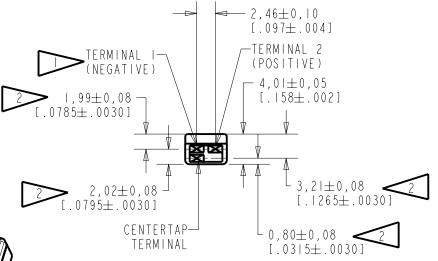

NOMINAL WEIGHT .66 GRAM

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.


1101101011	NEELNOL ELVEL				1121101011
Α	C10103437	11-29-05	Release	e d	Α
SCALE:		2:1		DR. BY	DATE
DO NOT SCALE DRAWING					11-29-05 DATE
TITLE:	RE	CEIVER	EF-29615-000	GJP APP. BY	11-29-05 DATE
	OUTL	INE DRAWING	SHT I.I	G J P	11-29-05 Rev: B

Revision C.O. # Implementation Date

RELEASE LEVEL

REVISION



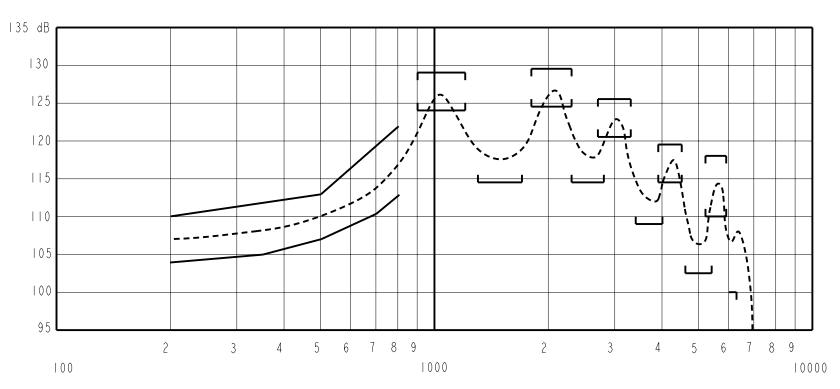

NOTES: FREQUENCY IN HERTZ

I. MEASUREMENTS MADE USING 8mm (.315") X Imm (.039") ID + 28mm (I.10") X I.5mm (.059") ID EAR HOOK SIMULATOR INTO 25mm (.984") OF 2mm (.079") ID TUBE + 18mm (.709") OF 3MM (.118") ID TUBE + 2cm³ CAVITY (AS IEC126). (T-2607 AND B & K DB0138).

FREQUENCY	MIN.	MAX.
200	104.0	110.0
350	105.0	
500	107.0	113.0
700	110.5	
800	113.0	122.0
900-1200	124.0	129.0
1300-1700	114.5	
1800-2300	124.5	129.5
2300-2800	114.5	
2700-3300	120.5	125.5
3400-4000	109.0	
3900-4500	114.5	119.5
4600-5400	102.5	
5200-5900	110.0	118.0
<6300	100.0	

- 3. RESPONSE, IMPEDANCE, AND DISTORTION MEASUREMENTS MADE USING THE ELECTRICAL TEST CONDITIONS SHOWN BELOW.
- 4. ELECTRICAL SOURCE IMPEDANCE MUST BE GREATER THAN 20 TIMES IKHZ IMPEDANCE FOR TEST CONDITIONS SHOWN BELOW.
- 5. INDIVIDUAL SPECIFICATIONS.

PORT LOCATION	IMPEDANCE OHMS ±15%		DCR @20°C	DISTORTION		ELECTRICAL TEST CONDITIONS	
	IKHz	500Hz	OHMS ±10%	MAX. %	FREQ Hz	AC mA RMS	DC mA
IS	345	135	48.5	10	500	1.56	0.00

Kevision	C.O. #	Implementation Date	KELEASE LEVEL	KEA1210N
			Released	ι Δ Ι
А	C10103437	11-29-05	No 10 do 0 d	/ \

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

CRITERIA, CORRELATION	SED TO ESTABLISH INCOMING OF TEST EQUIPMENT WITH KNO NT AND TEST METHOD VARIATI		
TITLE: RE	CEIVER	EF-29615-000	-
PERFORMA	NCE SPECIFICATION	SHT 2.1	

	DR. BY	DATE	
	MMM	11-29-05	
	CK. BY	DATE	
	GJP	11-29-05	
	APP. BY	DATE	
ı	C ID	11-20-05	