imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





No. A229-040403L-01

Date 3rd Apr. '04



Data Sheet

CDMA800 Rx SAW Filter							
t							

Issued Check

M. Takada K, Nishimura

CIRCUIT COMPONENTS BUSINESS UNIT

MATSUSHITA ELECTRONIC COMPONENTS CO., LTD

KADOMA, OSAKA, JAPAN

То

----- Unbalanced input and balanced output -----

Part No. :


<u>Design No. : T881J1</u>

Parameter		Frequency	Your request			Our preliminary spec.			Unit
			Min.	Тур.	Max.	Min.	Тур.	Max.	
Passband			869 894		869 894			MHz	
Insertion loss		869 894MHz					1.5	2.0	dB
Ripple in passband		869 894MHz					0.4	1.0	dB
Amplitude imbalance		869 894MHz				-1.0	-0.2 +0.4	+1.0	dB
Phase imbalance		869 894MHz				-10	-1.0 +5.0	10	deg.
Attenuation	Att1	DC 824MHz				50	68		dB
	Att2	824 849MHz				40	50		dB
	Att3	915 1000MHz				20	23		dB
	Att4	1000 1738MHz				40	52		dB
	Att5	1738 6000MHz				50	60		dB
VSWR	Input	869 894MHz					1.6	2.0	
	Output	869 894MHz					1.6	2.0	
Input impedance (Single Ended)							50		Ohm
Output impedance (Differential)							100		Ohm
Maximum drive level								13	dBm
Operating temperature						-30		+85	deg. C
Storage temperature						-40		+85	deg. C

----- Unbalanced input and balanced output -----


Part No. :

Design No. : T881J1

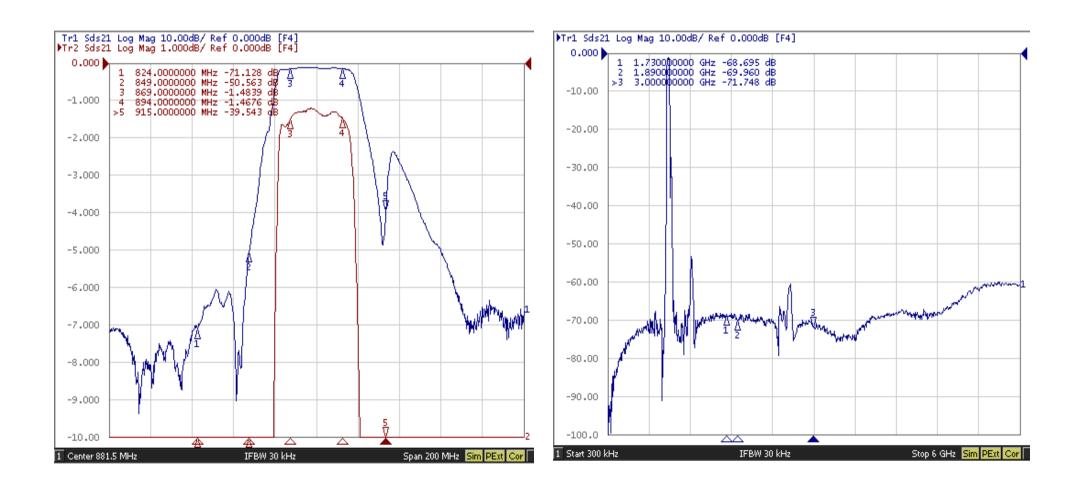

----- Unbalanced input and balanced output -----


Part No. : Design No. : T881J1

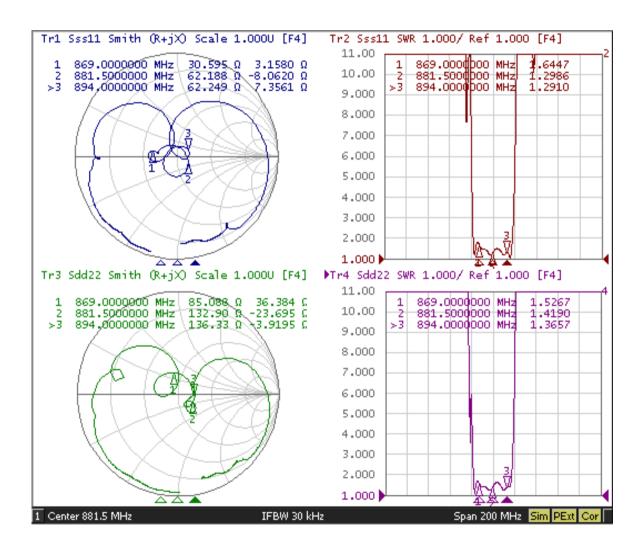



----- Unbalanced input and balanced output -----

Part No. :

Design No. : T881J1

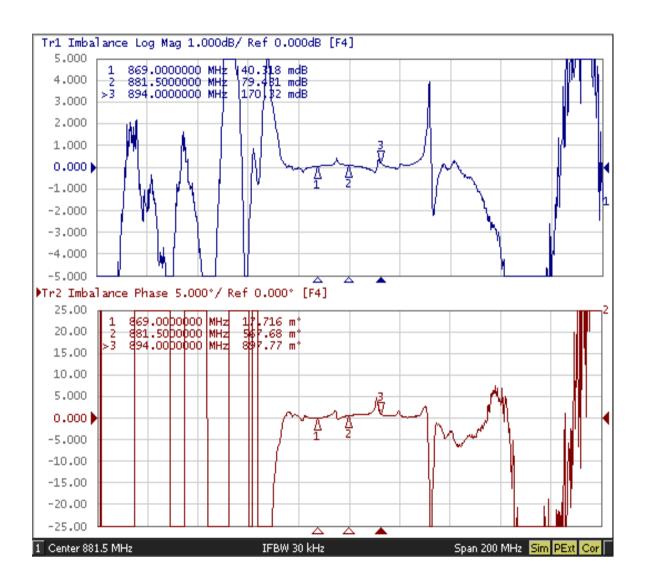


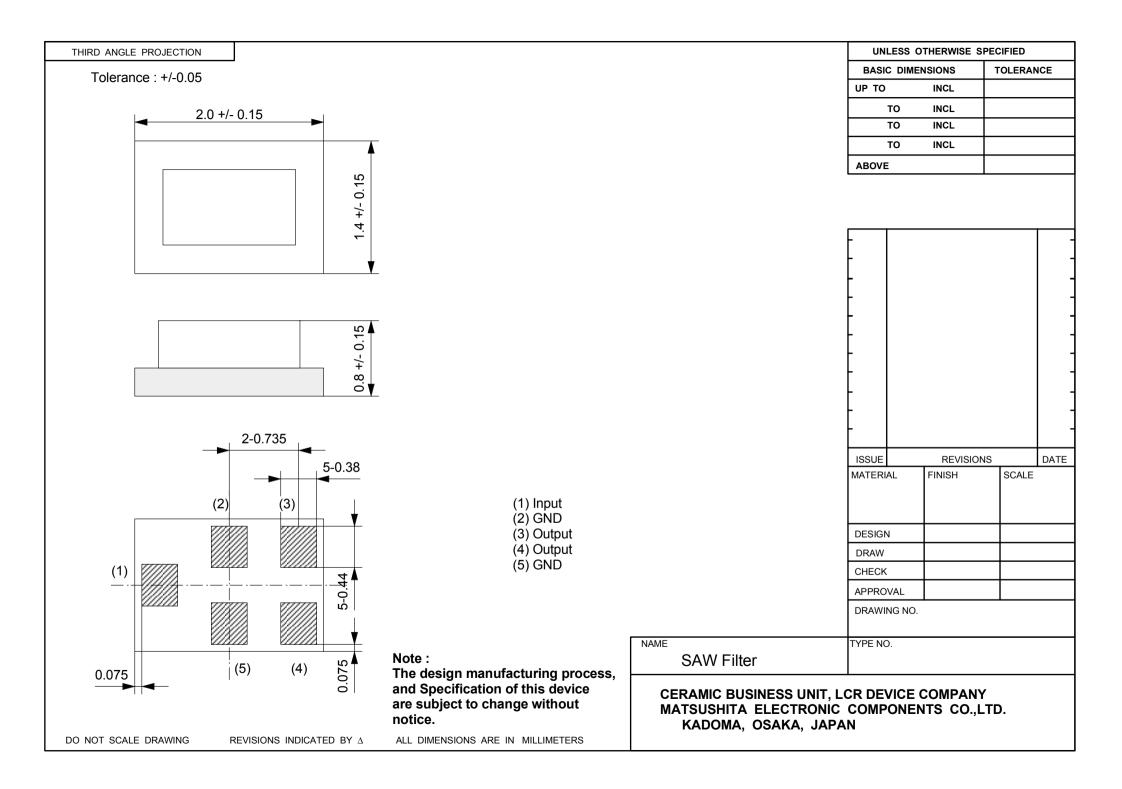

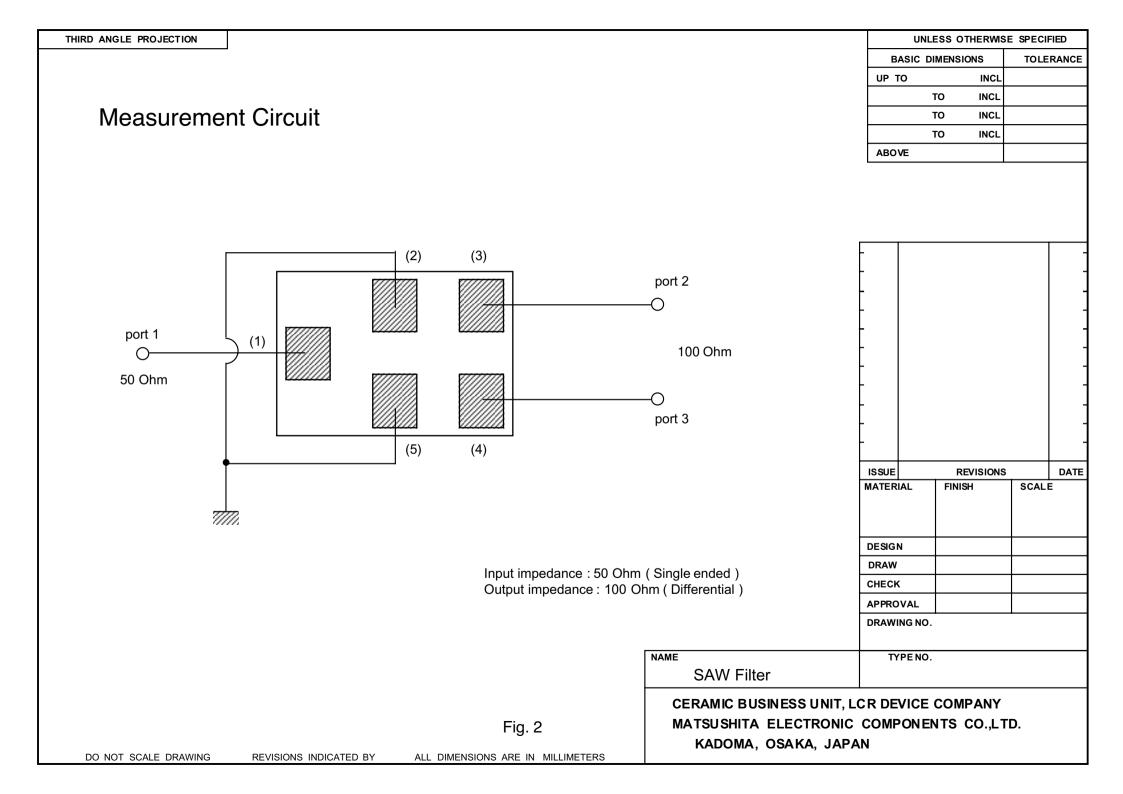



<u>Recommended land pattern</u>

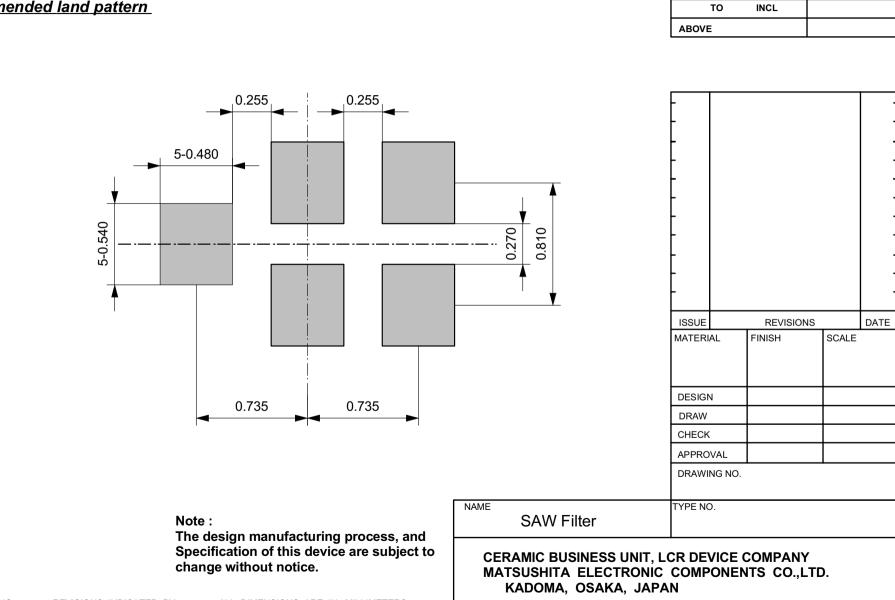

UNLESS OTHERWISE SPECIFIED

INCL

INCL

INCL

TOLERANCE

BASIC DIMENSIONS

то

то

UP TO

DO NOT SCALE DRAWING