



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SERIES EG1390 SWITCHES



E-SWITCH™

SLIDE SWITCHES



FEATURES & BENEFITS

Tape & Reel Packaging
2-position
Surface Mount
Sub-miniature

APPLICATIONS / MARKETS

Computer Servers/peripherals
Consumer electronics
Instrumentation
Test & measurement

MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	200 +/- 150 gf in both directions
Travel:	1.5 +/- 0.1mm each position

ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 4VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	100VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10°C to +60°C
Storage Temperature:	-20°C to +70°C

HOW TO ORDER:

SERIES


EG

MODEL





1390

ACTUATOR


A = 1.0mm
B = 2.0mm



SCHEMATIC

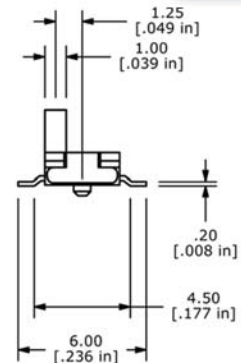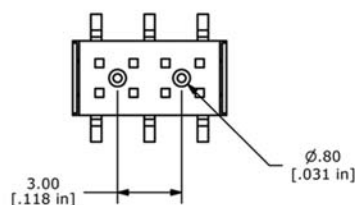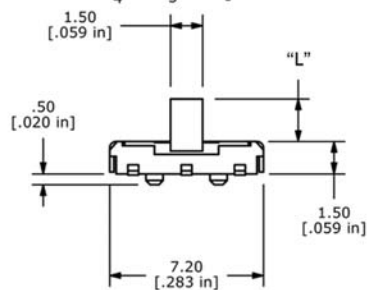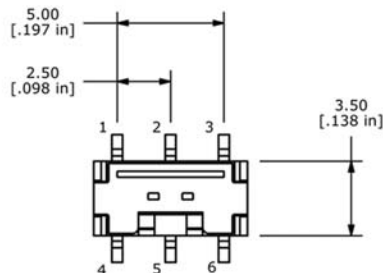

Model	"L" Dimension
1390 A	1.00 mm
1390 B	2.00 mm

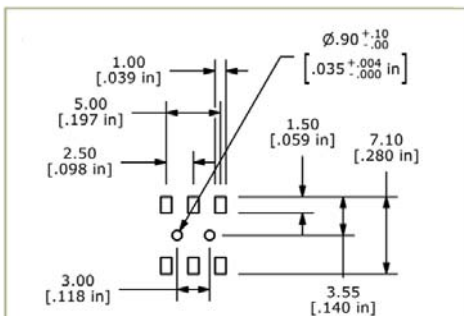

MOUNTING