



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## EHA-PA1AN1-R04



Mini-Harvester Thermal Energy Generator  
Solid to Air

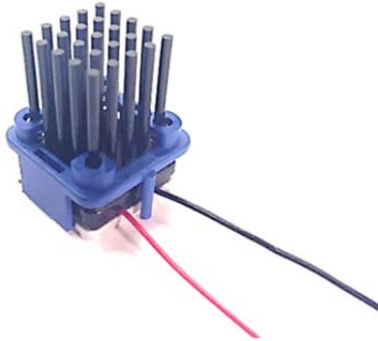

### TYPICAL PERFORMANCE VALUES

AC Resistance @27°C ( $\Omega$ ):	3.86
Max Hot Side Temp (C):	85°C
Thermal $R_{Base - Amb}$ @ 0mph (C/W)	33
Thermal $R_{Base - Amb}$ @ 3mph (C/W)	23.5
Typical Load ( $\Omega$ )	(4.0-16)
Optimal Load ( $\Omega$ )	6.2 $\Omega$

### MECHANICAL CHARACTERISTICS


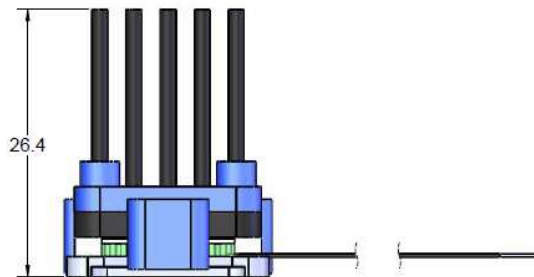
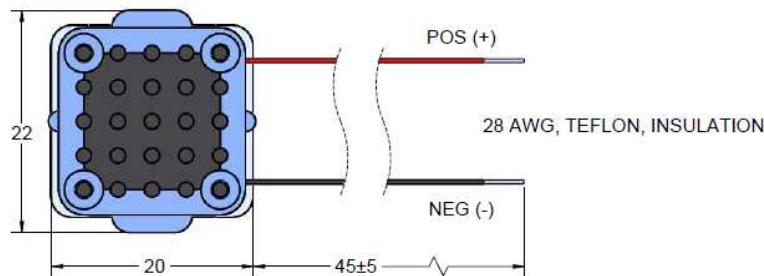


### ORDERING OPTIONS

Model Number	Description
EHA-PA1AN1-R04	Mini-Harvester Energy Generator Assembly Solid to Air

### PRODUCT FEATURES

- Low cost, small package thermal energy harvester.
- Alternative for replaceable primary cell batteries.
- Compatible with vertical and horizontal surfaces.
- Compatible with commercially available power management electronics.
- Non-invasive installation.
- Anodized for corrosion protection.
- Maximum hot side temperature of 85°C.

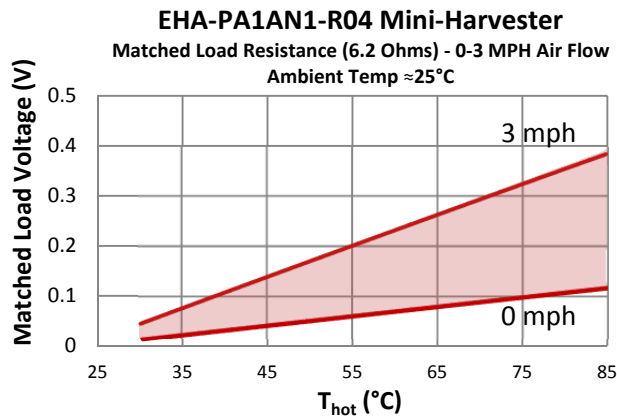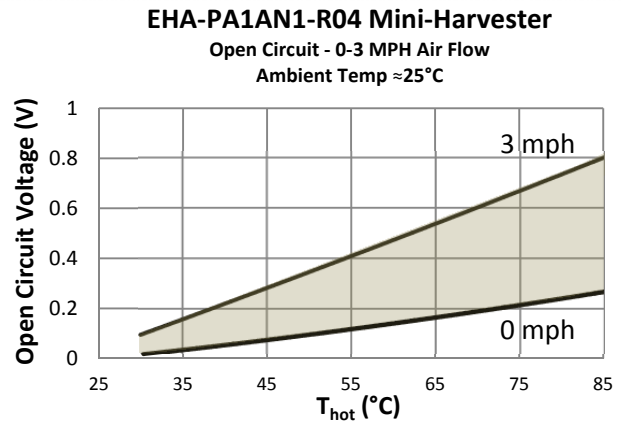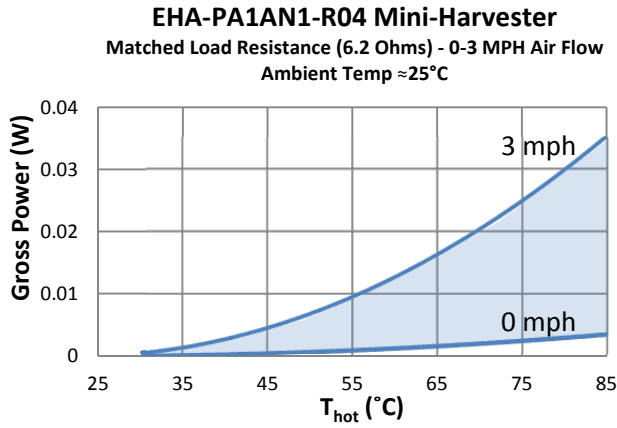

Air Flow (MPH)	0	3	0	3
Hot Side Temperature (°C)	85	85	55	55
Cold Side Temperature (°C)	25	25	25	25
Gross Power (W)	0.005	0.035	0.001	0.01
Open Circuit Voltage (V)	0.27	0.8	0.11	0.4
Matched Load Voltage (V)	0.11	0.39	0.06	0.2

**Power Output**

Power from the harvester is generated by converting heat energy into electrical energy. The amount of electrical power produced is a function of the temperature differential between source and ambient, as indicated by the performance curves. Voltage boost and power conditioning electronics and reference designs are commercially available from many semiconductor manufacturers. These include the Texas Instruments BQ25504, EM Microelectronic EM8900, and Linear Technologies LTC3107, LTC3108, LTC3109.

**Installation**

Recommended mounting methods: Remove insulation and any remaining debris from the surface to allow effective thermal contact. Assembly should be adhered to surface with a thermally conductive adhesive or epoxy suited for the application environment. Bond line should be minimized to reduce thermal interface resistance.

**Operation Cautions**

For maximum reliability, ambient temperatures are limited between -40°C to 60°C during continuous operation. Maximum hot side temperatures are restricted to 85°C.

**CONTACT US:**

For customer support or general questions please contact a local office below or visit our website at [www.marlow.com](http://www.marlow.com).

Marlow Industries, Inc.  
10451 Vista Park Road  
Dallas Texas 75238-1645  
214-340-4900 (tel)  
214-341-5212 (fax)  
877-627-5691 (tech support)  
[www.marlow.com](http://www.marlow.com)

Marlow Industries Europe GmbH  
Brunnenweg 19-21  
64331 Weiterstadt  
Germany  
Tel.: +49 (0) 6150 5439 - 403  
Fax: +49 (0) 6150 5439 - 400  
[info@marlow-europe.eu](mailto:info@marlow-europe.eu)

II-VI Japan Inc.  
WBG Marive East 17F  
2-6 Nakase, Mihama-ku  
Chiba-Shi, Chiba 261-7117  
Japan  
81 43 297 2693 (tel)  
81 43 297 3003 (fax)  
[center@ii-vi.co.jp](mailto:center@ii-vi.co.jp)  
[www.ii-vi.co.jp](http://www.ii-vi.co.jp)

II-VI Singapore Pte., Ltd.  
Blk. 5012, Techplace II  
#04-07 & 05-07/12, Ang Mo Kio Ave. 5  
Singapore 569876  
(65) 6481 8215 (tel)  
(65) 6481 8702 (fax)  
[info@ii-vi.com.sg](mailto:info@ii-vi.com.sg)  
[www.ii-vi.com.sg](http://www.ii-vi.com.sg)

Marlow Industries China, II-VI  
Technologies Beijing  
A subsidiary of II-VI Incorporated  
Rm 202, 1# Lize 2nd Middle Road  
Wangjing, Chaoyang District  
Beijing 100102 China  
010-64398226 ext 105 (tel)  
010-64399315 (fax)  
[info@iivibi.com](mailto:info@iivibi.com)