



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Type : **Balun**


Part No : **EHF** \_ \_ \_ \_ \_

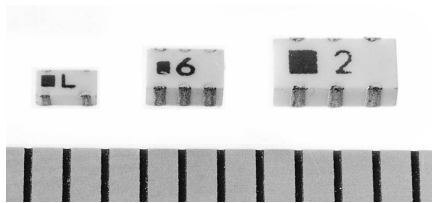

## ■ Features

- Ultra miniaturized, thin type (1.6×0.8×t 0.65)
- Available for each frequency range (300 MHz to 4000 MHz)
- Balanced / Unbalanced Converter
- Impedance matching (50 Ω/50 Ω, 50 Ω/100 Ω, 50 Ω/200 Ω)

## ■ An Equivalent Circuit

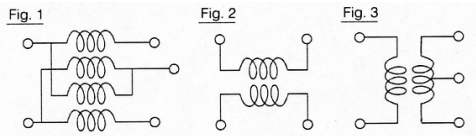

## ■ Recommended Applications

- Digital portable telephone
- Dual mode portable telephone
- Personal handy-phone system
- Mobile communication system

## ■ Typical Characteristics

Part No. Items	FD 1622	FD 1620	FD 1629	FD 1617	FD 1618	FD 1619	1BD 0380	1BD 0800	1BG 0836	1BG 1800	2BD 1800	2BD 1900	2BD 2060
Frequency (MHz)	824 to 894	880 to 960	1700 to 2000	380 to 430	880 to 960	1700 to 2000	380 to 430	824 to 894	824 to 894	1700 to 1910	1700 to 1910	1800 to 2000	1920 to 2170
Insertion Loss (dB)	1.0 max.	2.0 max.	1.0 max.	1.0 max.	1.0 max.	0.8 max.	2.0 max.	2.0 max.	0.8 max.	0.8 max.	1.0 max.	1.0 max.	1.0 max.
Difference of Phase (deg)	180±15	180±15	180±10	180±10	180±15	180±15	180±15	180±15	180±10	180±10	180±15	180±15	180±15
Impedance (Ω)	50 / 200	50 / 200	50 / 50	50 / 200	50 / 50	50 / 50	50 / 50	50 / 50	50 / 200	50 / 200	50 / 50	50 / 50	50 / 50
Circuit Diagram	Fig.1	Fig.1	Fig.2	Fig.1	Fig.2	Fig.2	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3
Dimension No.	※2	※2	※2	※4	※4	※4	※5	※5	※5	※5	※3	※3	※3

Part No. Items	2BD 2450	2BE 0920	2BE 1600	2BE 1800	2BE 1900	2BE 2060	2BE 2450	2BE 3635	2BG 1800	2BG 2060	2BG 2450	4BD 2450	4BE 5250
Frequency (MHz)	2400 to 2500	880 to 960	1520 to 1720	1700 to 1910	1800 to 2000	1920 to 2170	2400 to 2500	3400 to 4000	1700 to 1910	1920 to 2170	2400 to 2500	2400 to 2500	5150 to 5350
Isolation Loss (dB)	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.2 max.
Difference of Phase (deg)	180±15	180±15	180±15	180±15	180±15	180±15	180±15	180±20	180±15	180±15	180±15	180±15	180±15
Impedance (Ω)	50 / 50	50 / 100	50 / 100	50 / 100	50 / 100	50 / 100	50 / 100	50 / 100	50 / 200	50 / 200	50 / 200	50 / 50	50 / 100
Circuit Diagram	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3
Dimension No.	※3	※3	※3	※3	※3	※3	※3	※3	※3	※3	※3	※1	※1

(The attention) : It omits EHF.

## ■ Dimensions in mm (not to scale)

