



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Elinx™ EIR405-SFP-T

5 Port Gigabit Industrial Ethernet Switch with SFP Port for Gigabit Fiber

- ✓ 4 10/100/1000 Base-T Ethernet Ports
- ✓ 1 SFP Slot for Gigabit Fiber
- ✓ 3000V EFT & 4000V ESD Protection
- ✓ Dual 12 to 48 VDC Power Inputs
- ✓ Wide Operating Temperature



The *EIR405-SFP-T* is a 5 Port Unmanaged Industrial Gigabit Ethernet Switch. In addition to 4 standard copper RJ-45 ports, it has an SFP slot to accommodate Gigabit Fiber.

Small Form-factor Pluggable (SFP) Port: The SFP Port provides flexibility when planning a network. The slot can accept any SFP fiber module. Modules are available in multiple formats.

High-Speed Transmissions: The EIR405-SFP-T includes a switch controller that automatically senses transmission speed (10/100/1000 Mbps). The RJ-45 interface also auto-detects MDI or MDI-X, eliminating the requirement for a crossover cable. Each port is buffered and supports store-and-forward protocol.

Dual Power Input: To reduce the risk of power failure, the EIR405-SFP-T provides two 12 to 48 VDC power inputs. If the power fails, the switch will automatically use the secondary power input. Also, if the power goes out the corresponding P1 or P2 LED will go out and the Fault LED will light. The contacts for the alarm output will also open.


Flexible Mounting: The switch features a space saving IP30 metal enclosure that can be DIN or Panel mounted.

Transient Protection: The power line input on the EIR405-SFP-T offers protection from up to 3,000 V EFT. The Ethernet ports offer up to 4,000 V ESD protection. These features make the switch more reliable and suitable for use in harsh electrical environments.

Wide Operating Temperature: With an operating temperature of -40 to 75°C (-40 to 167°F), this switch is suitable for use in some of the harshest industrial environments that exist.

Easy Troubleshooting: There are two LED indicators for each port that display the link status and transmission speed. Three LED indicators for power (P1, P2 and Fault) show power status. These indicators allow you to quickly diagnose and correct problems and ensure your network remains reliable.

B&B Electronics' Elinx™ Brand Ethernet Switches are your number one choice for reliable performance in harsh industrial environments.

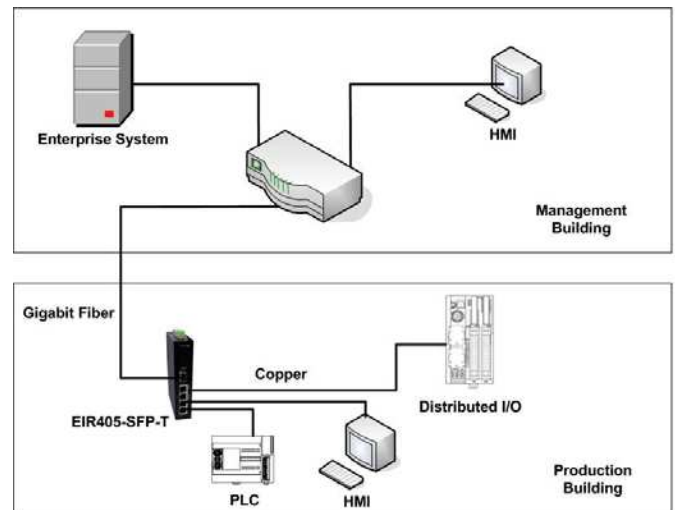

Ordering Information

Model Number	Description
EIR405-SFP-T	Industrial Gigabit Switch (4 CU, 1 SFP)
Accessories	
SFP-1000SX-M-550M-T	SFP 1000Base-FX, MM 550M, LC
SFP-1000LX-S-10KM-T	SFP 1000Base-FX, SM 10 KM, LC
SFP-1000LX-S-20KM-T	SFP, 1000Base-FX, SM 20 KM, LC
MDR-60-24	24VDC, 2.5A DIN Mount Power Supply

Specifications

Regulatory	
Approvals	FCC, CE, UL UL File Number: E173795
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6



Specifications

IEEE Standards

IEEE 802.3	802.3. 10Base-T Ethernet
IEEE 802.3u	100Base-TX and 100Base-FX Fast Ethernet
IEEE 802.3ab	1000Base-T
IEEE 802.3x	Flow Control and Back Pressure

Network Specifications

Architecture	Back-plane (Switching Fabric): 10Gbps Throughput (Full-dup): 14.88Mpps@64bytes
Transfer Rate	14,880 pps Ethernet Port 148,800 pps Fast Ethernet Port 1,488,000 pps Gigabit Fiber Ethernet

Buffer	136 Kbits
MAC Table	8K
Jumbo Frame	9Kbytes
Misc	Broadcast Storm Filtering CSMA/CD

Interface

RJ-45 Ports	4 x 10/100/1000BaseT, Auto MDI/MDI-X
ESD Protection	4000V ESD Protection
SFP	1 x Mini-GBIC SFP Socket
LED Indicators	P1 (Power 1), P2 (Power 2), Fault (Power Fault), LINK/ACT (SFP Port) RJ-45 Ports have 2 LED's to indicate LINK and activity

Power

Input Voltage	Dual 12 to 48 VDC Inputs Reverse Polarity Protection
Power Connection	Removable Terminal Block
Wire Size	12 to 24 AWG
Power Use	5.5 Watts
Fault Output	1 Relay Output – Normally Closed
EFT Protection	3000 V EFT Protection

Environmental

Op. Temp	- 40 to 75°C (-40 to 167°F)
Storage Temp	- 40 to 85°C (-40 to 185°F)
Op. Humidity	0 to 95%

Mechanical

Enclosure	IP30 Metal Enclosure
Mounting	35mm DIN Rail or Panel Mount Attachments
Dimensions	3.0 x 9.7 x 14.0 cm (1.2 x 3.8 x 5.5 in)

