



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Ethernet Coaxial Extender for 10/100 Networks

EIS-EXTEND-C



## PRODUCT FEATURES

- One 10/100Base TX (TX) Ethernet port with RJ-45 connector
- Auto negotiation of speed and duplex mode on TX port
- Auto MDI/MDIX on Ethernet port
- IEEE 802.3 10BaseT and IEEE 802.3u 100BaseTX compliant
- Line port uses BNC connector or F-Type connector
- Line port link is full-duplex up to 85Mbps over existing coaxial cable
- One DIP switch for configuring local or remote mode
- Status LED's for monitoring and connection status
- External AC to DC power adapter included
- Used as a stand-alone device or with a 19 inch rack chassis
- Hot-swappable when used in 19 inch rack chassis

The model EIS-EXTEND-C allows your existing coaxial cable to be used to extend Ethernet connections up to 8530 feet (2,600 M).

Two EIS-EXTEND-C models are required for the Ethernet extension, (one at each end of your extension points). This product can be used with included power supply or in a 19 inch rack mount chassis, which can house up to 16 EIS-EXTEND-C units or EIS Media Converters.

## ORDERING INFORMATION



MODEL NUMBER	DESCRIPTION
EIS-EXTEND-C	10/100-TX Ethernet Copper Extender w/USA Power Adaptor
EIS-EXTEND-C-UK	10/100-TX Ethernet Copper Extender w/USA Power Adaptor
EIS-EXTEND-C-EU	10/100-TX Ethernet Copper Extender w/EU Power Adaptor

## ACCESSORIES

EIS-RACK-PS - Power Supply For EIS-Rack-16, 84 Watts

EIS-RACK-16 - Media Converter 19 Inch 2U Rack Chassis - 16 Slots

## MECHANICAL DIAGRAM

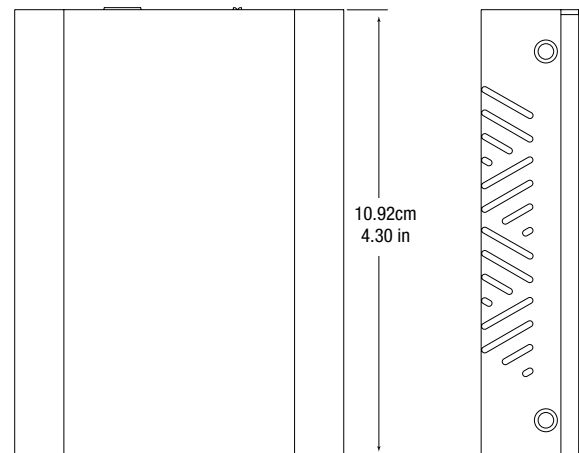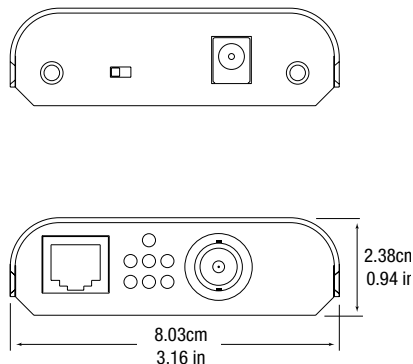

# Ethernet Coaxial Extender for 10/100 Networks

EIS-EXTEND-C



## SPECIFICATIONS

ETHERNET TECHNOLOGY	
Standards	IEEE802.3 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3x, Ethernet over VDSL
Protocols	Transparent to higher layer protocols
Processing Type	IEEE802.3x Full-duplex flow control
INTERFACE	
Ethernet Port	RJ-45, 10/100Base-TX Full/Half-duplex Auto-Negotiation, Auto-MDI/MDIX
Speed	10/100Mbps
Distance	328 ft. (100meters)
Cable	10Base-T: UTP CAT. 3, 4, 5 (2-pair wire), 100Base-TX: UTP CAT. 5 (2-pair wire)
Extender Line Port	BNC Coaxial
Speed	1/5/10/20/30/40/50/60/70/75Mbps
Distance	8,530 ft. (2,600meters)
Cable	Coaxial Cable (5C2V / RG6AU)
POWER	
Input Voltage	12 VDC
Power Consumption	5.76W Max. 0.48A@12VDC
ENVIRONMENTAL	
Operating Temperature:	-10°C to 60°C (14°F to 140°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	5% to 95% (non-condensing)
MTBF	57,515 hours
MTBF Calculation	Parts count reliability prediction
MECHANICAL	
Enclosure	Aluminum case
Dimensions	8.03cm (W) x 10.92cm (D) x 2.38cm (H) 3.16" (W) x 4.30" (D) x 0.94" (H)
Weight	150g (0.33 lb.)

## TOP LEDS (BNC LINE CONNECTIONS)

LEDs	Status	Speed	Distance
1	Green	1~5Mbps	up to 2600M
	Amber	6~10Mbps	up to 2400M
2	Green	11~16Mbps	up to 2000M
	Amber	17~20Mbps	up to 1800M
3	Green	21~29Mbps	up to 1600M
	Amber	30~43Mbps	up to 1400M
4	Green	44~54Mbps	up to 1200M
	Amber	55~63Mbps	up to 1000M
5	Green	64~74Mbps	up to 600M
	Amber	75~85Mbps	up to 200M

## REGULATORY APPROVALS

RoHS - Yes	
Safety	UL60950-1, EN60950-1, IEC60950-1 FCC Part 15, Class A VCCI, Class A
EMI	EN61000-6-3 EN55022, EN61000-3-2, EN61000-3-3 EN61000-6-2 EN61000-4-2 (ESD Standards) Contact: + / - 4KV; Criteria B Air: + / - 8KV; Criteria B EN61000-4-3 (Radiated RFI Standards) 10V/m, 80 to 1000MHz; 80% AM Criteria A EN61000-4-4 (Burst Standards) Signal Ports: + / 2KV; Criteria B D.C. Power Ports: + / 2KV; Criteria B EN61000-4-5 (Surge Standards) Signal Ports: + / - 1KV; Line-to-Line; Criteria B D.C. Power Ports: + / - 0.5KV; Line-to-earth; Criteria B EN61000-4-6 (Induced RFI Standards) Signal Ports: 10Vrms @ 0.15~80MHz; 80% AM Criteria A D.C. Power Ports: 10Vrms @ 0.15~80MHz; 80% AM Criteria A EN61000-4-8 (Magnetic Field Standards) 30A/m @ 50, 60Hz; Criteria A
EMS	
Environmental Test Compliance	IEC60068-2-6 Fc (Vibration Resistance) 5g @ 10~150KHz, Amplitude 0.35mm (Operation/Storage/ Transport) IEC60068-2-27 Ea (Shock) 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport) IEC60068-2-32 Ed (Free Fall) 1M (3.281 ft.)

## FRONT PANEL LEDS (ETHERNET AND LINE CONNECTIONS)

Port	LEDs	Status	Description
Ethernet (RJ-45)	Pwr	Steady	Power on (Pwr stands for POWER)
		Off	Power off
	Lnk/Act	Steady	Valid Ethernet connection established (Lnk stands for LINK)
		Flashing	Transmitting or receiving Ethernet data (Act stands for ACTIVITY)
	Fdx	Off	No valid Ethernet connection nor transmitting/receiving Ethernet data
		Steady	Ethernet connection in full duplex mode (Fdx stands for FULL-DUPLEX)
Line (BNC)	Rmt	Flashing	Collision occurred
		Off	Ethernet connection in half-duplex mode
	Loc	Steady	The device operates in remote mode
		Steady	The device operates in local mode
	Err	Steady	Error occurred
		Lnk	Steady